



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
KEMP QUARRIES / PRYOR STONE [68210]
Machine Id
OHT066
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX AW 68 (--- GAL)

RECOMMENDATION

(Customer Sample Comment: Pm4 performed. All oil samples taken. All oils, and all filters changed.)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0086282	PCA0084303	PCA0084012
Sample Date		Client Info		09 Feb 2024	02 Nov 2023	22 May 2023
Machine Age	hrs	Client Info		64419	63909	63506
Oil Age	hrs	Client Info		1947	1577	1074
Filter Age	hrs	Client Info		510	403	533
Oil Changed		Client Info		Changed	Oil Added	Oil Added
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR










Iron	ppm	ASTM D5185m	>20	0	0	0
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>75	0	0	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Silicon	ppm	ASTM D5185m	>20	7	9	<1
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

Sodium	ppm	ASTM D5185m		0	<1	0
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	2
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m	0	<1	0	0
Magnesium	ppm	ASTM D5185m	0	2	0	0
Calcium	ppm	ASTM D5185m	50	93	68	59
Phosphorus	ppm	ASTM D5185m	330	333	345	335
Zinc	ppm	ASTM D5185m	430	474	453	444
Sulfur	ppm	ASTM D5185m	760	877	868	959
Visc @ 40°C	cSt	ASTM D445	67.4	66.4	67.0	66.0

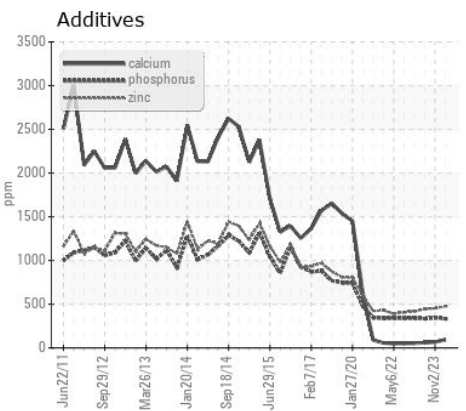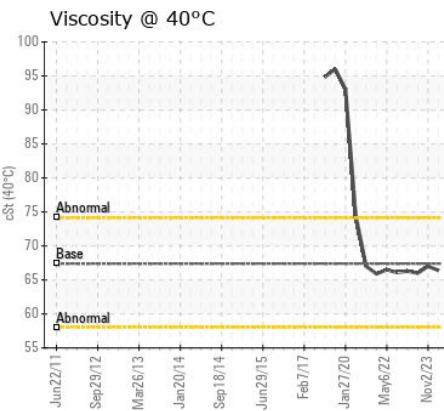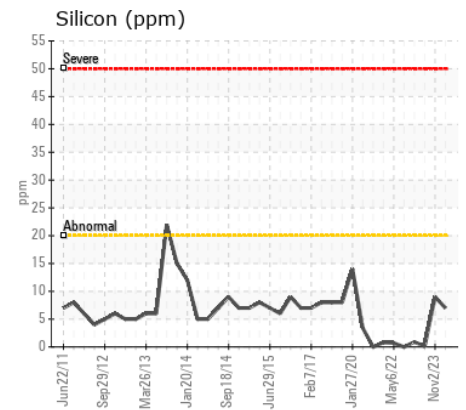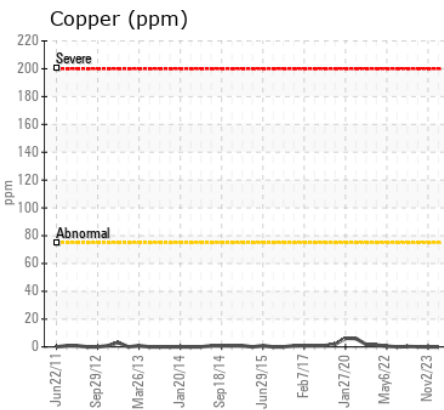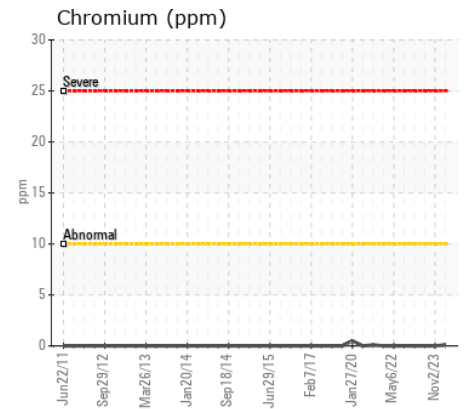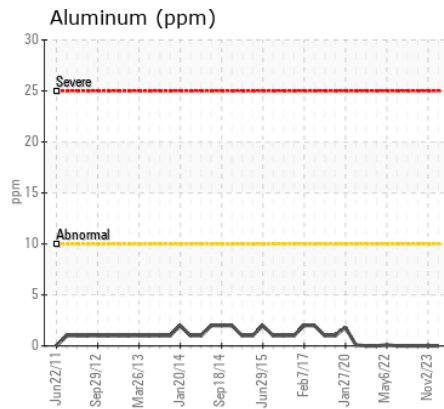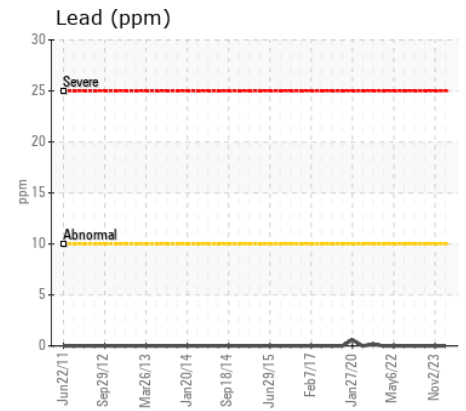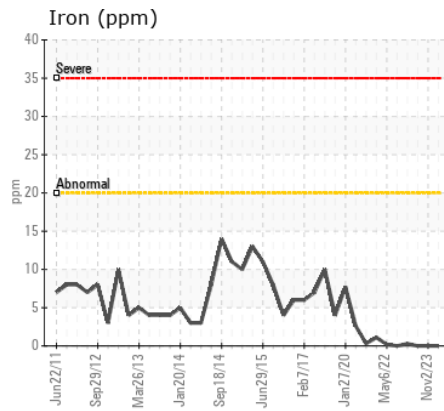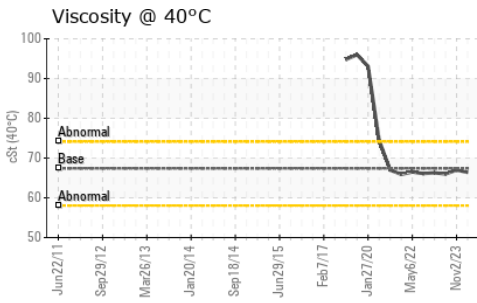

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0086282
Lab Number : 06101262
Unique Number : 10899492
Test Package : MOB 1

Received : 26 Feb 2024
Tested : 28 Feb 2024
Diagnosed : 28 Feb 2024 - Jonathan Hester

Kemp Quarries - Pryor Stone - Pryor
 1050 E 520 Rd
 Pryor, OK
 US 74361

Contact: PRYOR NOTIFICATIONS
 pryor@pryorstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: