



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W49991]
 Machine Id
JOHN DEERE 250D 1DW250DXTDE652468
 Component
Front Left Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0199698	JR0049016	---
Sample Date		Client Info		22 Feb 2024	08 Jun 2020	---
Machine Age	hrs	Client Info		7964	5972	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	26	29	---
Iron	ppm	ASTM D5185m	>750	30	66	---
Chromium	ppm	ASTM D5185m	>9	0	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m	>40	<1	2	---
Lead	ppm	ASTM D5185m	>15	0	0	---
Copper	ppm	ASTM D5185m	>40	3	10	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	VLITE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	2	3	---
Potassium	ppm	ASTM D5185m	>20	<1	<1	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	3	2	---
Boron	ppm	ASTM D5185m		29	12	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		7	16	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m		2	<1	---
Calcium	ppm	ASTM D5185m		27	16	---
Phosphorus	ppm	ASTM D5185m		2619	2155	---
Zinc	ppm	ASTM D5185m		2	21	---
Sulfur	ppm	ASTM D5185m		29985	23194	---
Visc @ 40°C	cSt	ASTM D445		153	146	---

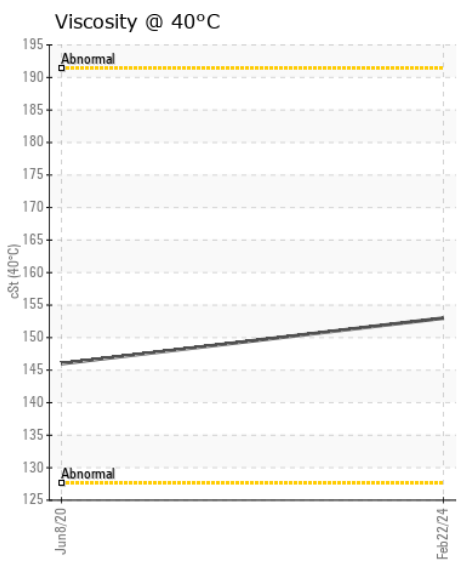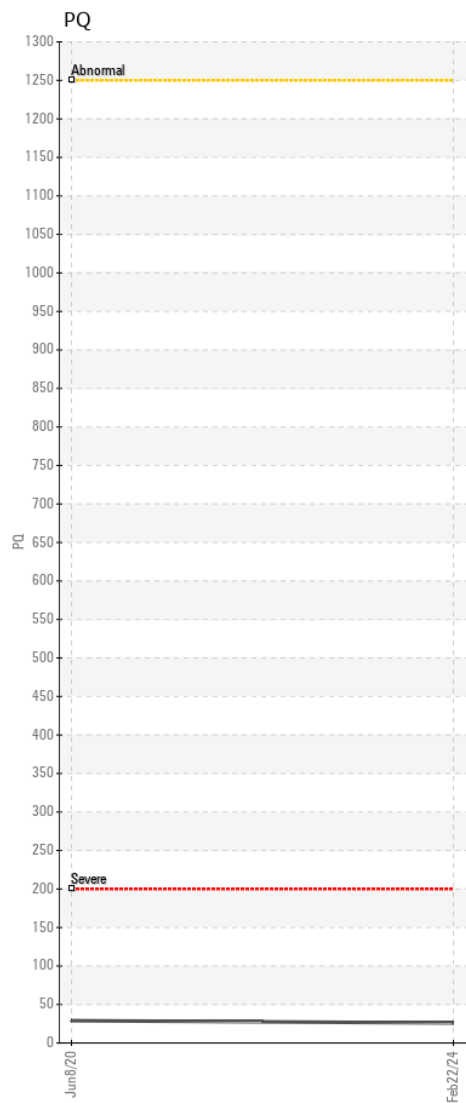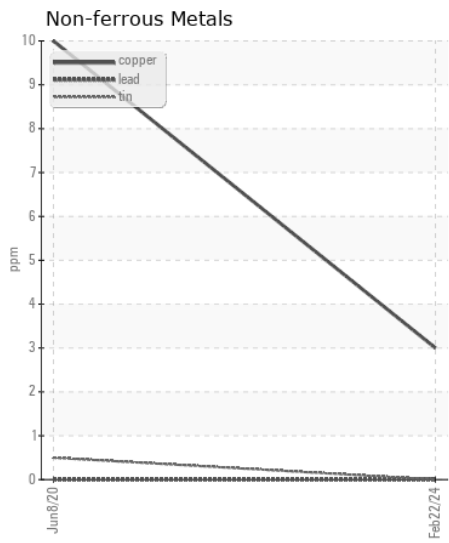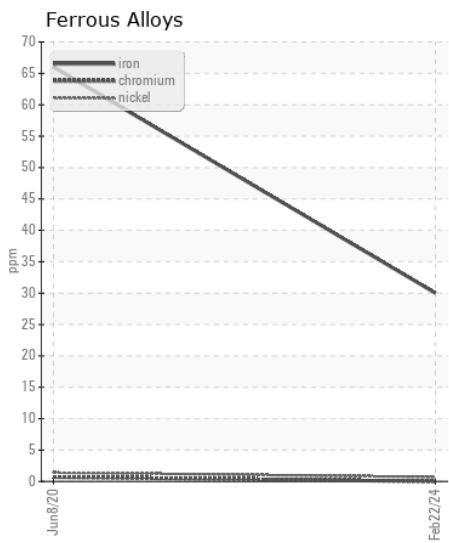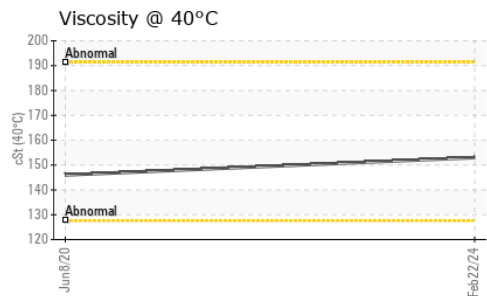

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0199698 **Received** : 27 Feb 2024
Lab Number : 06101970 **Tested** : 29 Feb 2024
Unique Number : 10900200 **Diagnosed** : 29 Feb 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

HENDERSON INC
 5806 MOORETOWN RD
 WILLIAMSBURG, VA
 US 23188
 Contact: TERRY THOMPSON
 terry@hendersoninc.com
 T: (757)603-0418
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)