



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO L60H 621313**

Component  
**Transmission (Auto)**

Fluid  
**VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP438435</b>	---	---
Sample Date		Client Info		<b>23 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>10386</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	<b>35</b>	---	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>50	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>225	<b>14</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	<b>9</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>6</b>	---	---
Boron	ppm	ASTM D5185m	187	<b>109</b>	---	---
Barium	ppm	ASTM D5185m	0.0	<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m	0.0	<b>4</b>	---	---
Magnesium	ppm	ASTM D5185m	6.8	<b>4</b>	---	---
Calcium	ppm	ASTM D5185m	215	<b>180</b>	---	---
Phosphorus	ppm	ASTM D5185m	445	<b>371</b>	---	---
Zinc	ppm	ASTM D5185m	56	<b>49</b>	---	---
Sulfur	ppm	ASTM D5185m	1336	<b>2438</b>	---	---
Visc @ 40°C	cSt	ASTM D445	35.3	<b>28.9</b>	---	---

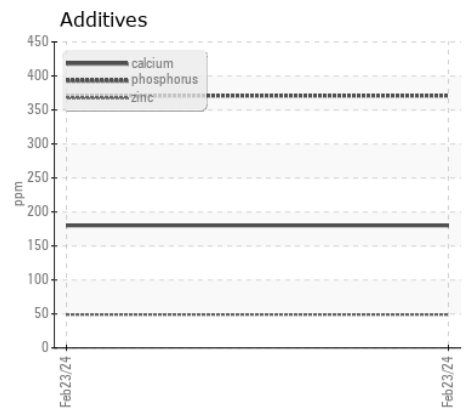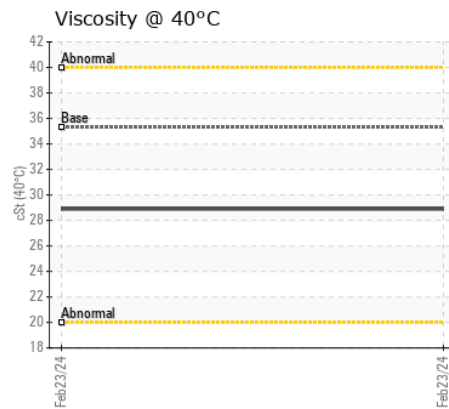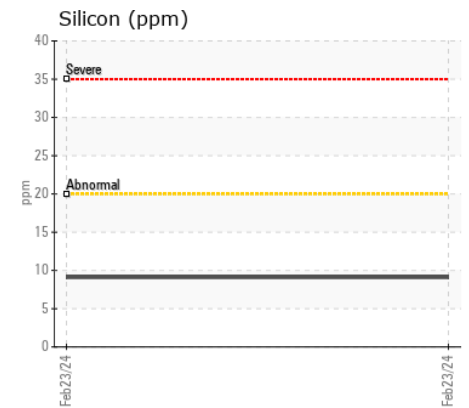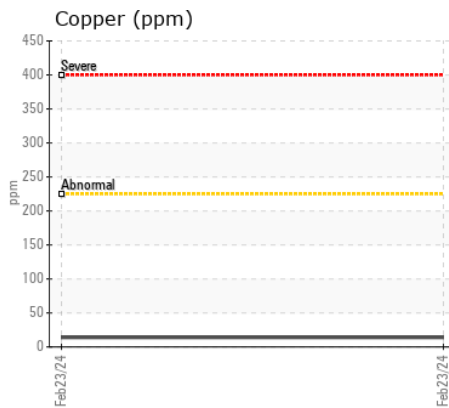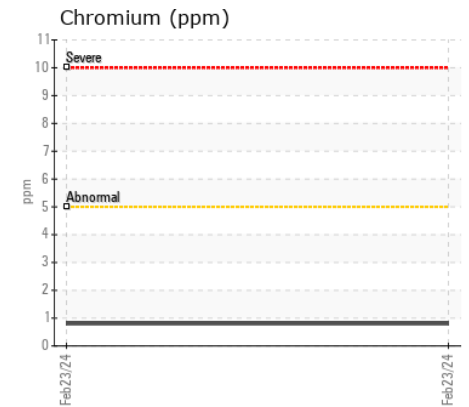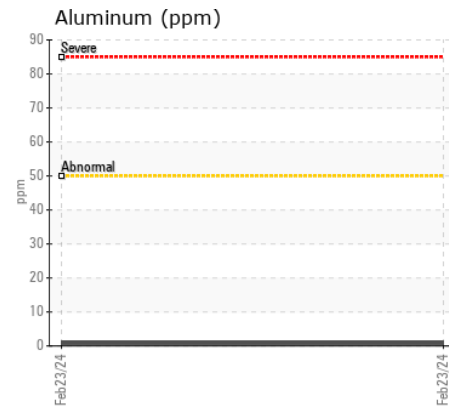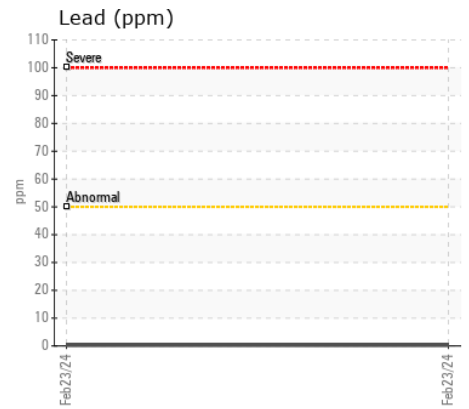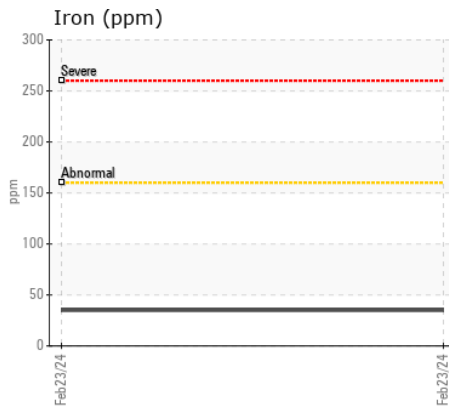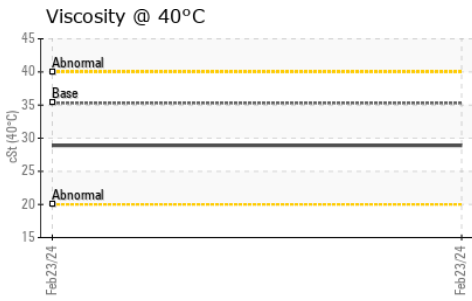

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP438435  
**Lab Number** : 06102101  
**Unique Number** : 10900331  
**Test Package** : MOB 1

**Received** : 27 Feb 2024  
**Tested** : 28 Feb 2024  
**Diagnosed** : 28 Feb 2024 - Wes Davis

**SOUTH FLORIDA EXCAVATION**  
 1455 RAIL HEAD BLVD STE 3  
 NAPLES, FL  
 US 34110-8407

Contact: ROB ANDERSON  
 CHOOEH@EMBARQMAIL.COM/KJ\_GERRARD@YAHOO.COM/ROBDIGSDIRT@AOL.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (239)596-8111  
 F: (239)596-8112