



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**3009154 (S/N 530611)**  
 Component  
**Right Final Drive**  
 Fluid  
**JOHN DEERE GL-5 80W90 (10 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0201267	---	---
Sample Date		Client Info		26 Feb 2024	---	---
Machine Age	hrs	Client Info		597	---	---
Oil Age	hrs	Client Info		597	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		105	---	---
Iron	ppm	ASTM D5185m	>500	183	---	---
Chromium	ppm	ASTM D5185m	>10	4	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	<1	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>50	<1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	18	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m		65	---	---
Barium	ppm	ASTM D5185m		8	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m		0	---	---
Calcium	ppm	ASTM D5185m		● 14	---	---
Phosphorus	ppm	ASTM D5185m		● 514	---	---
Zinc	ppm	ASTM D5185m		● 21	---	---
Sulfur	ppm	ASTM D5185m		15217	---	---
Visc @ 40°C	cSt	ASTM D445		184	---	---

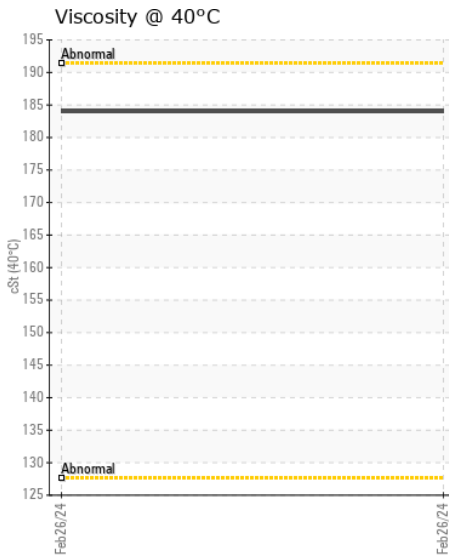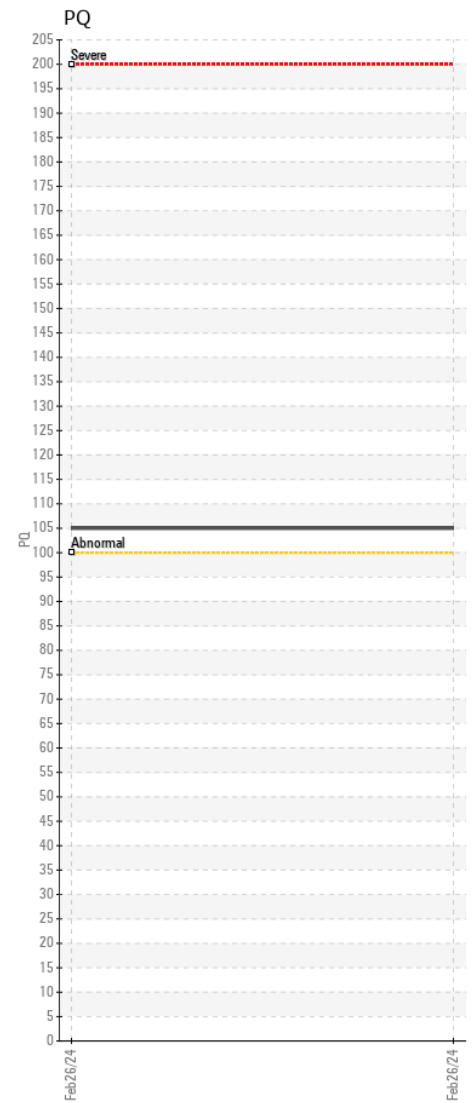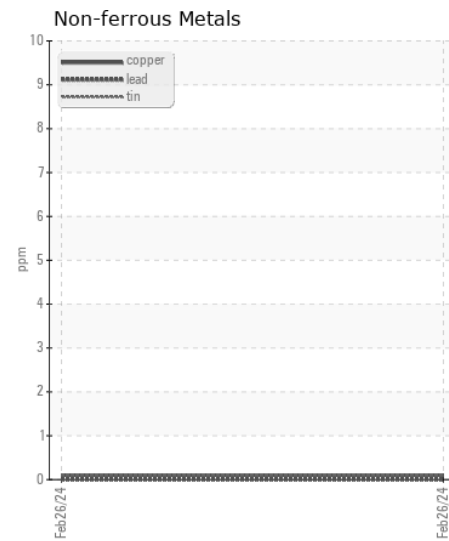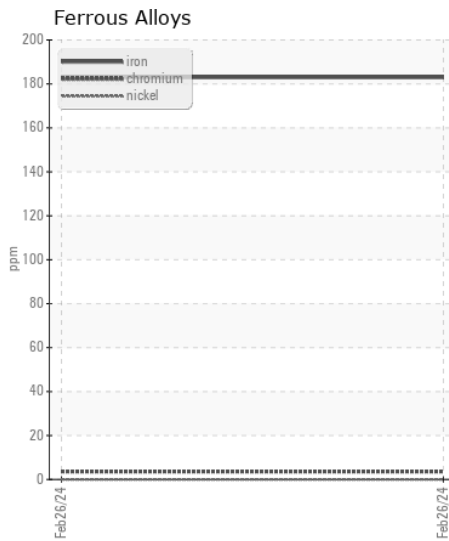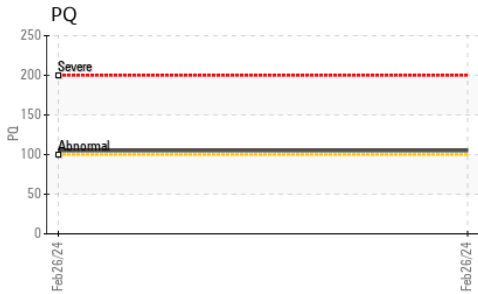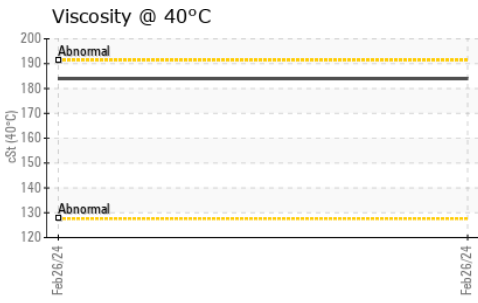

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0201267

**Lab Number** : 06103246

**Unique Number** : 10901476

**Test Package** : CONST ( Additional Tests: PQ )

**Received** : 28 Feb 2024

**Tested** : 01 Mar 2024

**Diagnosed** : 01 Mar 2024 - Don Baldrige

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - NEW BERN**

3816 MARTIN LUTHER KING BLVD

NEW BERN, NC

US 28562

Contact: Dylan Sanderson

dylan.sanderson@jamesriverequipment.com

T:

F: