



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[74848 LAKE CONWAY]
Machine Id
VOLVO L20H 1220189
Component
Front Axle
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP446888	VCP346609	---
Sample Date		Client Info		20 Feb 2024	02 Mar 2022	---
Machine Age	hrs	Client Info		3401	2089	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Changed	---
Filter Changed		Client Info		Not Changed	Not Changed	---
Sample Status				NORMAL	ATTENTION	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	166	362	---
Chromium	ppm	ASTM D5185m	>20	2	6	---
Nickel	ppm	ASTM D5185m	>10	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	<1	2	---
Lead	ppm	ASTM D5185m	>50	0	<1	---
Copper	ppm	ASTM D5185m	>120	1	3	---
Tin	ppm	ASTM D5185m	>20	0	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	6	13	---
Potassium	ppm	ASTM D5185m	>20	1	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	9	---
Boron	ppm	ASTM D5185m	111	133	117	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.9	4	<1	---
Manganese	ppm	ASTM D5185m	0.0	6	20	---
Magnesium	ppm	ASTM D5185m	39	19	5	---
Calcium	ppm	ASTM D5185m	93	469	3764	---
Phosphorus	ppm	ASTM D5185m	920	1104	1265	---
Zinc	ppm	ASTM D5185m	104	220	1623	---
Sulfur	ppm	ASTM D5185m	20179	30671	3619	---
Visc @ 40°C	cSt	ASTM D445	333	258	52.0	---

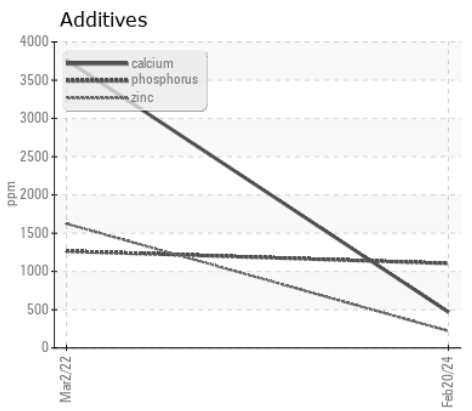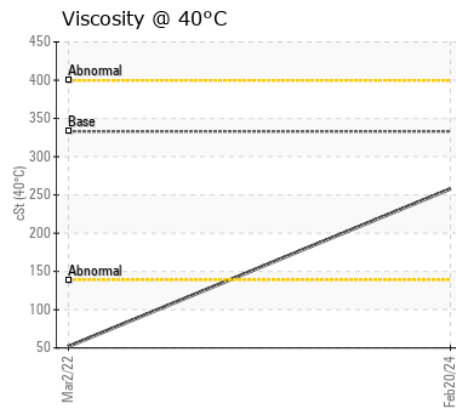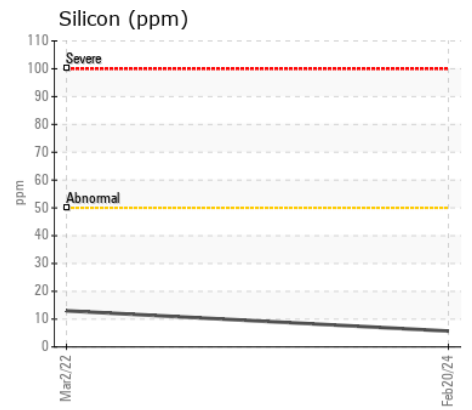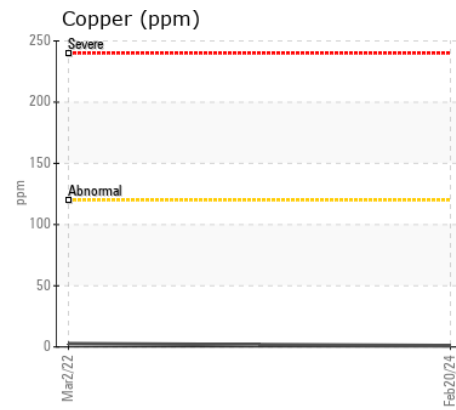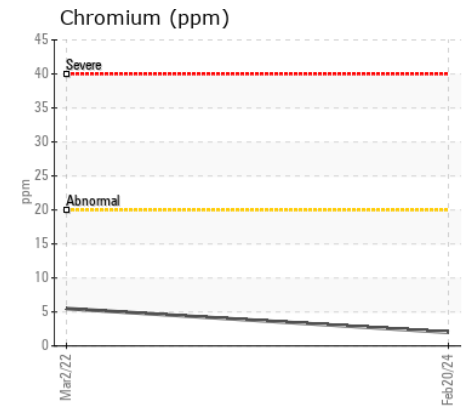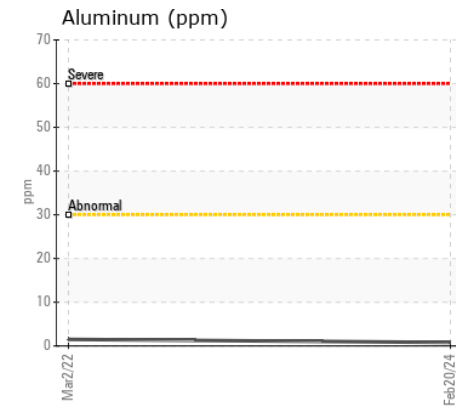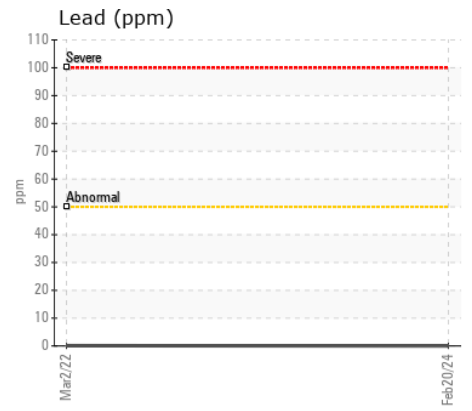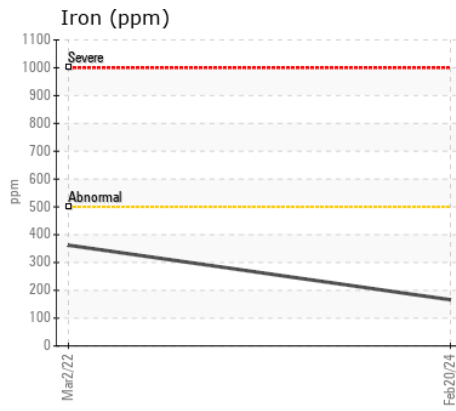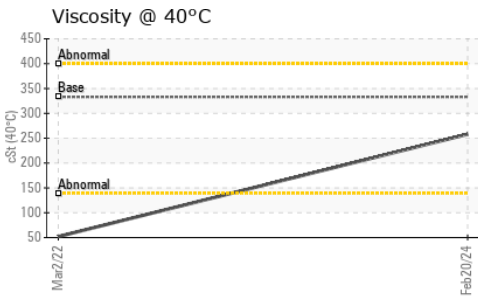

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP446888
Lab Number : 06103371
Unique Number : 10901601
Test Package : MOB 1

Received : 28 Feb 2024
Tested : 29 Feb 2024
Diagnosed : 29 Feb 2024 - Wes Davis

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: KENNY HANEY
 khaney@flaglerce.com
 T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)