



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[661511 PRIMORIS]
Machine Id
VOLVO A40G 352782
Component
Transmission (Auto)
Fluid
VOLVO AT 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP432043	VCP397265	VCP364346
Sample Date		Client Info		29 Jan 2024	17 Jan 2023	15 Aug 2022
Machine Age	hrs	Client Info		4045	2952	2306
Oil Age	hrs	Client Info		2000	1000	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	26	10	47
Chromium	ppm	ASTM D5185m	>5	<1	0	0
Nickel	ppm	ASTM D5185m	>5	2	<1	6
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	<1
Aluminum	ppm	ASTM D5185m	>50	14	5	27
Lead	ppm	ASTM D5185m	>50	0	0	<1
Copper	ppm	ASTM D5185m	>225	14	7	39
Tin	ppm	ASTM D5185m	>10	2	<1	6
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	7	5	14
Potassium	ppm	ASTM D5185m	>20	2	0	4
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	▲ MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	2	5
Boron	ppm	ASTM D5185m	187	89	102	58
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.0	<1	<1	<1
Manganese	ppm	ASTM D5185m	0.0	2	<1	5
Magnesium	ppm	ASTM D5185m	6.8	2	0	4
Calcium	ppm	ASTM D5185m	215	88	82	93
Phosphorus	ppm	ASTM D5185m	445	211	190	199
Zinc	ppm	ASTM D5185m	56	7	0	15
Sulfur	ppm	ASTM D5185m	1336	2357	2287	1895
Visc @ 40°C	cSt	ASTM D445	35.3	28.1	35.0	27.7

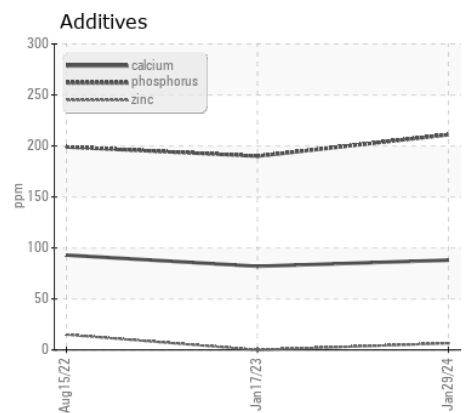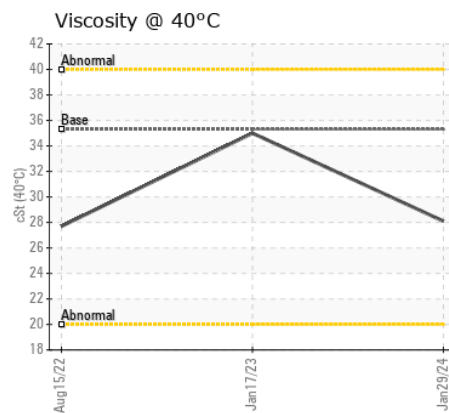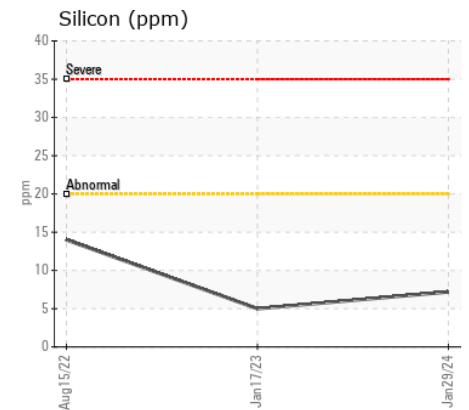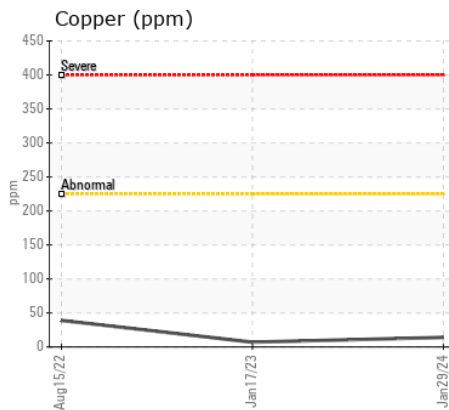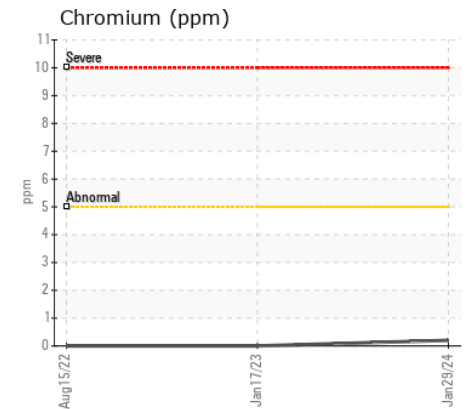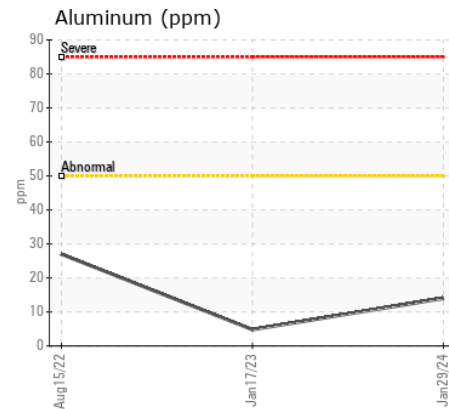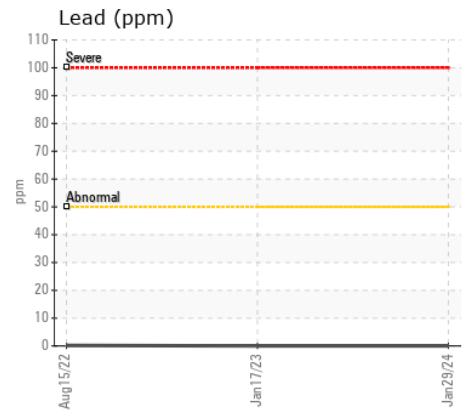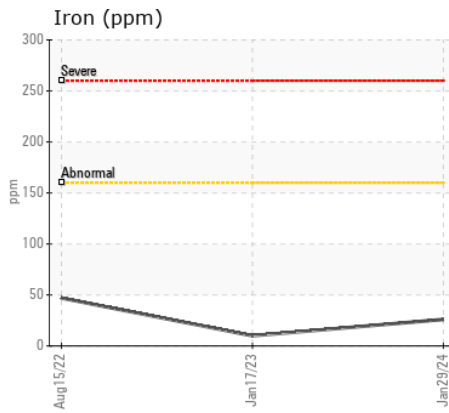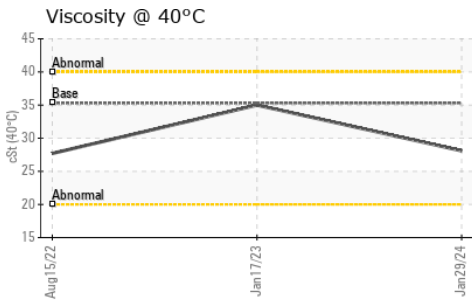

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP432043 **Received** : 28 Feb 2024
Lab Number : 06103401 **Tested** : 29 Feb 2024
Unique Number : 10901631 **Diagnosed** : 01 Mar 2024 - Sean Felton
Test Package : MOB 1

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: JOHN FARDELLA
 john.fardella@altg.com
 T: (813)630-0077
 F: (813)630-2233

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)