



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**427244 KENWORTH T880**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. ( Customer Sample Comment: Sampled only )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0110984</b>	GFL0061422	---
Sample Date		Client Info		<b>26 Feb 2024</b>	22 Jan 2024	---
Machine Age	hrs	Client Info		<b>17255</b>	16994	---
Oil Age	hrs	Client Info		<b>261</b>	600	---
Filter Age	hrs	Client Info		<b>261</b>	600	---
Oil Changed		Client Info		<b>Not Changd</b>	Changed	---
Filter Changed		Client Info		<b>Not Changd</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>12</b>	19	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>86</b>	89	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	3	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	3	---
Copper	ppm	ASTM D5185m	>330	<b>0</b>	<1	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	7	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.7	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.6</b>	9.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.4</b>	22.9	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>4</b>	7	---
Boron	ppm	ASTM D5185m	0	<b>109</b>	90	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	60	<b>2</b>	4	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	1010	<b>430</b>	415	---
Calcium	ppm	ASTM D5185m	1070	<b>1729</b>	1696	---
Phosphorus	ppm	ASTM D5185m	1150	<b>998</b>	934	---
Zinc	ppm	ASTM D5185m	1270	<b>1215</b>	1203	---
Sulfur	ppm	ASTM D5185m	2060	<b>3604</b>	3802	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.1</b>	17.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.4</b>	7.2	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.5</b>	15.0	---

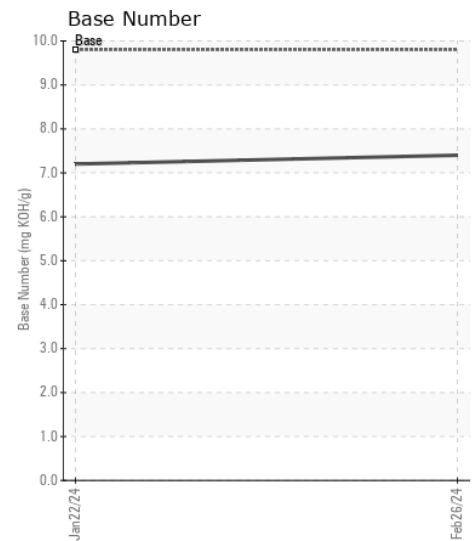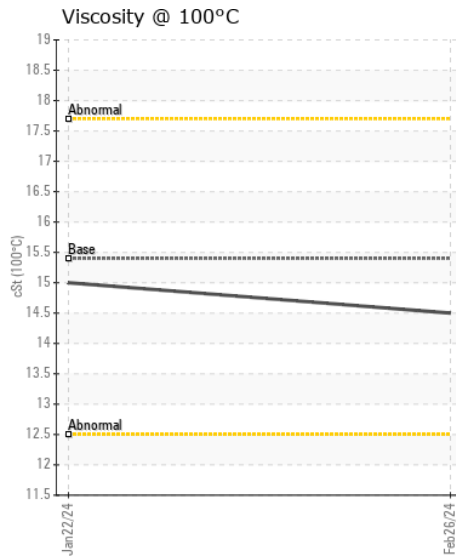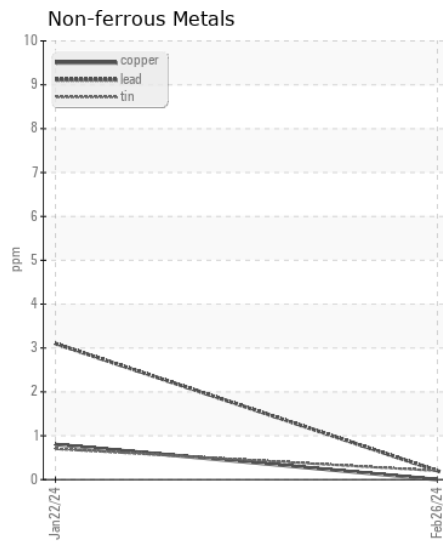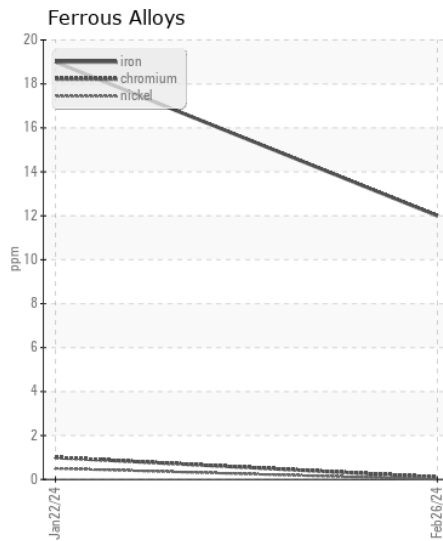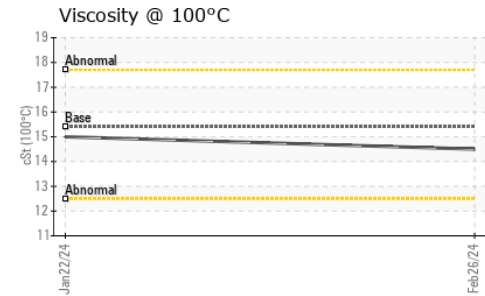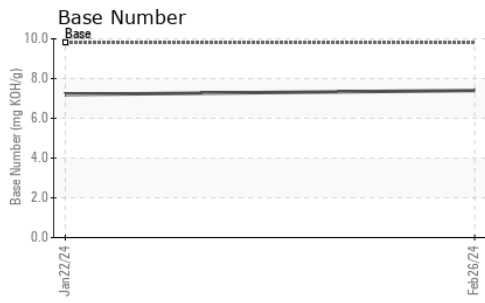

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110984  
**Lab Number** : 06103604  
**Unique Number** : 10901834  
**Test Package** : FLEET

**Received** : 28 Feb 2024  
**Tested** : 29 Feb 2024  
**Diagnosed** : 01 Mar 2024 - Don Baldrige

**GFL Environmental - 642B- MCM Disposal**  
 10450 Pease Ave  
 Byron Center, MI  
 US 49315  
 Contact: Joshua VanVolkinburg

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: