



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**LIEBHERR LR 1600/2 CR 6606 (S/N 074 509)**

Component  
**1 Swing Drive**

Fluid  
**GEAR OIL ISO 220 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0823345	---	---
Sample Date		Client Info		24 Feb 2024	---	---
Machine Age	hrs	Client Info		17237	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>400	5	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	<1	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>200	<1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	6	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	50	11	---	---
Barium	ppm	ASTM D5185m	15	1	---	---
Molybdenum	ppm	ASTM D5185m	15	33	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	50	<1	---	---
Calcium	ppm	ASTM D5185m	50	8	---	---
Phosphorus	ppm	ASTM D5185m	350	497	---	---
Zinc	ppm	ASTM D5185m	100	6	---	---
Sulfur	ppm	ASTM D5185m	12500	8210	---	---
Visc @ 40°C	cSt	ASTM D445	220	215	---	---

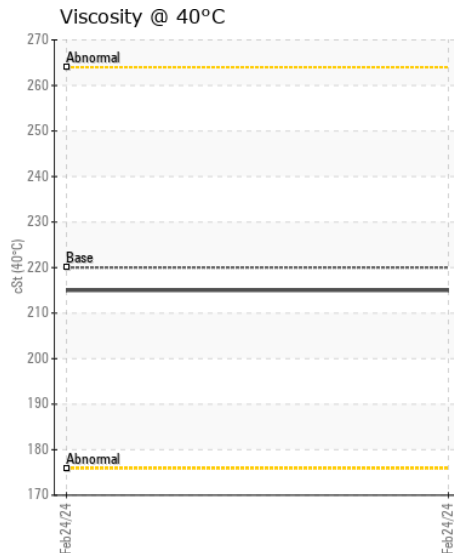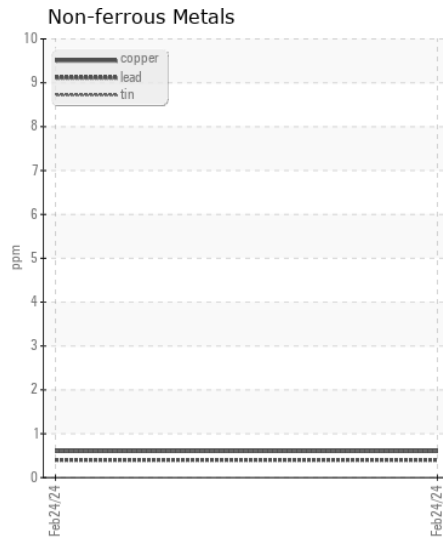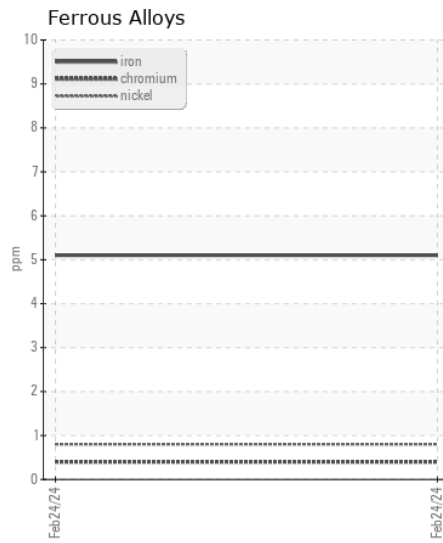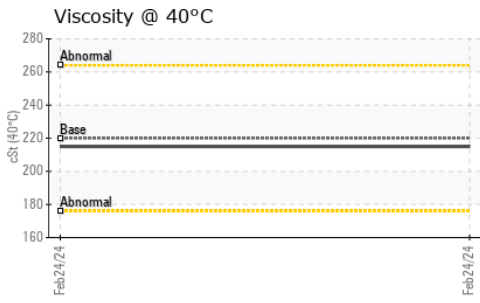

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : WC0823345

**Lab Number** : 06103856

**Unique Number** : 10902086

**Test Package** : CONST

**Received** : 28 Feb 2024

**Tested** : 29 Feb 2024

**Diagnosed** : 01 Mar 2024 - Don Baldrige

**BUCKNER HEAVY LIFT**

4732 NC 54 EAST

GRAHAM, NC

US 27253-9215

Contact: MICHAEL LAWSON

michaell@bucknercompanies.com

T: (336)376-8888

F: (336)376-4090

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)