



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**BOBCAT S595 SS37 (S/N B3NL17605)**  
 Component  
**Hydraulic System**  
 Fluid  
**DURALENE Trans-Flo UTF (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0035106</b>	---	---
Sample Date		Client Info		<b>14 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>1026</b>	---	---
Oil Age	hrs	Client Info		<b>1026</b>	---	---
Filter Age	hrs	Client Info		<b>1026</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>20	<b>32</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>10	<b>8</b>	---	---
Lead	ppm	ASTM D5185m	>10	<b>6</b>	---	---
Copper	ppm	ASTM D5185m	>75	<b>22</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>11</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>3</b>	---	---
Boron	ppm	ASTM D5185m		<b>35</b>	---	---
Barium	ppm	ASTM D5185m		<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>2</b>	---	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>19</b>	---	---
Calcium	ppm	ASTM D5185m		<b>1527</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>835</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1087</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>4031</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>42.0</b>	---	---

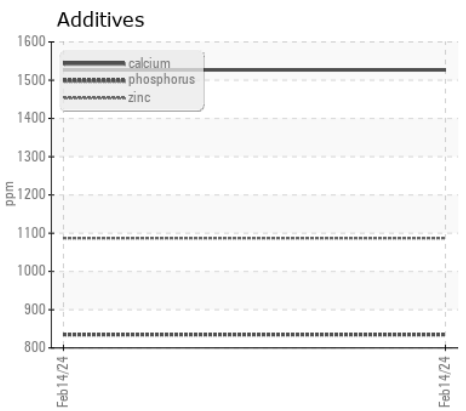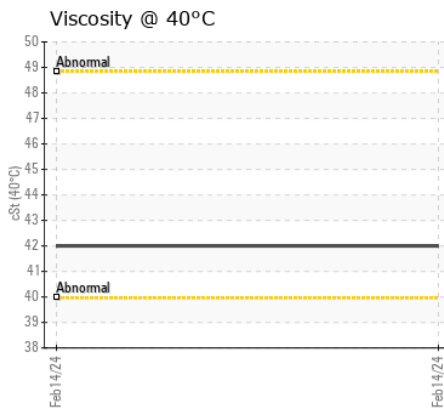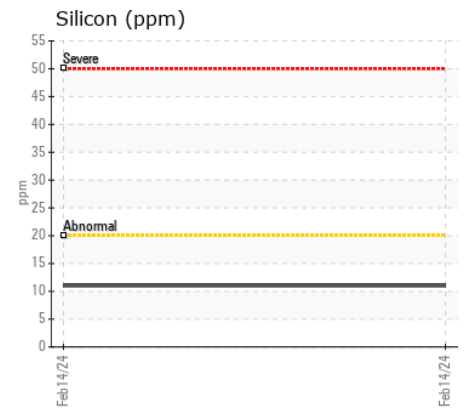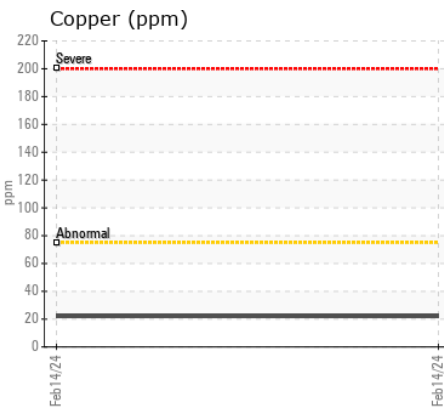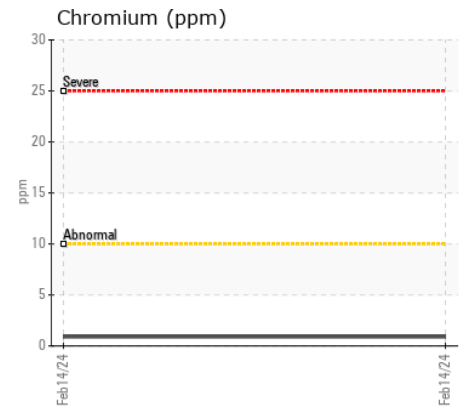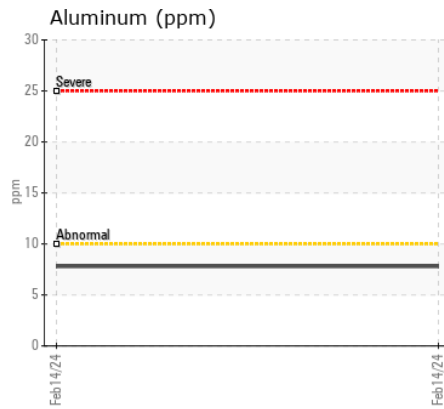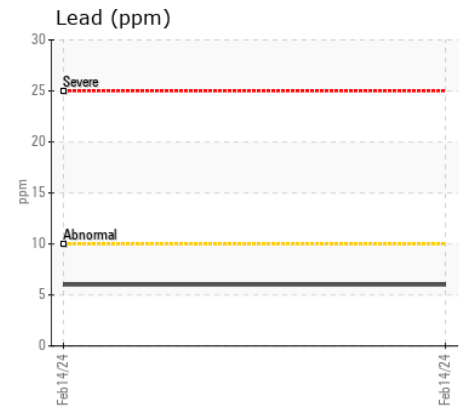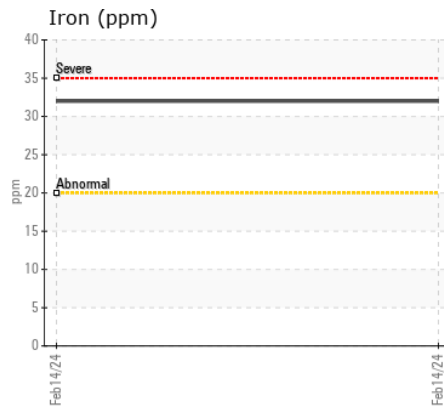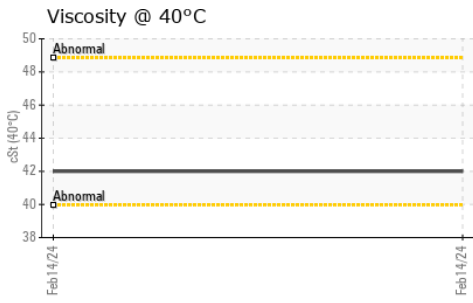

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0035106  
**Lab Number** : 06103961  
**Unique Number** : 10902191  
**Test Package** : MOB 1

**Received** : 28 Feb 2024  
**Tested** : 29 Feb 2024  
**Diagnosed** : 01 Mar 2024 - Don Baldrige

**ROSS CONTRACTING INC.**  
 1007 RISING RIDGE ROAD  
 MOUNT AIRY, MD  
 US 21771

Contact: JONATHAN KUENTZ  
 jonathank@rosscontracting.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (301)831-5500  
 F: (301)831-5900