



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area

Mobile Fleet

Machine Id

6403 6403

Component

Transmission (Auto)

Fluid

MOBIL DELVAC SYNTHETIC ATF (8 GAL)

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0902847	WC0808763	WC0740780
Sample Date		Client Info		27 Feb 2024	20 Jul 2023	06 Oct 2022
Machine Age	hrs	Client Info		10476	9631	8367
Oil Age	hrs	Client Info		2109	1263	4140
Filter Age	hrs	Client Info		2109	1263	1922
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		Changed	Not Changd	Changed
Sample Status				ABNORMAL	ABNORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>300	84	59	58
Chromium	ppm	ASTM D5185m	>2	<1	<1	0
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>70	62	37	33
Lead	ppm	ASTM D5185m	>85	5	3	2
Copper	ppm	ASTM D5185m	>90	12	10	11
Tin	ppm	ASTM D5185m	>10	2	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

Silicon	ppm	ASTM D5185m	>20	9	6	2
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>10000	▲ 27470	▲ 22620	● 14598
Particles >6µm		ASTM D7647	>2500	● 4797	● 3715	1459
Particles >14µm		ASTM D7647	>320	116	86	50
Particles >21µm		ASTM D7647	>80	23	7	6
Particles >38µm		ASTM D7647	>20	0	0	1
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	▲ 22/19/14	▲ 22/19/14	● 21/18/13
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	1	2
Boron	ppm	ASTM D5185m		130	142	152
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		4	3	0
Calcium	ppm	ASTM D5185m		42	46	45
Phosphorus	ppm	ASTM D5185m		313	289	295
Zinc	ppm	ASTM D5185m		9	9	0
Sulfur	ppm	ASTM D5185m		1818	1293	1345
Visc @ 40°C	cSt	ASTM D445	39	41.8	36.0	35.6

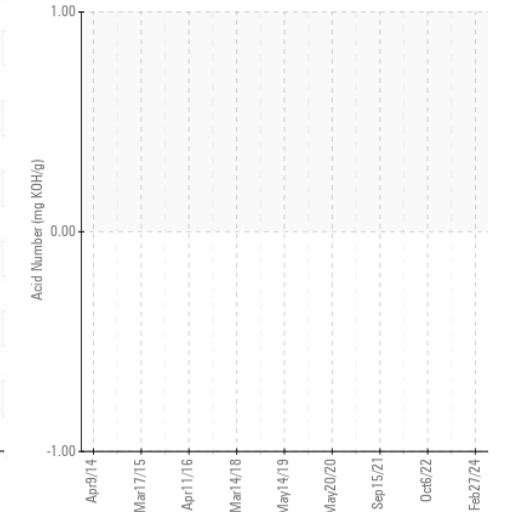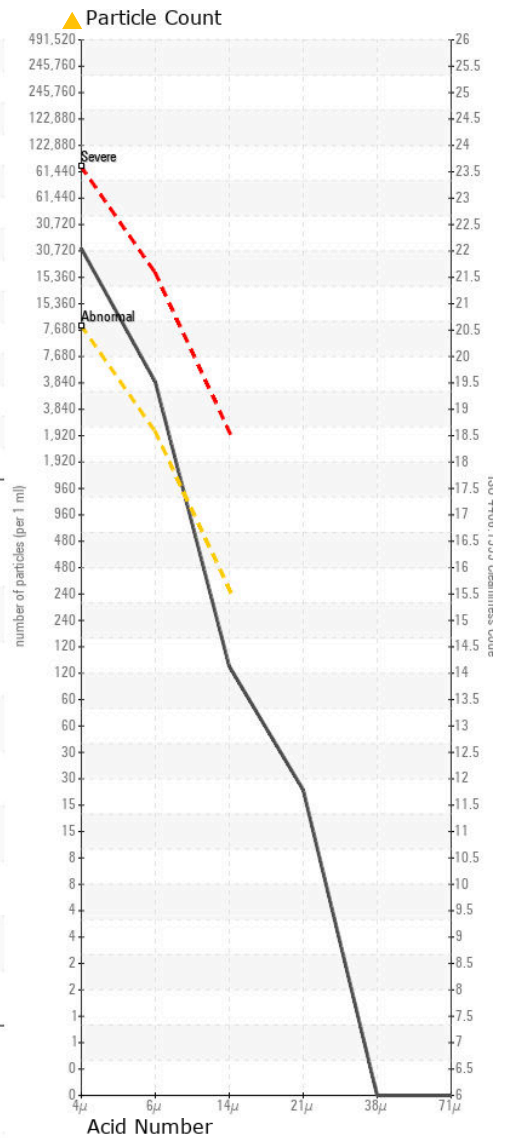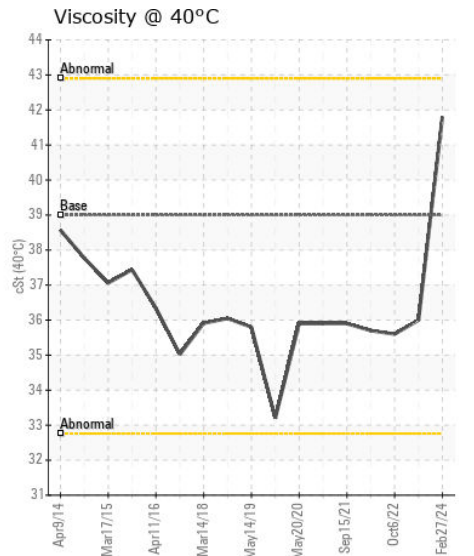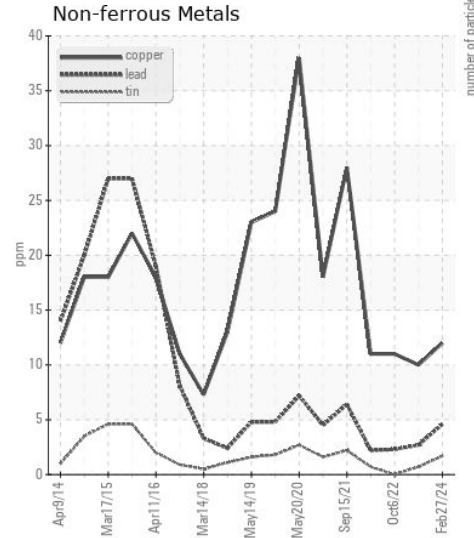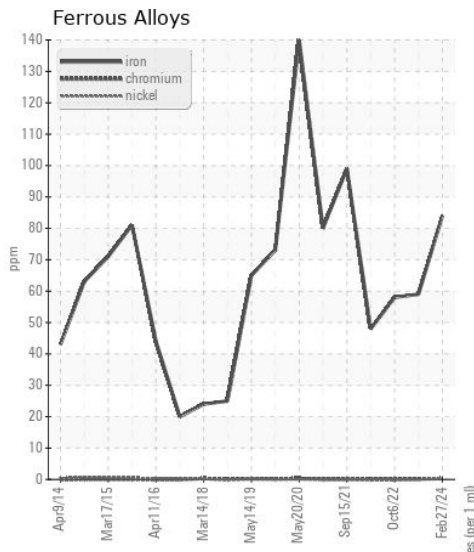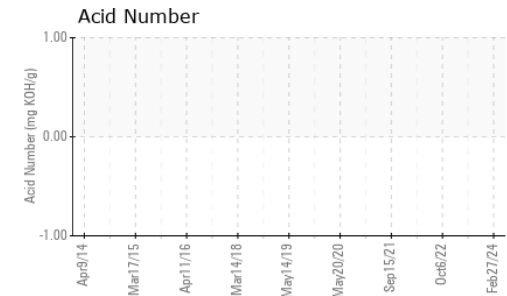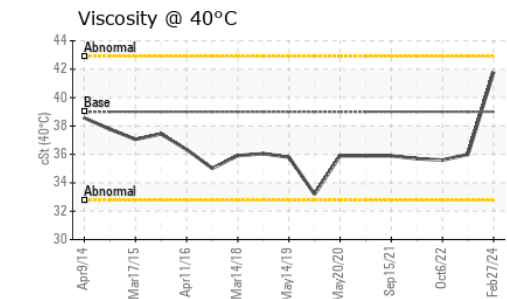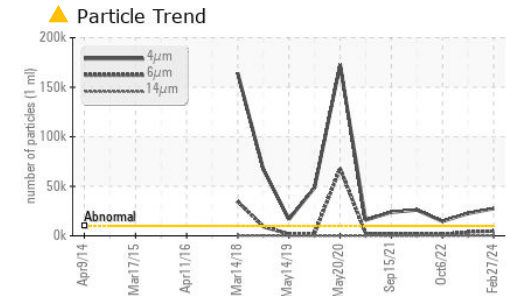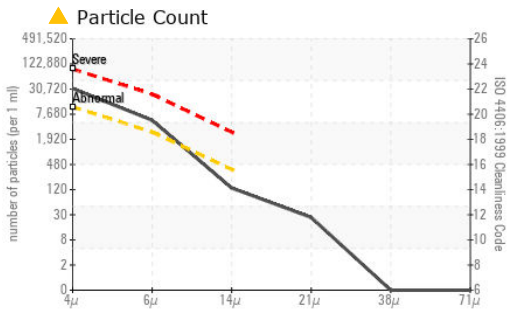

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0902847 **Received** : 29 Feb 2024
Lab Number : 06104228 **Tested** : 02 Mar 2024
Unique Number : 10902458 **Diagnosed** : 02 Mar 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PrtCount)

CAROLINA SUNROCK
 PO BOX 25
 BUTNER, NC
 US 27509
 Contact: Leigh Dennis
 rdennis@thesunrockgroup.com
 T: (919)575-4505
 F: (919)575-0162

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)