



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area  
**Ascendum Machinery**  
Machine Id  
**VOLVO L60G 611032**  
Component  
**Front Axle**  
Fluid  
**VOLVO WB 102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0003379	---	---
Sample Date		Client Info		27 Feb 2024	---	---
Machine Age	hrs	Client Info		6416	---	---
Oil Age	hrs	Client Info		2000	---	---
Filter Age	hrs	Client Info		2000	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		None	---	---
Sample Status				NORMAL	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	185	---	---
Chromium	ppm	ASTM D5185m	>20	4	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		2	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	1	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>120	2	---	---
Tin	ppm	ASTM D5185m	>20	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	17	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m		123	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		3	---	---
Manganese	ppm	ASTM D5185m		5	---	---
Magnesium	ppm	ASTM D5185m		22	---	---
Calcium	ppm	ASTM D5185m		3709	---	---
Phosphorus	ppm	ASTM D5185m		1295	---	---
Zinc	ppm	ASTM D5185m		1585	---	---
Sulfur	ppm	ASTM D5185m		2992	---	---
Visc @ 40°C	cSt	ASTM D445	55	40.3	---	---

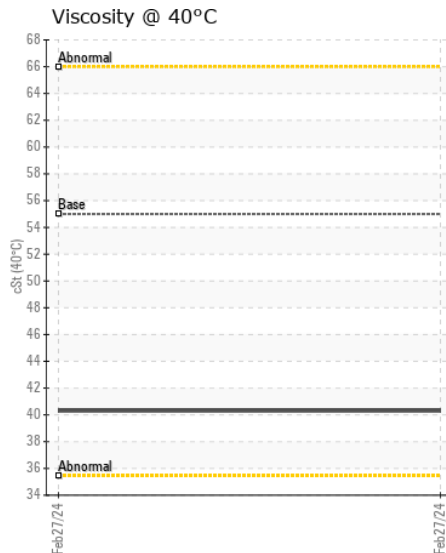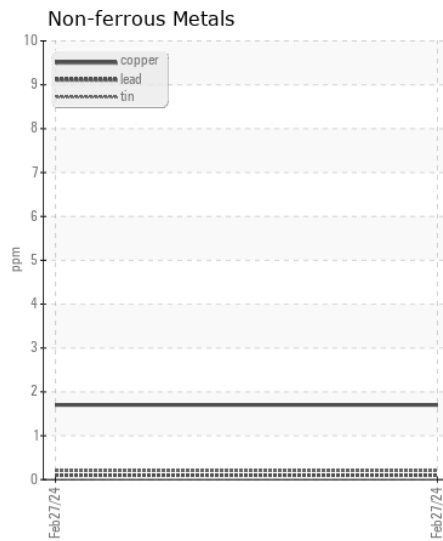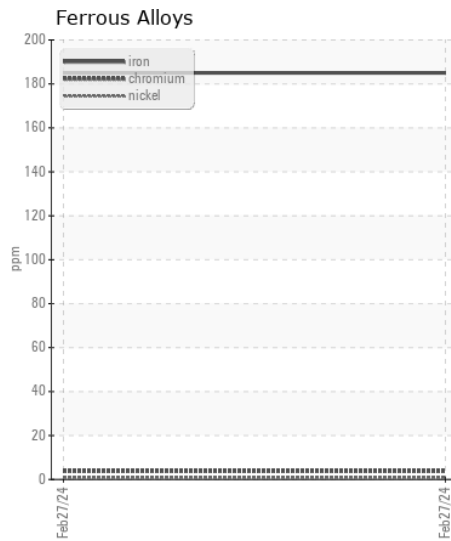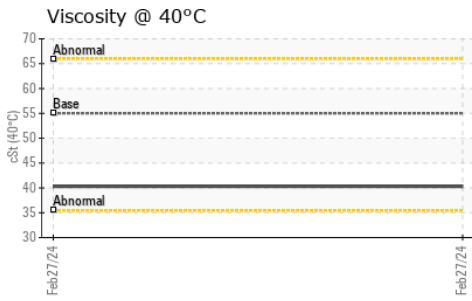

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0003379  
**Lab Number** : 06104670  
**Unique Number** : 10902900  
**Test Package** : CONST

**Received** : 29 Feb 2024  
**Tested** : 01 Mar 2024  
**Diagnosed** : 01 Mar 2024 - Wes Davis

**160 - ASCENDUM MACHINERY INC - MILLS RIVER**  
 215 FANNING FIELDS RD  
 MILLS RIVER, NC  
 US 28759  
 Contact: CORY PENLAND  
 cory.penland@ascendummachinery.com  
 T: (828)687-0620  
 F: (828)687-0622

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)