



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	ABNORMAL

Machine Id
THOMAS 1616
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

WEAR

All component wear rates are normal.

CONTAMINATION

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

FLUID CONDITION












The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0906137	WC0821276	WC04942725
Sample Date		Client Info		26 Feb 2024	31 May 2023	25 Mar 2020
Machine Age	mls	Client Info		154260	139965	0
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Filter Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				SEVERE	NORMAL	ABNORMAL

Iron	ppm	ASTM D5185m	>100	13	32	▲ 107
Chromium	ppm	ASTM D5185m	>20	<1	2	2
Nickel	ppm	ASTM D5185m	>4	<1	<1	1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	8	7	▲ 20
Lead	ppm	ASTM D5185m	>40	0	0	4
Copper	ppm	ASTM D5185m	>330	<1	2	82
Tin	ppm	ASTM D5185m	>15	0	0	6
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>25	6	15	▲ 44
Potassium	ppm	ASTM D5185m	>20	3	3	● 91
Fuel	%	ASTM D3524	>5	▲ 9.6	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	0.0
Soot %	%	*ASTM D7844	>3	0.4	0.6	0.8
Nitration	Abs/cm	*ASTM D7624	>20	9.4	12.1	13.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.2	23.0	27.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m	>158	2	3	7
Boron	ppm	ASTM D5185m	250	39	32	21
Barium	ppm	ASTM D5185m	10	0	0	7
Molybdenum	ppm	ASTM D5185m	100	82	79	47
Manganese	ppm	ASTM D5185m		0	<1	6
Magnesium	ppm	ASTM D5185m	450	102	45	560
Calcium	ppm	ASTM D5185m	3000	1898	2203	1550
Phosphorus	ppm	ASTM D5185m	1150	972	912	853
Zinc	ppm	ASTM D5185m	1350	1167	1105	1085
Sulfur	ppm	ASTM D5185m	4250	3703	4042	2193
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.5	20.3	27.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.4	6.0	5.8
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 11.2	12.9	12.8

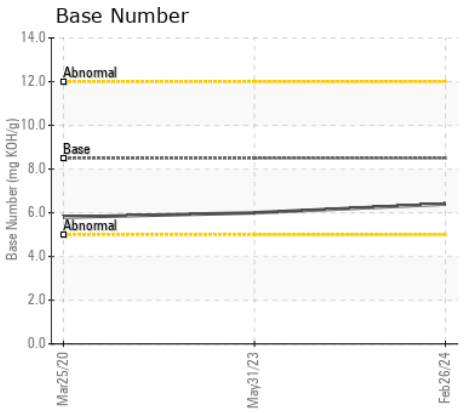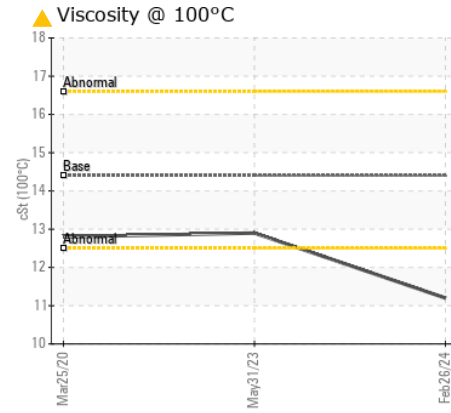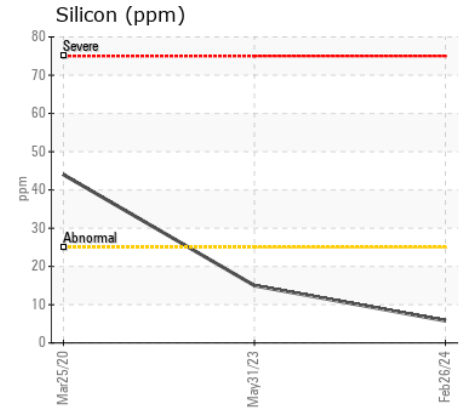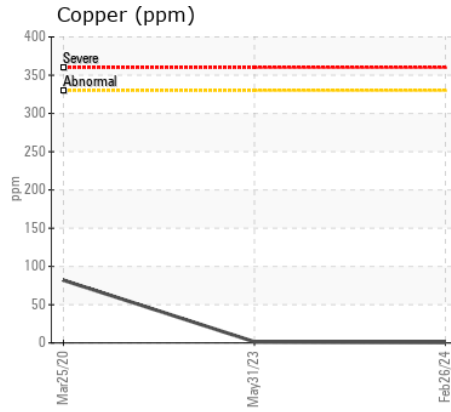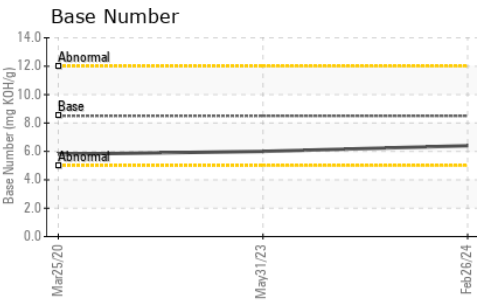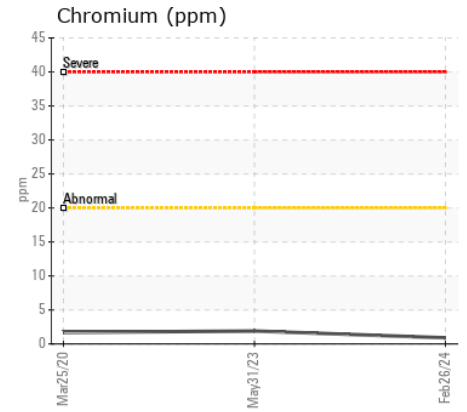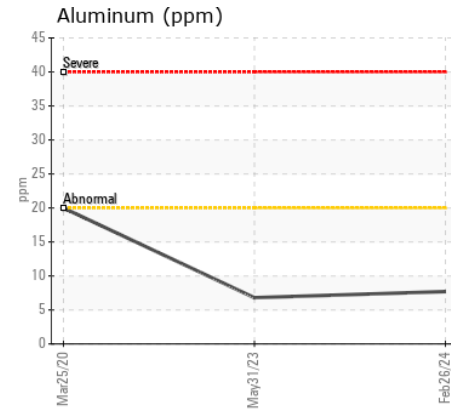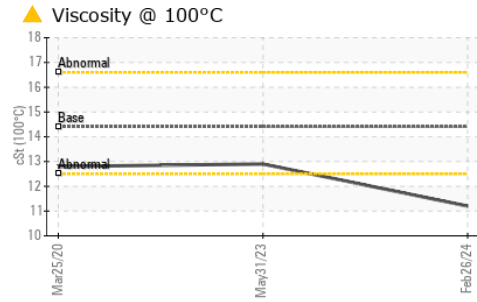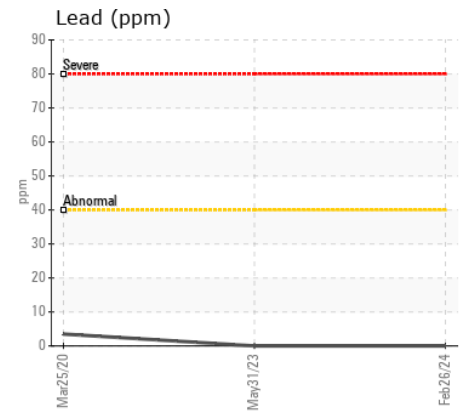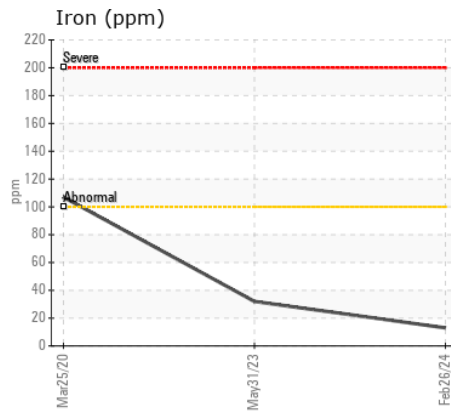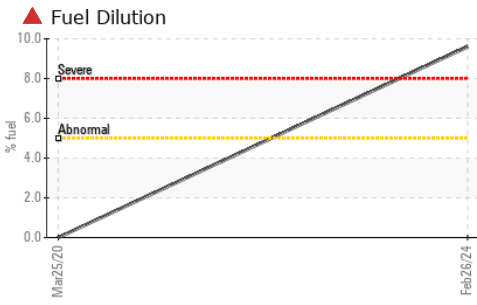

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0906137 **Received** : 29 Feb 2024
Lab Number : 06104853 **Tested** : 04 Mar 2024
Unique Number : 10903083 **Diagnosed** : 04 Mar 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

WAKE COUNTY PUBLIC SCHOOL SYSTEM
 1551 ROCK QUARRY ROAD
 RALEIGH, NC
 US 27610
 Contact: DEVIN WEBER
 dweber@wcpss.net
 T: (919)856-8076
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)