



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Ascendum Machinery
Machine Id
VOLVO EC200EL 310063
Component
Diesel Engine
Fluid
VOLVO VDS-4.5 Premium Motor Oil 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0007642	ASC0005345	ASC0000091
Sample Date		Client Info		27 Feb 2024	24 Oct 2023	14 Aug 2023
Machine Age	hrs	Client Info		5427	5030	4517
Oil Age	hrs	Client Info		397	513	647
Filter Age	hrs	Client Info		0	0	647
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	13	12	54
Chromium	ppm	ASTM D5185m	>10	<1	<1	2
Nickel	ppm	ASTM D5185m	>10	<1	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	4	4	▲ 15
Lead	ppm	ASTM D5185m	>20	<1	<1	<1
Copper	ppm	ASTM D5185m	>15	2	2	6
Tin	ppm	ASTM D5185m	>10	<1	<1	2
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	11	11	17
Potassium	ppm	ASTM D5185m	>20	0	<1	1
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.7
Nitration	Abs/cm	*ASTM D7624	>20	7.3	7.6	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.6	22.2	21.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	2
Boron	ppm	ASTM D5185m		37	24	4
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		39	40	66
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m		529	514	889
Calcium	ppm	ASTM D5185m		1850	1564	1344
Phosphorus	ppm	ASTM D5185m		1036	894	1024
Zinc	ppm	ASTM D5185m		1224	1080	1341
Sulfur	ppm	ASTM D5185m		3614	2644	3709
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.4	20.5	17.9
Base Number (BN)	mg KOH/g	ASTM D2896		10.5	10.6	7.6
Visc @ 100°C	cSt	ASTM D445		13.25	13.1	13.2

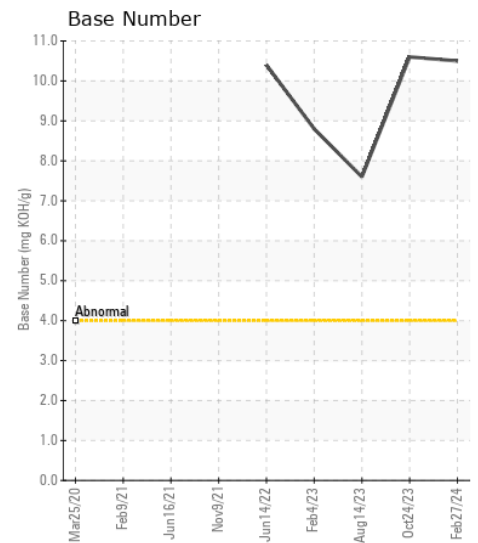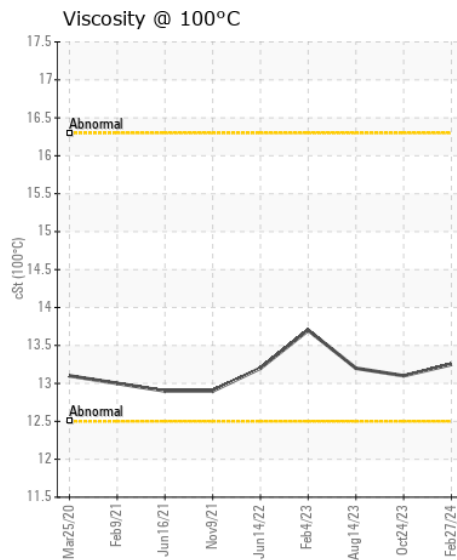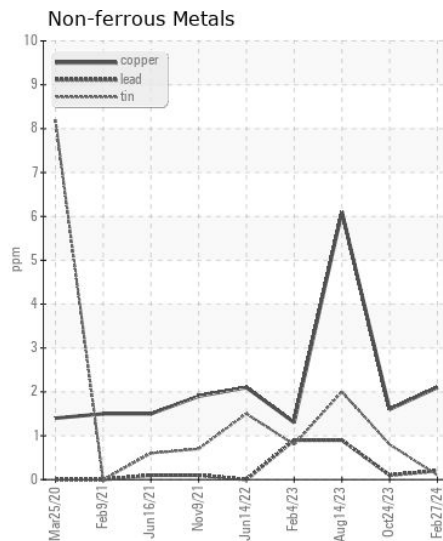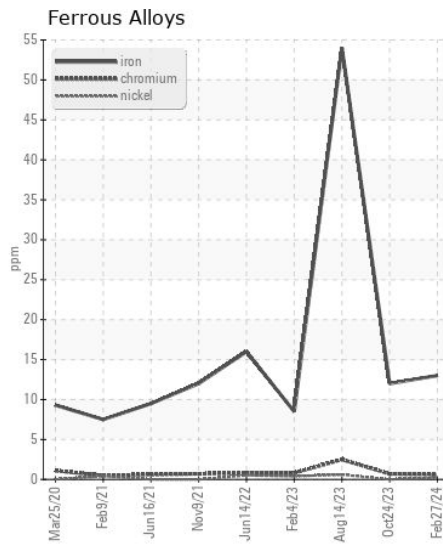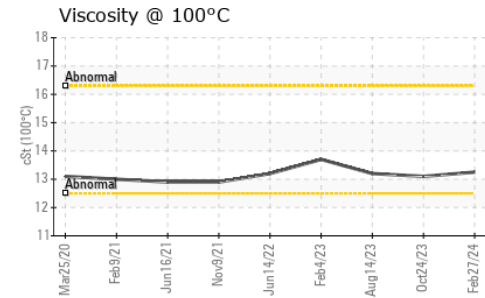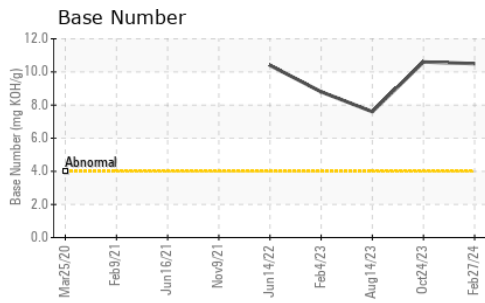

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0007642 **Received** : 29 Feb 2024
Lab Number : 06105626 **Tested** : 05 Mar 2024
Unique Number : 10903856 **Diagnosed** : 05 Mar 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

EGGER TIMBERPAK
 1801 COTTONWOOD ST
 CHARLOTTE, NC
 US 28206
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: