



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**MATTEI 092532-2017**  
 Component  
**Compressor**  
 Fluid  
**ROTOROIL 8000 (1 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

**WEAR**

All component wear rates are normal.








**CONTAMINATION**

The water content is negligible. There is no indication of any contamination in the oil.

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>AN37031</b>	AN37401	AN25241
Sample Date		Client Info		<b>23 Feb 2024</b>	08 Nov 2023	23 Jun 2023
Machine Age	hrs	Client Info		<b>18195</b>	17450	16296
Oil Age	hrs	Client Info		<b>745</b>	1154	3097
Filter Age	hrs	Client Info		<b>745</b>	1154	3097
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL
Iron	ppm	ASTM D5185m	>50	<b>10</b>	<1	<1
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m		<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	▲ 21	<1
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>0</b>	2	0
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	12	<1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	0
Water	%	ASTM D6304	>0.1	<b>0.061</b>	0.027	0.074
ppm Water	ppm	ASTM D6304	>1000	<b>615</b>	276.4	741.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG
Sodium	ppm	ASTM D5185m		<b>2</b>	2	4
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	6	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>0</b>	<1	2
Calcium	ppm	ASTM D5185m		<b>2</b>	5	<1
Phosphorus	ppm	ASTM D5185m	884	<b>947</b>	1049	863
Zinc	ppm	ASTM D5185m		<b>14</b>	113	29
Sulfur	ppm	ASTM D5185m		<b>177</b>	0	140
Acid Number (AN)	mg KOH/g	ASTM D8045	0.1	<b>0.18</b>	0.46	0.35
Visc @ 40°C	cSt	ASTM D445	87.69	<b>63.5</b>	66.5	63.0

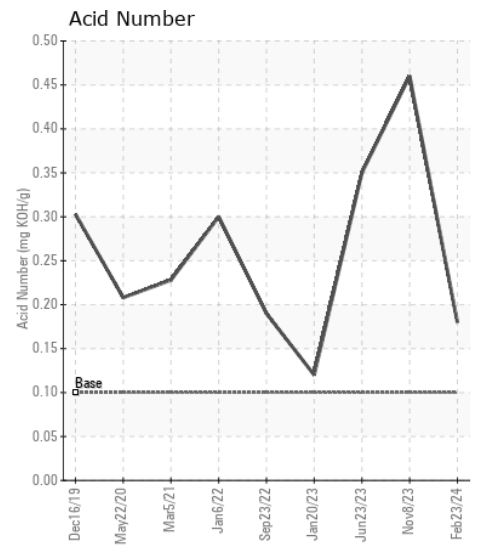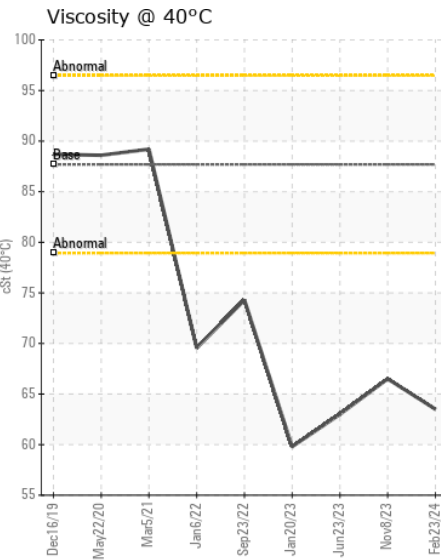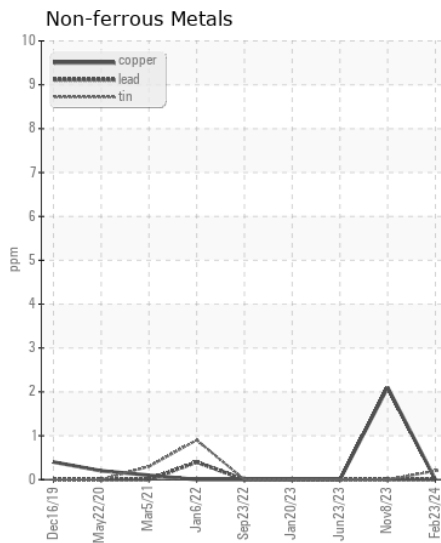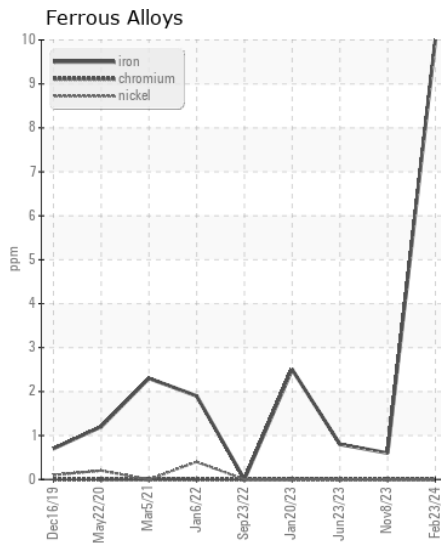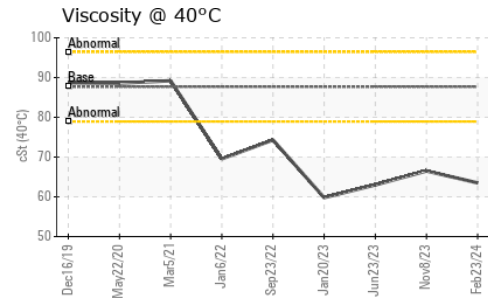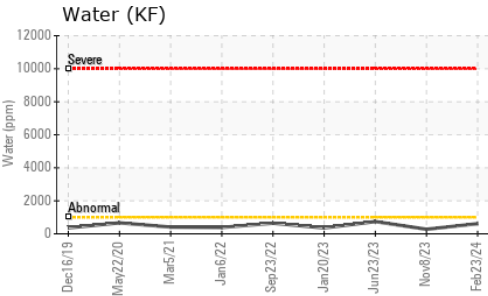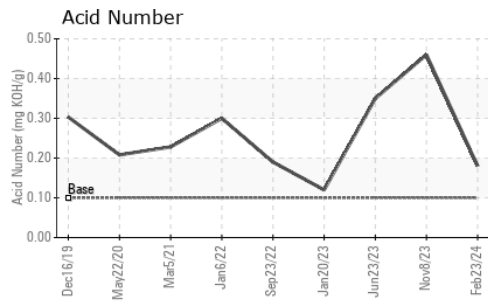

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : AN37031  
**Lab Number** : 06106225  
**Unique Number** : 10909722  
**Test Package** : IND 2  
**Received** : 01 Mar 2024  
**Tested** : 06 Mar 2024  
**Diagnosed** : 06 Mar 2024 - Jonathan Hester

**MATTEI COMPRESSORS--OEM**  
 9635 LIBERTY ROAD, SUITE E  
 RANDALLSTOWN, MD  
 US 21133  
 Contact: MARTY WARD  
 jward@matteicomp.com  
 T: (410)521-7020  
 F: (410)521-7024

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)