



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[PERRY ENGINEERING]
 Machine Id
JOHN DEERE 1T0700LXJNF433071
 Component
Left Final Drive
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0194896	JR0170074	JR0159644
Sample Date		Client Info		28 Feb 2024	12 Jul 2023	20 Feb 2023
Machine Age	hrs	Client Info		1521	1013	484
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	63	74	126
Iron	ppm	ASTM D5185m	>750	46	126	110
Chromium	ppm	ASTM D5185m	>9	<1	3	2
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	3	7	5
Lead	ppm	ASTM D5185m	>15	0	<1	1
Copper	ppm	ASTM D5185m	>40	0	<1	0
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	MODER	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	10	22	16
Potassium	ppm	ASTM D5185m	>20	<1	5	2
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	2	0	2
Boron	ppm	ASTM D5185m	6	14	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	11	1	<1
Manganese	ppm	ASTM D5185m		1	4	4
Magnesium	ppm	ASTM D5185m	145	132	95	108
Calcium	ppm	ASTM D5185m	3570	3032	3659	3702
Phosphorus	ppm	ASTM D5185m	1290	998	1017	1012
Zinc	ppm	ASTM D5185m	1640	1166	1190	1257
Sulfur	ppm	ASTM D5185m		3396	3543	4032
Visc @ 40°C	cSt	ASTM D445	57.0	52.8	51.0	52.0

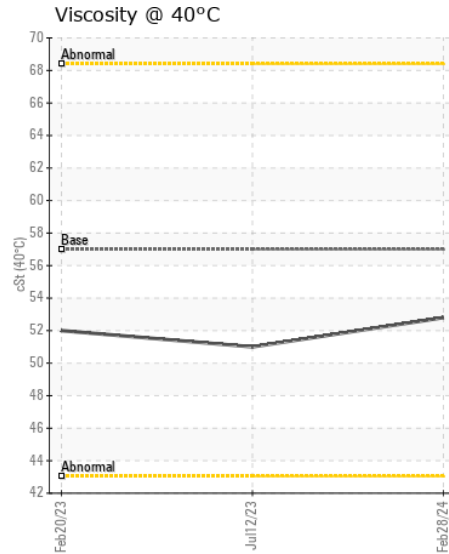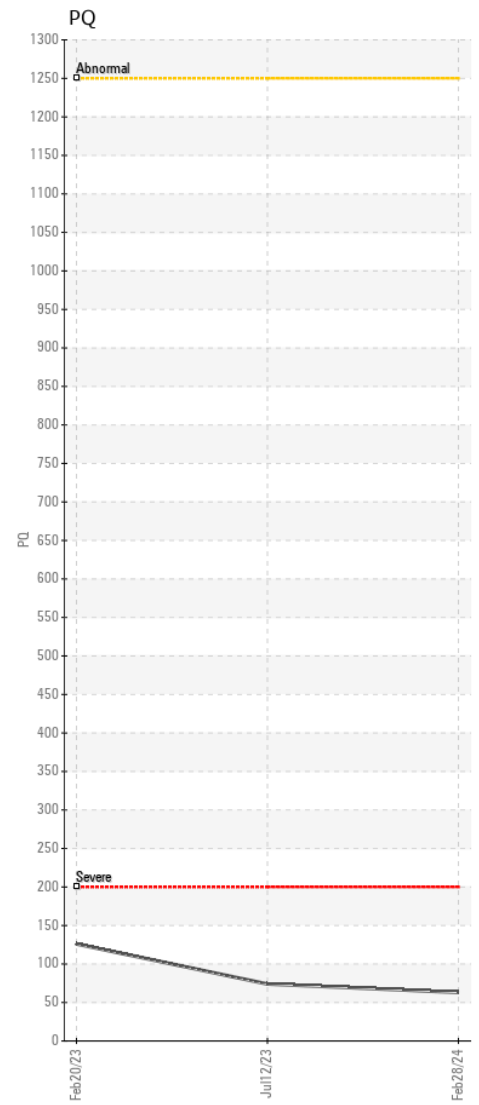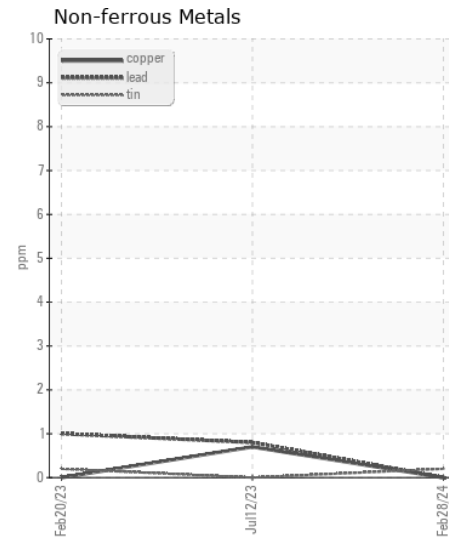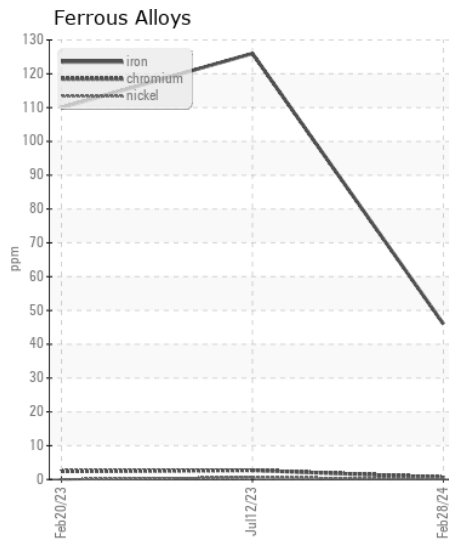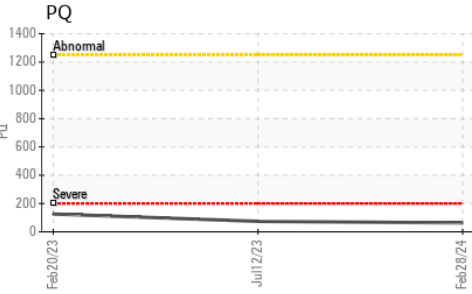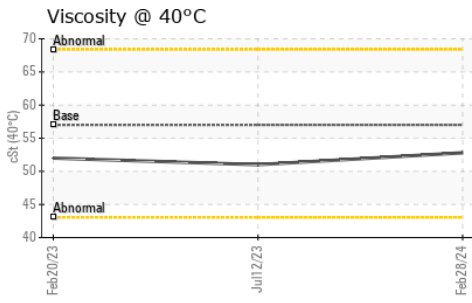

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0194896 **Received** : 01 Mar 2024
Lab Number : 06106419 **Tested** : 04 Mar 2024
Unique Number : 10909916 **Diagnosed** : 04 Mar 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

PERRY ENGINEERING CO
 1945 MILLWOOD AVE
 WINCHESTER, VA
 US 22602
 Contact: T SHILEY
 tshiley@perryeng.com
 T: (540)974-3100
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)