



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[SPM675617 MCIRON]
 Machine Id
VOLVO A45GFS 353666
 Component
Rear Axle
 Fluid
GEAR OIL SAE 75W80 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP304829	---	---
Sample Date		Client Info		09 Mar 2024	---	---
Machine Age	hrs	Client Info		1075	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	235	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	0	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>150	0	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	2	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	400	252	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	5	---	---
Manganese	ppm	ASTM D5185m		8	---	---
Magnesium	ppm	ASTM D5185m	12	0	---	---
Calcium	ppm	ASTM D5185m	150	94	---	---
Phosphorus	ppm	ASTM D5185m	1650	2008	---	---
Zinc	ppm	ASTM D5185m	125	43	---	---
Sulfur	ppm	ASTM D5185m	22500	28607	---	---
Visc @ 40°C	cSt	ASTM D445	48	52.8	---	---

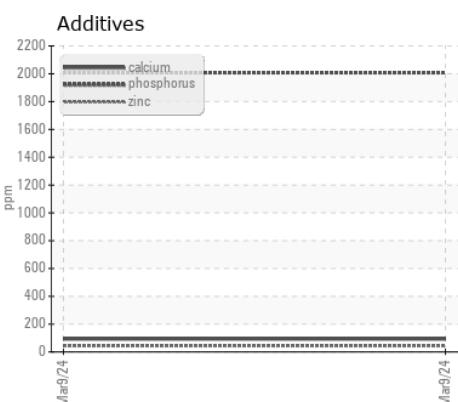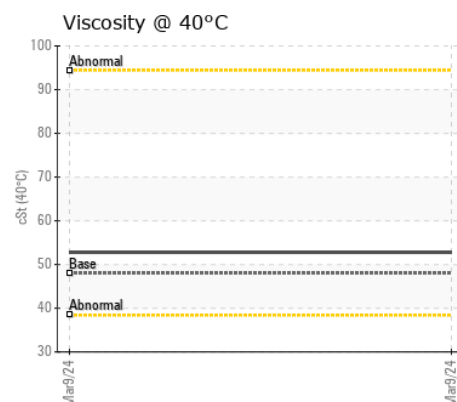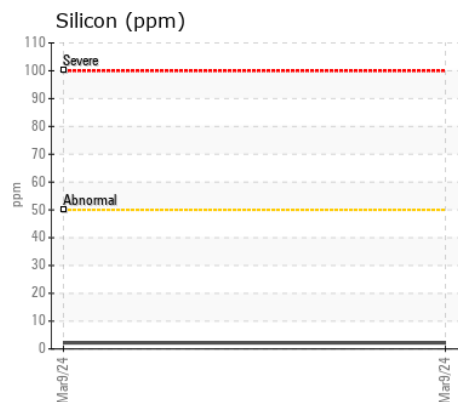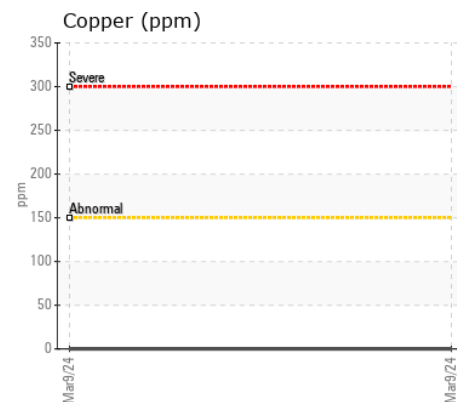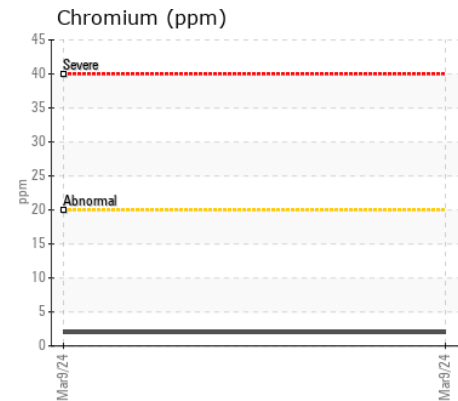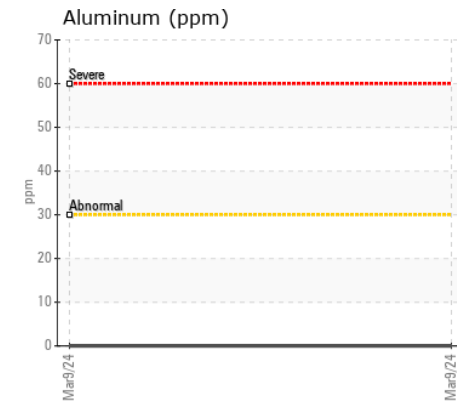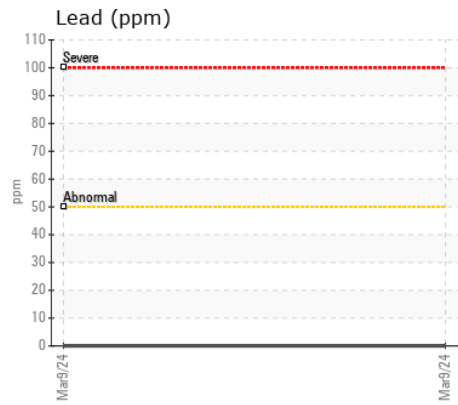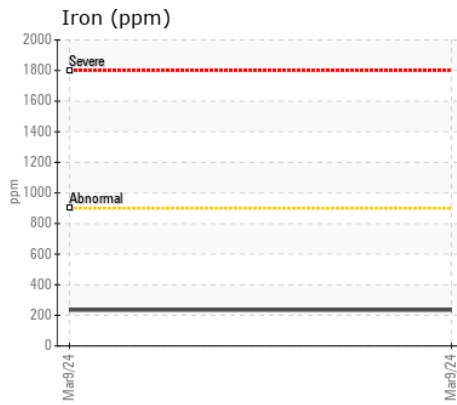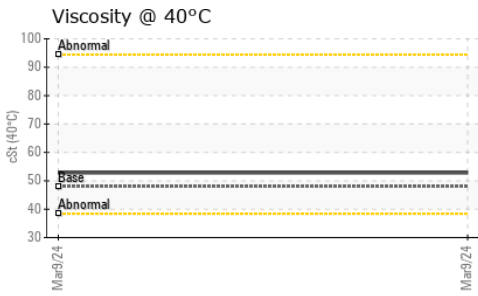

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP304829
Lab Number : 06121206
Unique Number : 10930039
Test Package : MOB 1
Received : 18 Mar 2024
Tested : 19 Mar 2024
Diagnosed : 19 Mar 2024 - Wes Davis

ALTA CONSTRUCTION EQUIPMENT
 613 E STEVENSON RD
 OTTAWA, IL
 US 61350
 Contact: KEVIN SKRTICH
 KEVIN.SKRTICH@ALTAEQUIPMENT.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: