



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
KEMP QUARRIES / PRYOR STONE [68434]
Machine Id
OHT085
Component
Transmission (Manual)
Fluid
PETRO CANADA PRODURO TO-4 SAE 30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Pm1 performed. All oil samples taken. Engine oil, engine oil filters, fuel, air, and cabin air filters changed.)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0086336	PCA0084313	PCA0084600
Sample Date		Client Info		19 Feb 2024	03 Nov 2023	24 Jul 2023
Machine Age	hrs	Client Info		14934	14433	13895
Oil Age	hrs	Client Info		501	990	13895
Filter Age	hrs	Client Info		0	538	0
Oil Changed		Client Info		Oil Added	Changed	N/A
Filter Changed		Client Info		None	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	3	<1	2
Chromium	ppm	ASTM D5185m	>5	<1	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>7	0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	<1	0
Lead	ppm	ASTM D5185m	>45	1	2	1
Copper	ppm	ASTM D5185m	>225	3	4	2
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	6	6	6
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	1	<1
Boron	ppm	ASTM D5185m	2	2	<1	<1
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	2	<1	2
Manganese	ppm	ASTM D5185m	9	0	0	0
Magnesium	ppm	ASTM D5185m	1	20	18	16
Calcium	ppm	ASTM D5185m	3131	3209	3051	3289
Phosphorus	ppm	ASTM D5185m	1194	925	869	909
Zinc	ppm	ASTM D5185m	1281	1118	1045	1079
Sulfur	ppm	ASTM D5185m	3811	3709	3372	3906
Visc @ 40°C	cSt	ASTM D445	88.5	86.0	84.6	85.8

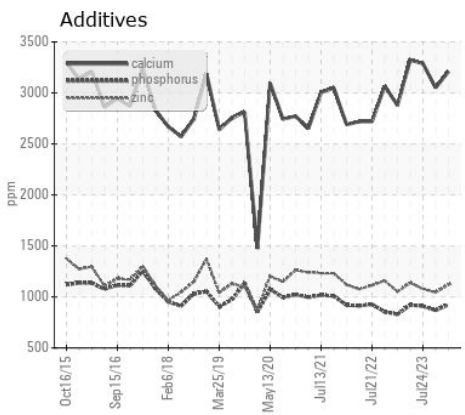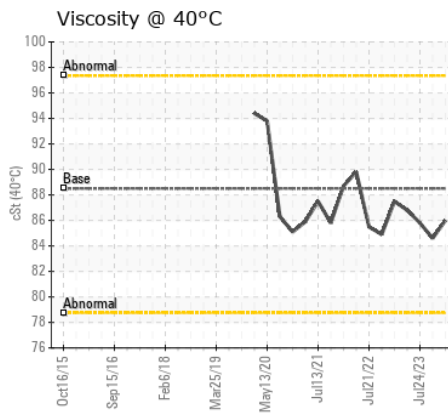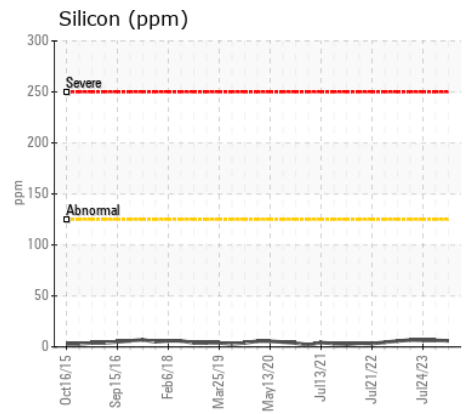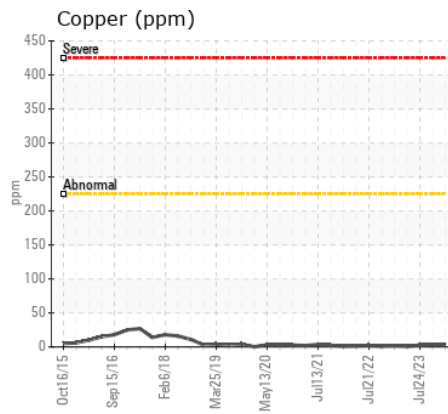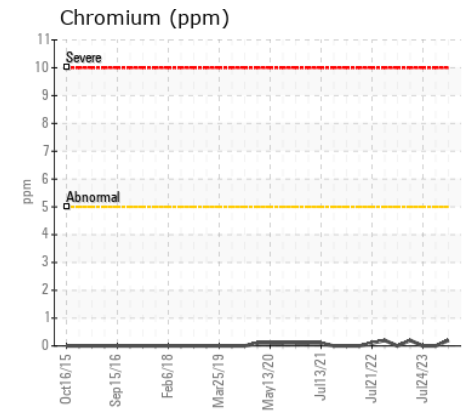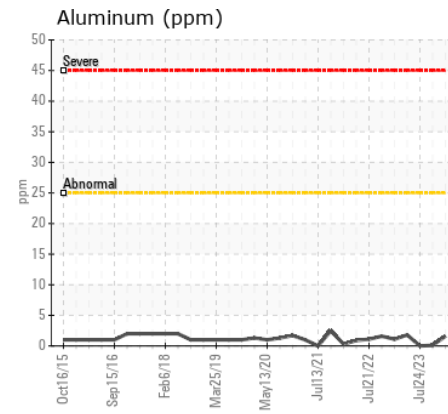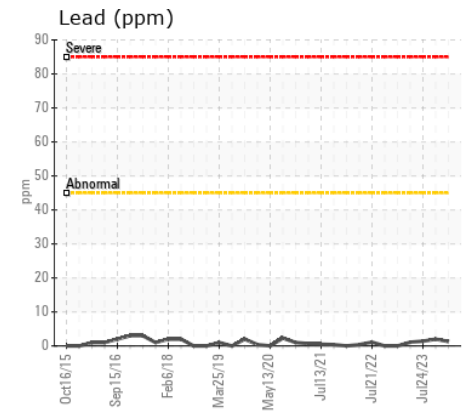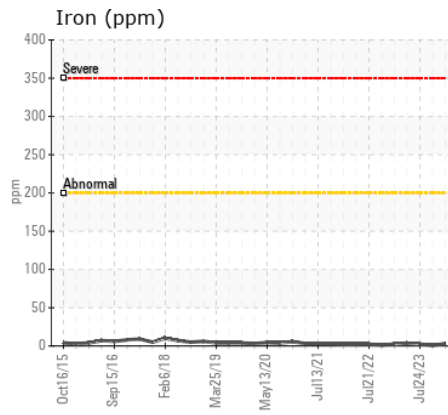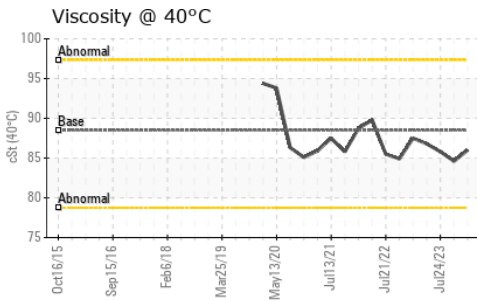

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0086336
Lab Number : 06121855
Unique Number : 10936006
Test Package : MOB 1

Received : 18 Mar 2024
Tested : 19 Mar 2024
Diagnosed : 21 Mar 2024 - Jonathan Hester

Kemp Quarries - Pryor Stone - Pryor
 1050 E 520 Rd
 Pryor, OK
 US 74361
 Contact:
 pryor@pryorstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: