



WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**420026**

Component  
**Front Differential**

Fluid  
**PETRO CANADA TRAXON SYNTHETIC 75W90 (--- GAL)**

**RECOMMENDATION**

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0114488</b>	---	---
Sample Date		Client Info		<b>11 Mar 2024</b>	---	---
Machine Age	mls	Client Info		<b>199138</b>	---	---
Oil Age	mls	Client Info		<b>0</b>	---	---
Filter Age	mls	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

**WEAR**

Bearing and/or gear wear is indicated.

Iron	ppm	ASTM D5185m	>500	<b>▲ 550</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>3</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>1</b>	---	---
Copper	ppm	ASTM D5185m	>100	<b>▲ 210</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>MODER</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>39</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Water		WC Method	>.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>13</b>	---	---
Boron	ppm	ASTM D5185m	328	<b>116</b>	---	---
Barium	ppm	ASTM D5185m	1	<b>9</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>7</b>	---	---
Manganese	ppm	ASTM D5185m		<b>26</b>	---	---
Magnesium	ppm	ASTM D5185m	1	<b>102</b>	---	---
Calcium	ppm	ASTM D5185m	7	<b>115</b>	---	---
Phosphorus	ppm	ASTM D5185m	1145	<b>1252</b>	---	---
Zinc	ppm	ASTM D5185m	3	<b>177</b>	---	---
Sulfur	ppm	ASTM D5185m	17909	<b>21644</b>	---	---
Visc @ 40°C	cSt	ASTM D445	99.6	<b>98.27</b>	---	---

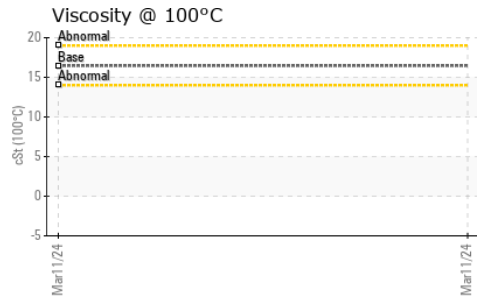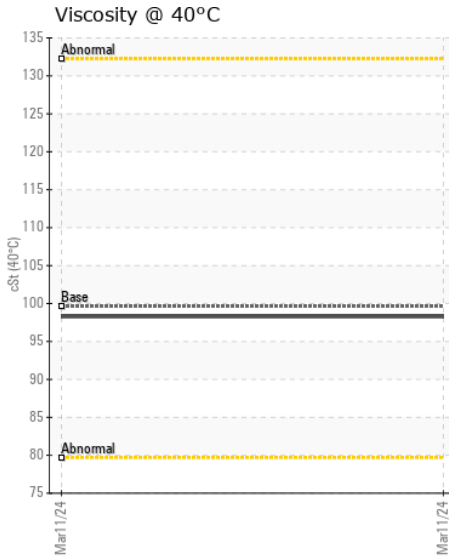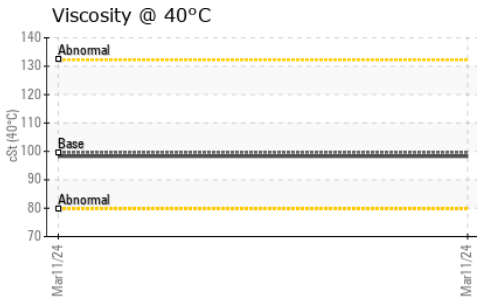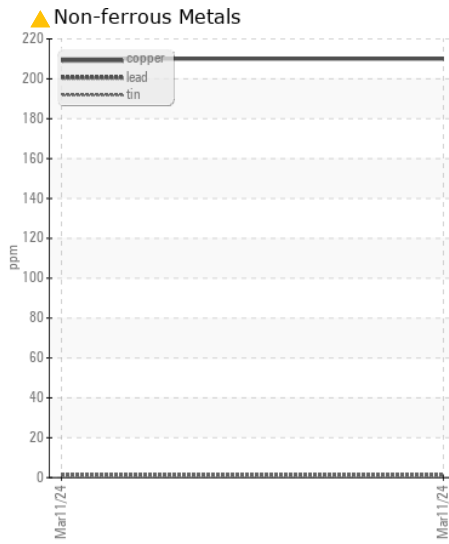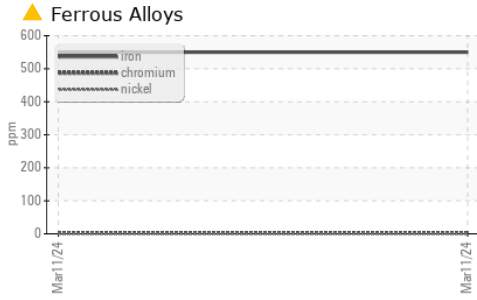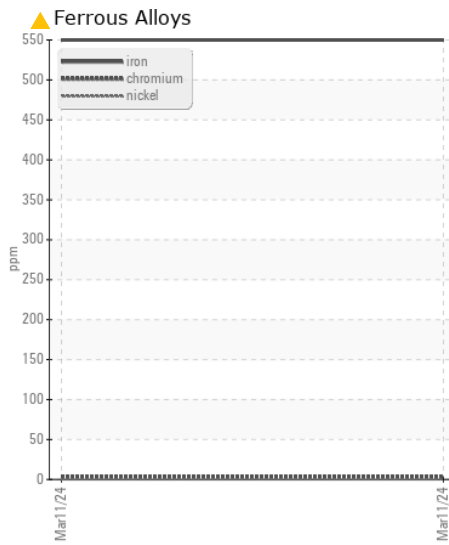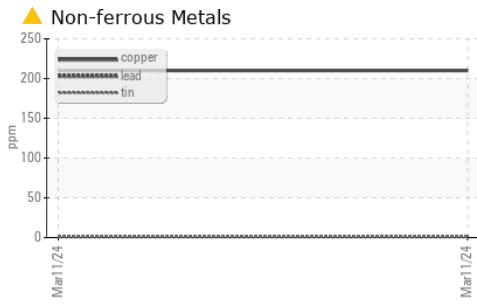

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0114488 **Received** : 19 Mar 2024  
**Lab Number** : 06122999 **Tested** : 25 Mar 2024  
**Unique Number** : 10937150 **Diagnosed** : 26 Mar 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: FT-IR, KV100 )

**GFL Environmental - 865 - East Mount Hauling**  
 7213 East Mount Houston Road  
 Houston, TX  
 US 77050  
 Contact: TECHNICIAN ACCOUNT  
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: