



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W64898]
 Machine Id
HITACHI 300LC 1FFDDP7M840740
 Component
Right Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (3 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W64898)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0205715	JR0192658	JR0161817
Sample Date		Client Info		18 Mar 2024	09 Nov 2023	19 May 2023
Machine Age	hrs	Client Info		3032	2535	1974
Oil Age	hrs	Client Info		1032	1096	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		25	122	128
Iron	ppm	ASTM D5185m	>500	28	174	245
Chromium	ppm	ASTM D5185m	>10	0	3	4
Nickel	ppm	ASTM D5185m	>10	0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>25	0	1	2
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	0	<1	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>75	3	7	8
Potassium	ppm	ASTM D5185m	>20	0	6	10
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m		0	0	1
Boron	ppm	ASTM D5185m		33	13	52
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		4	<1	0
Manganese	ppm	ASTM D5185m		0	2	5
Magnesium	ppm	ASTM D5185m		18	2	2
Calcium	ppm	ASTM D5185m		26	39	15
Phosphorus	ppm	ASTM D5185m		476	330	528
Zinc	ppm	ASTM D5185m		19	5	35
Sulfur	ppm	ASTM D5185m		23121	17669	20721
Visc @ 40°C	cSt	ASTM D445		140	142	185

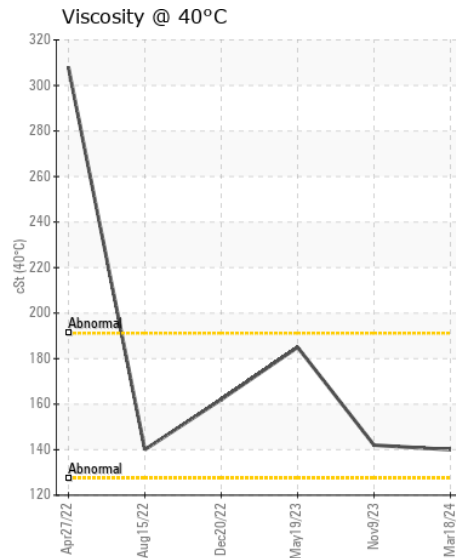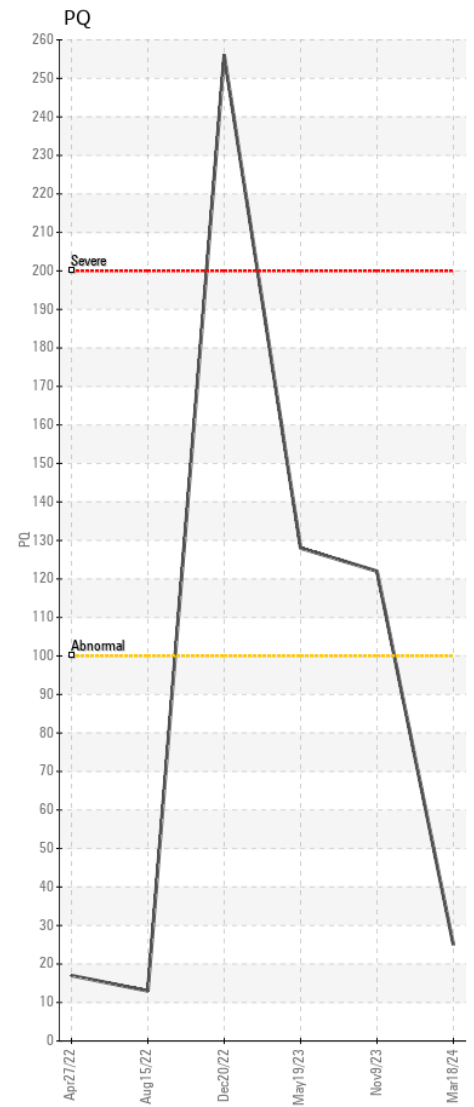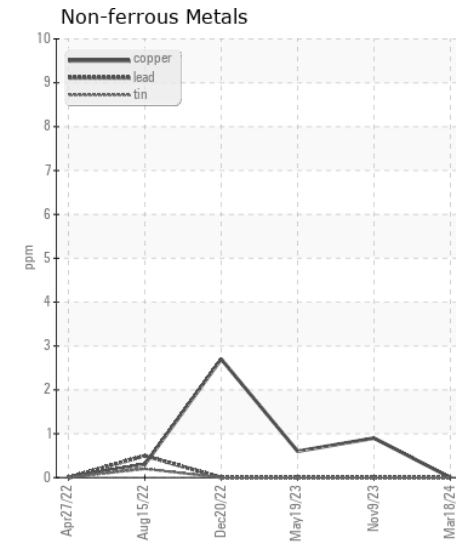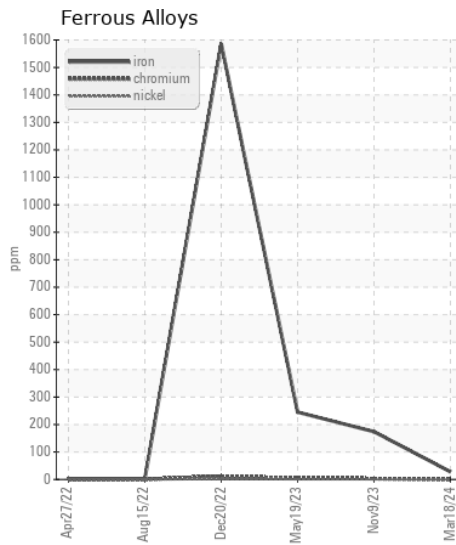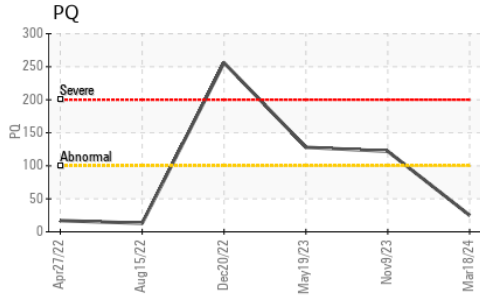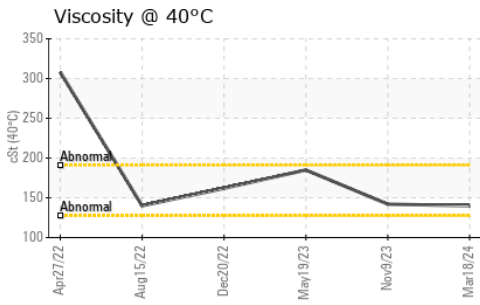

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0205715 **Received** : 20 Mar 2024
Lab Number : 06123901 **Tested** : 21 Mar 2024
Unique Number : 10938052 **Diagnosed** : 22 Mar 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)