



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
MACK GR64F XT2507 (S/N 1M2GR4GC7KM010397)
Component
Diesel Engine
Fluid
DURALENE Dura-Max Xtreme 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0033771	---	---
Sample Date		Client Info		19 Mar 2024	---	---
Machine Age	mls	Client Info		101153	---	---
Oil Age	mls	Client Info		15000	---	---
Filter Age	mls	Client Info		15000	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	50	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>40	2	---	---
Copper	ppm	ASTM D5185m	>330	16	---	---
Tin	ppm	ASTM D5185m	>15	2	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>4	1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	11.8	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		4	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		59	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		744	---	---
Calcium	ppm	ASTM D5185m		1447	---	---
Phosphorus	ppm	ASTM D5185m		903	---	---
Zinc	ppm	ASTM D5185m		1188	---	---
Sulfur	ppm	ASTM D5185m		2869	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.58	---	---
Visc @ 100°C	cSt	ASTM D445		14.0	---	---

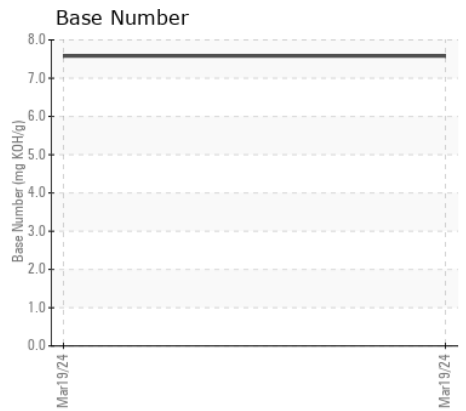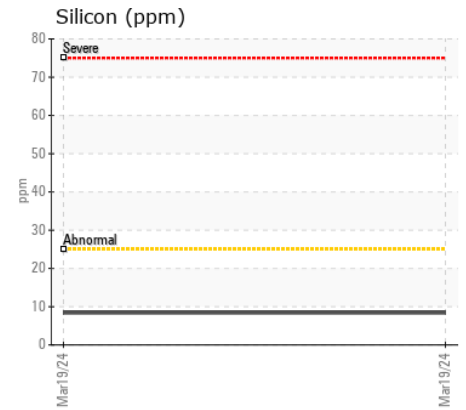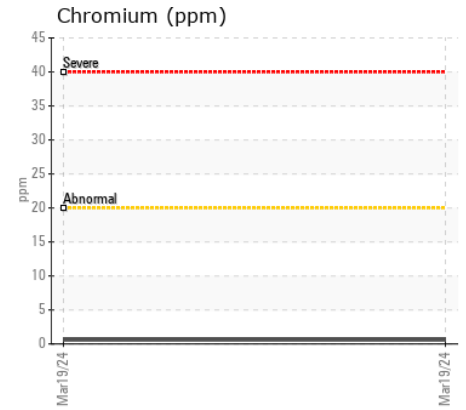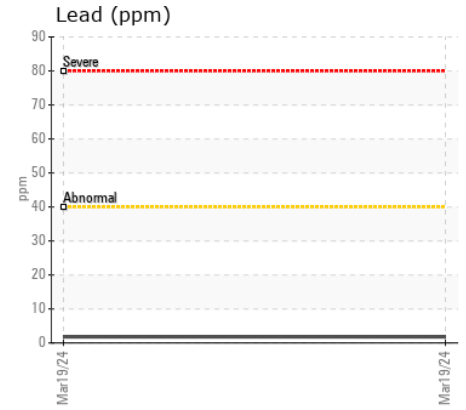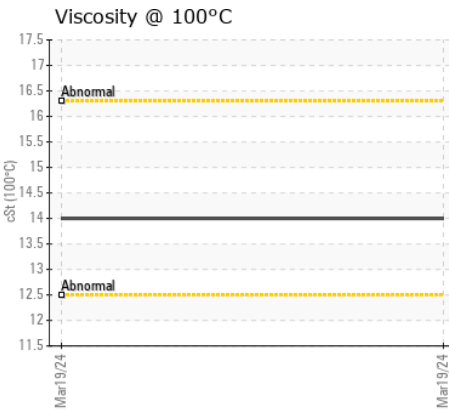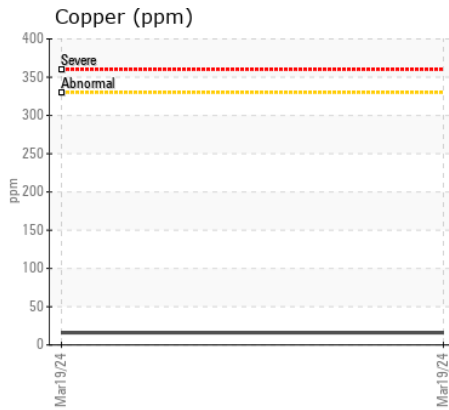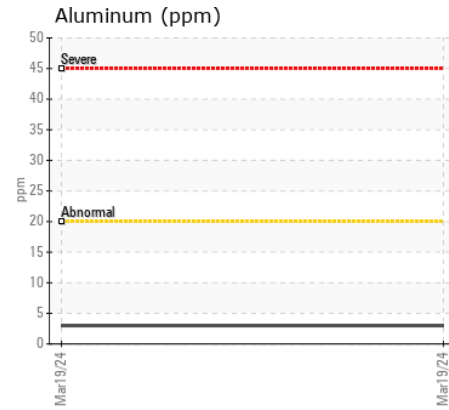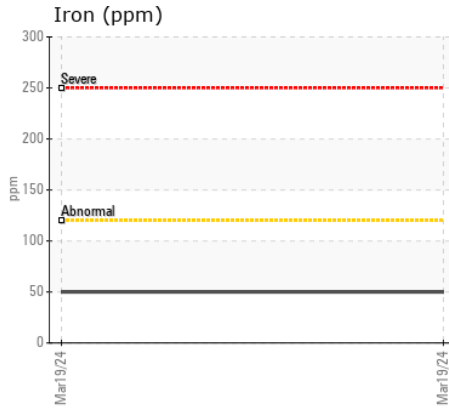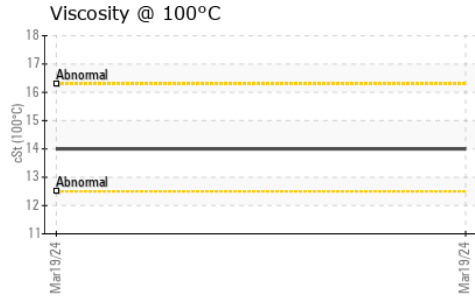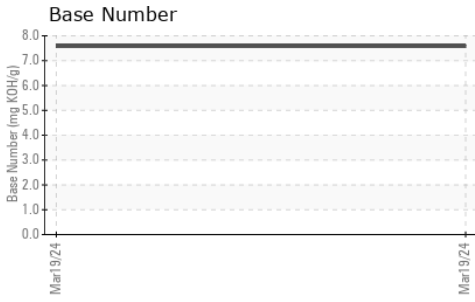

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0033771 **Received** : 21 Mar 2024
Lab Number : 06125126 **Tested** : 24 Mar 2024
Unique Number : 10939277 **Diagnosed** : 24 Mar 2024 - Wes Davis
Test Package : MOB 2

COMER CONSTRUCTION
 2100 SLADE LANE
 FOREST HILL, MD
 US 21050
 Contact: DONALD FOX
 dfox@comerconstruction.com
 T: (443)269-1379
 F: (410)638-0289

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)