



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[05W45976]

Machine Id

JOHN DEERE 750L 1T0750LXCNF430917

Component

Hydrostatic

Fluid

JOHN DEERE HYDRAU (30 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0210985	JR0196118	JR0181941
Sample Date		Client Info		08 Apr 2024	08 Dec 2023	15 Aug 2023
Machine Age	hrs	Client Info		2480	1970	1441
Oil Age	hrs	Client Info		2480	1970	1441
Filter Age	hrs	Client Info		510	1970	0
Oil Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Filter Changed		Client Info		Not Chngd	Changed	Not Chngd
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>31	15	14	8
Chromium	ppm	ASTM D5185m	>9	0	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	2	1	<1
Lead	ppm	ASTM D5185m	>11	0	0	0
Copper	ppm	ASTM D5185m	>41	7	6	5
Tin	ppm	ASTM D5185m	>5	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>31	0	1	1
Potassium	ppm	ASTM D5185m	>20	4	3	0
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>20000	1763	▲ 45384	796
Particles >6µm		ASTM D7647	>5000	166	▲ 11138	136
Particles >14µm		ASTM D7647	>640	10	▲ 1673	9
Particles >21µm		ASTM D7647	>160	4	▲ 444	4
Particles >38µm		ASTM D7647	>40	0	7	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	18/15/10	▲ 23/21/18	17/14/10
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	0	0	0
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		2	2	2
Calcium	ppm	ASTM D5185m	87	177	103	100
Phosphorus	ppm	ASTM D5185m	727	712	630	655
Zinc	ppm	ASTM D5185m	900	841	858	848
Sulfur	ppm	ASTM D5185m	1500	1792	1916	1947
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.93	0.69	---
Visc @ 40°C	cSt	ASTM D445	65	53.7	53.9	54.8

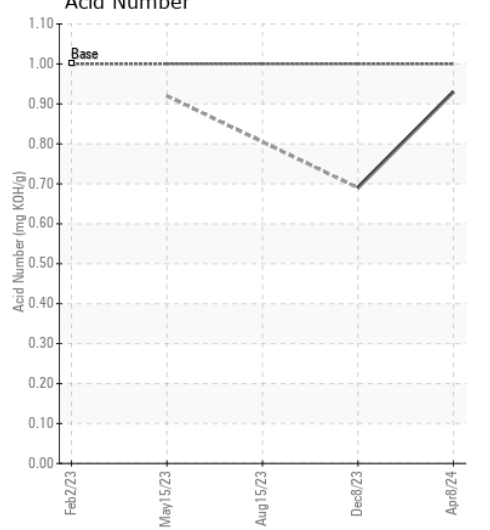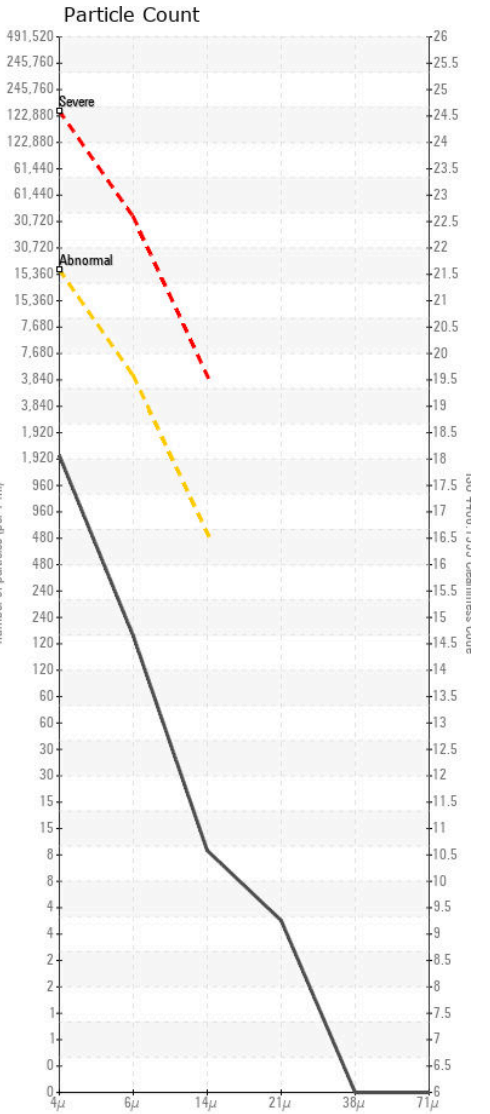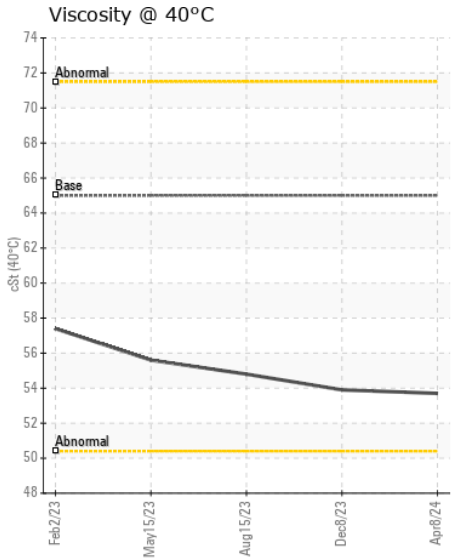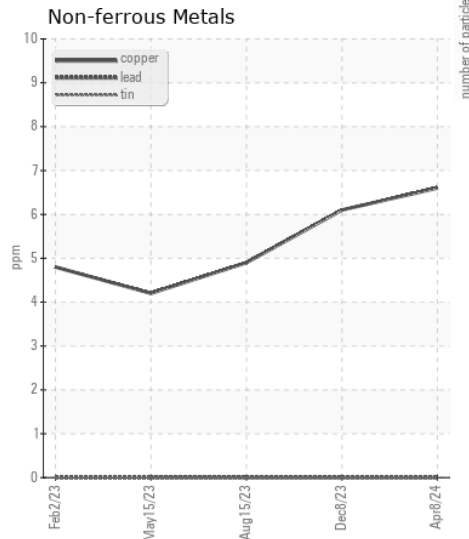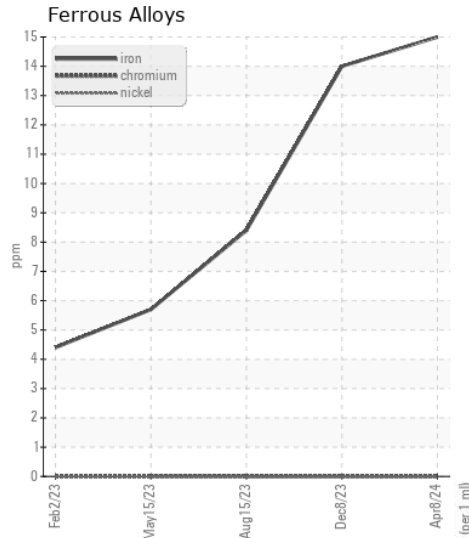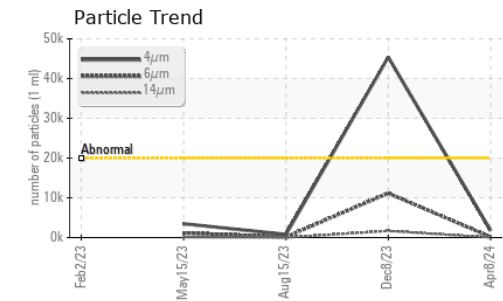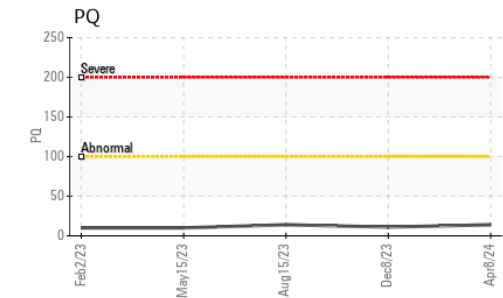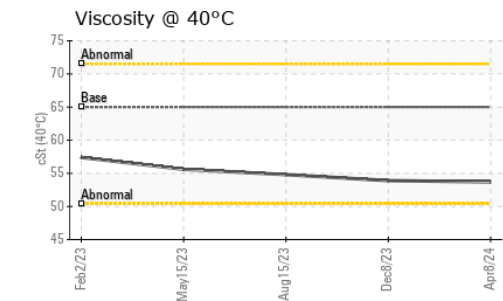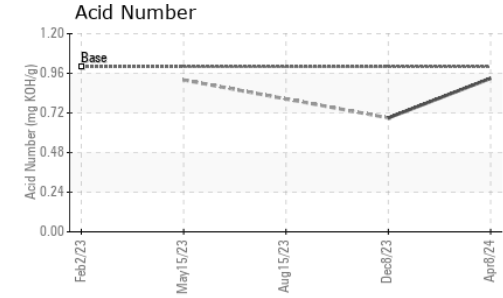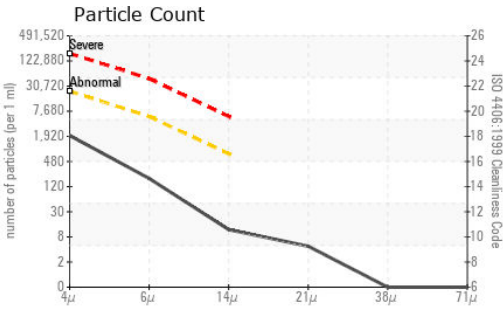

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0210985 **Received** : 10 Apr 2024
Lab Number : 06145378 **Tested** : 16 Apr 2024
Unique Number : 10970186 **Diagnosed** : 16 Apr 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PQ, PRTCOUNT)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111

Contact: DON VEST
 dvest@jamesriverequipment.com
 T: (703)631-8500
 F: (703)631-4715