



OIL ANALYSIS REPORT

| | |
|-----------------|------------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | ATTENTION |

Machine Id
JOHN DEERE 748L 1DW748LBALF706852

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- QTS)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | WE0006912 | --- | --- |
| Sample Date | | Client Info | | 25 Mar 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 5906 | --- | --- |
| Oil Age | hrs | Client Info | | 2 | --- | --- |
| Filter Age | hrs | Client Info | | 2 | --- | --- |
| Oil Changed | | Client Info | | Changed | --- | --- |
| Filter Changed | | Client Info | | Changed | --- | --- |
| Sample Status | | | | ATTENTION | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|-----|-----|
| Iron | ppm | ASTM D5185m | >51 | 8 | --- | --- |
| Chromium | ppm | ASTM D5185m | >11 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >5 | <1 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | >3 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >31 | 1 | --- | --- |
| Lead | ppm | ASTM D5185m | >26 | 2 | --- | --- |
| Copper | ppm | ASTM D5185m | >26 | 7 | --- | --- |
| Tin | ppm | ASTM D5185m | >4 | 1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION









Fuel content negligible. There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|--------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >22 | 8 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 2 | --- | --- |
| Fuel | % | ASTM D3524 | >2.1 | 0.4 | --- | --- |
| Water | | WC Method | >0.21 | NEG | --- | --- |
| Glycol | | WC Method | | NEG | --- | --- |
| Soot % | % | *ASTM D7844 | >3 | 0 | --- | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 5.1 | --- | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 14.5 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.21 | NEG | --- | --- |

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

| | | | | | | |
|------------------|----------|-------------|------|-------------|-----|-----|
| Sodium | ppm | ASTM D5185m | >31 | 2 | --- | --- |
| Boron | ppm | ASTM D5185m | | 0 | --- | --- |
| Barium | ppm | ASTM D5185m | | 1 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 3 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 4 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | 29 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 2434 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 951 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 1109 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 4529 | --- | --- |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 8.6 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 13.6 | 6.9 | --- | --- |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 10.2 | --- | --- |

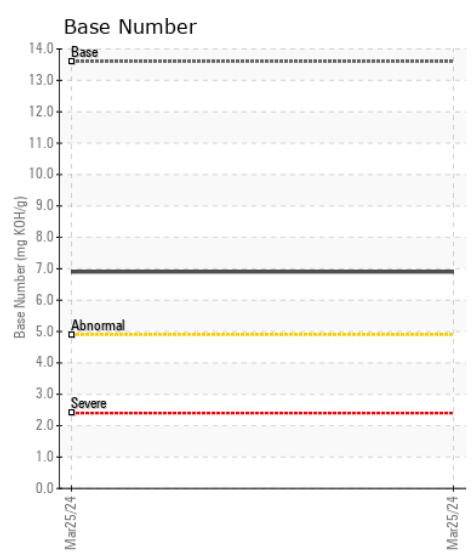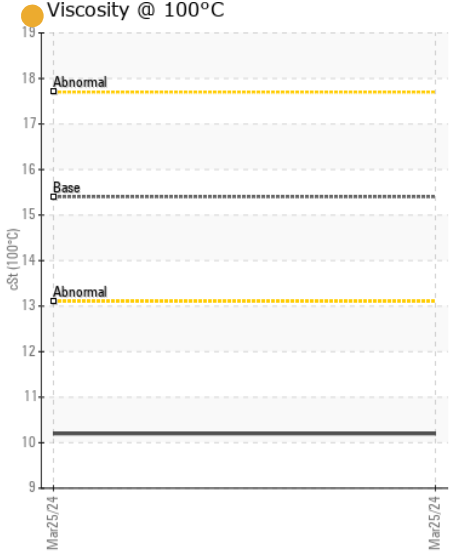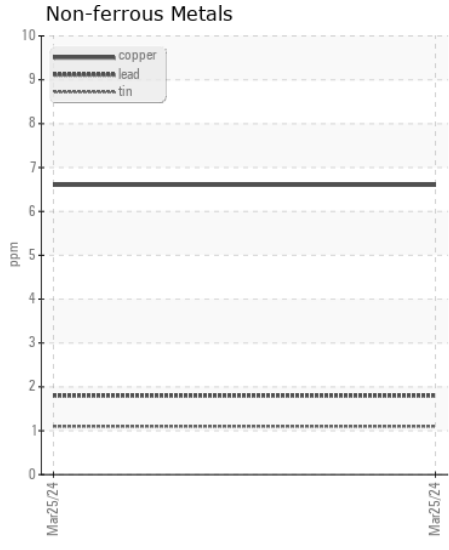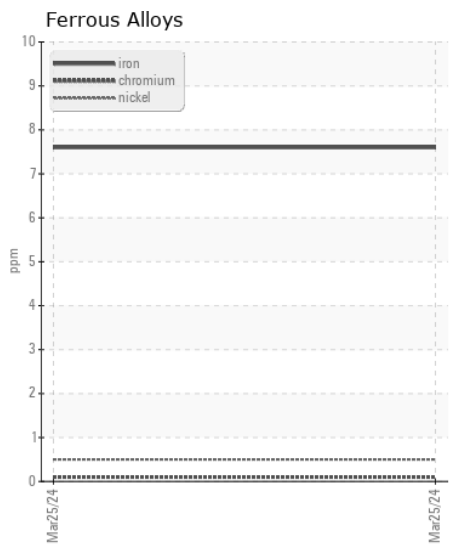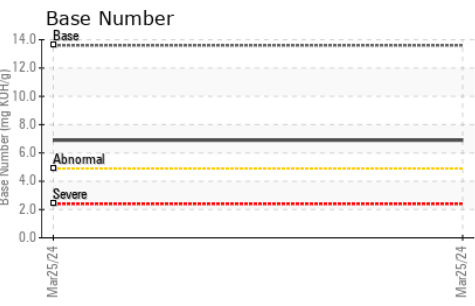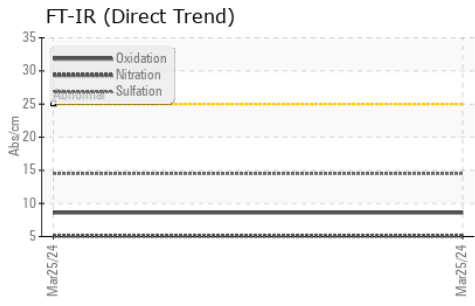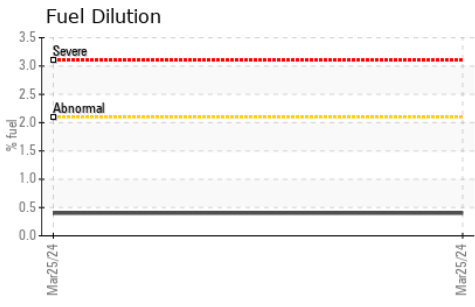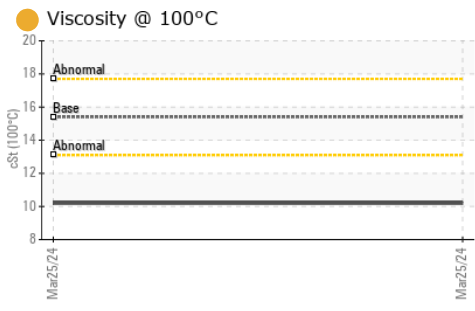

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0006912 **Received** : 11 Apr 2024
Lab Number : 06145577 **Tested** : 16 Apr 2024
Unique Number : 10970385 **Diagnosed** : 16 Apr 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT
 P.O. BOX 412
 NORTHPORT, AL
 US 35476
 Contact: PAMELA CLARK
 pamel@warriortractor.com
 T: (205)339-0300
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)