



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[16W15986]

Machine Id

JOHN DEERE 843L-II 1DW843LBKNF713806

Component

Gearbox

Fluid

JOHN DEERE HY-GARD HYD/TRANS (1 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 16W15986)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0161002	JR0185683	JR0173628
Sample Date		Client Info		09 Apr 2024	29 Nov 2023	19 Jun 2023
Machine Age	hrs	Client Info		2272	1771	1150
Oil Age	hrs	Client Info		1122	621	633
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Chngd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		17	13	17
Iron	ppm	ASTM D5185m	>200	49	24	39
Chromium	ppm	ASTM D5185m	>10	2	<1	<1
Nickel	ppm	ASTM D5185m	>10	1	0	0
Titanium	ppm	ASTM D5185m		1	<1	1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>25	2	<1	4
Lead	ppm	ASTM D5185m	>50	1	0	0
Copper	ppm	ASTM D5185m	>200	2	0	<1
Tin	ppm	ASTM D5185m	>10	1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>50	10	6	14
Potassium	ppm	ASTM D5185m	>20	3	<1	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	1	3
Boron	ppm	ASTM D5185m	6	<1	0	0
Barium	ppm	ASTM D5185m	0	1	0	0
Molybdenum	ppm	ASTM D5185m	0	2	0	0
Manganese	ppm	ASTM D5185m		2	<1	<1
Magnesium	ppm	ASTM D5185m	145	123	95	99
Calcium	ppm	ASTM D5185m	3570	4290	3093	3410
Phosphorus	ppm	ASTM D5185m	1290	1411	970	980
Zinc	ppm	ASTM D5185m	1640	1532	1160	1207
Sulfur	ppm	ASTM D5185m		4862	3191	4048
Visc @ 40°C	cSt	ASTM D445	57.0	50.8	51.3	50.8

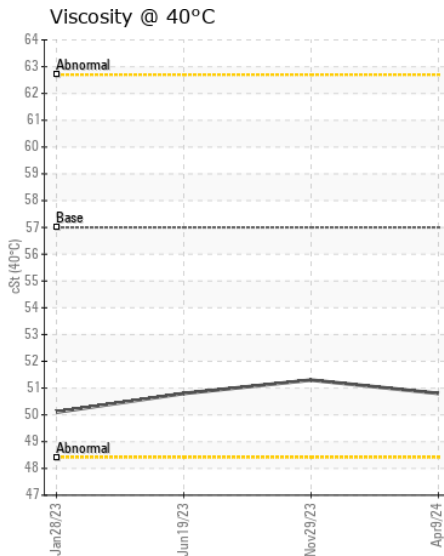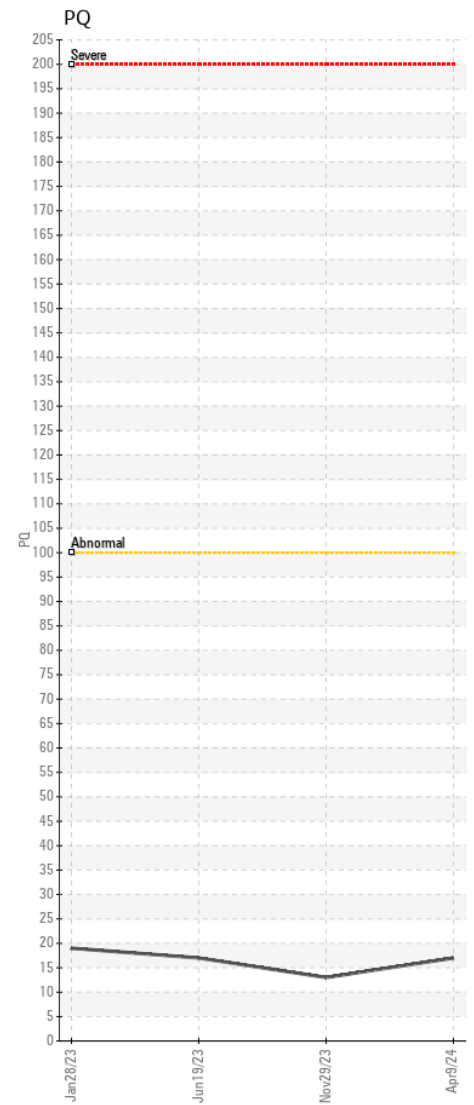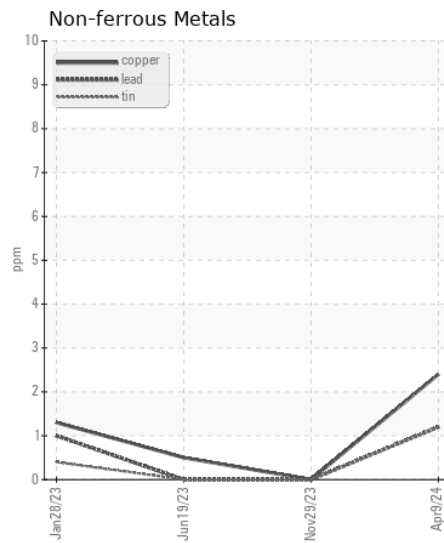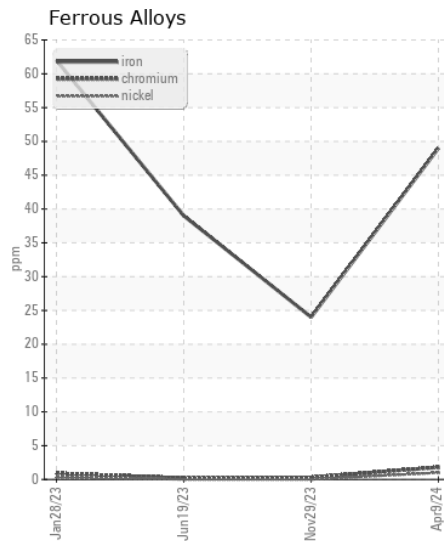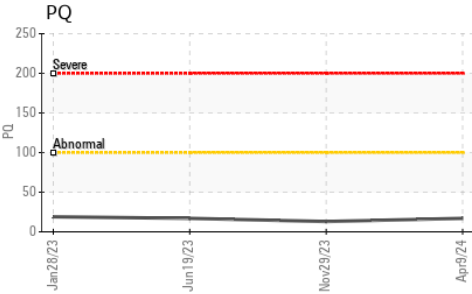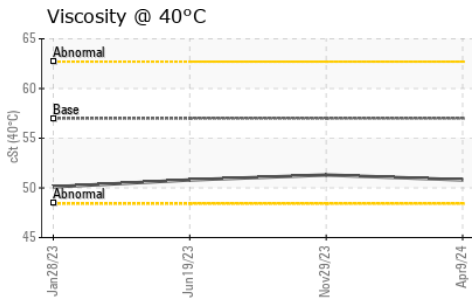

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0161002 **Received** : 11 Apr 2024
Lab Number : 06146080 **Tested** : 12 Apr 2024
Unique Number : 10976158 **Diagnosed** : 15 Apr 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - CASTLE HAYNE
 113 CROWATAN ROAD
 CASTLE HAYNE, NC
 US 28429-5819

Contact: WILMINGTON SHOP

todd.simmons@jamesriverequipment.com; canastasio@wearcheck.com; canastasio@we

T: (910)675-9211

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: