



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 200G 1FF200GXANF085246**

Component  
**Pump Drive**

Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0205054</b>	---	---
Sample Date		Client Info		<b>10 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>436</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Test	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>20</b>	---	---
Iron	ppm	ASTM D5185m	>151	<b>37</b>	---	---
Chromium	ppm	ASTM D5185m	>11	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>21	<b>1</b>	---	---
Lead	ppm	ASTM D5185m	>51	<b>1</b>	---	---
Copper	ppm	ASTM D5185m	>51	<b>2</b>	---	---
Tin	ppm	ASTM D5185m	>4	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION






There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	<b>13</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>51	<b>1</b>	---	---
Boron	ppm	ASTM D5185m		<b>71</b>	---	---
Barium	ppm	ASTM D5185m		<b>7</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>113</b>	---	---
Manganese	ppm	ASTM D5185m		<b>3</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>16</b>	---	---
Calcium	ppm	ASTM D5185m		<b>4171</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>1266</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1292</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>10050</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>67.2</b>	---	---

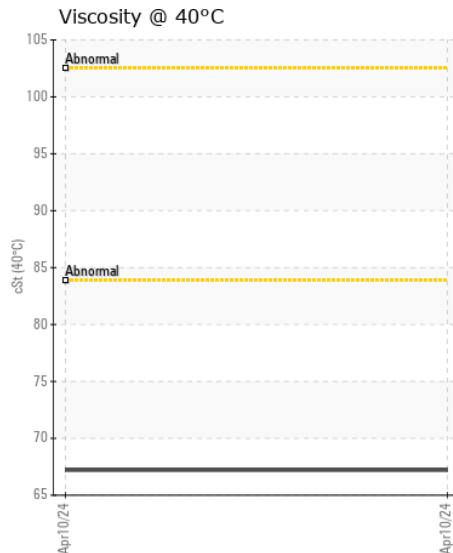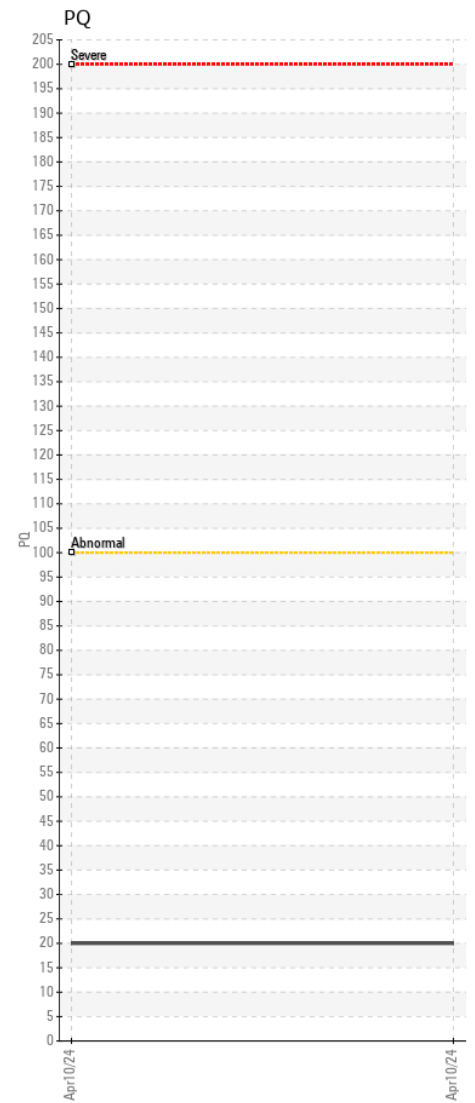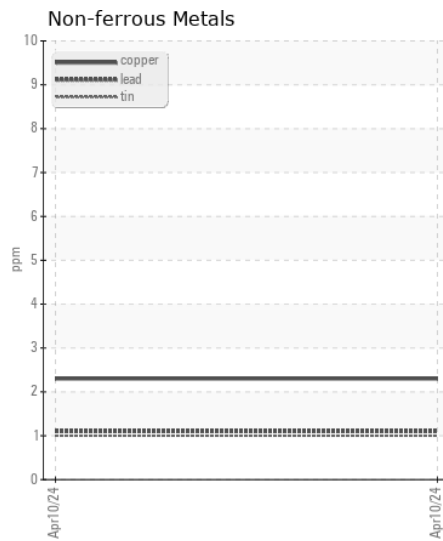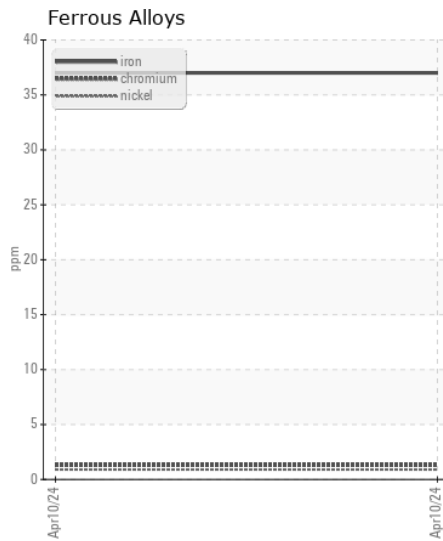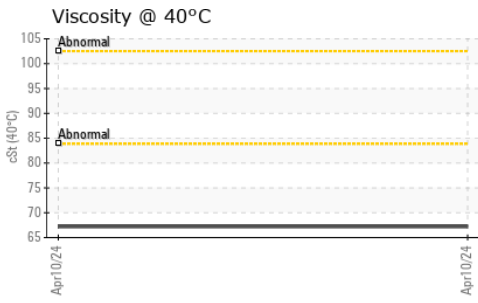

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0205054 **Received** : 11 Apr 2024  
**Lab Number** : 06146141 **Tested** : 12 Apr 2024  
**Unique Number** : 10976219 **Diagnosed** : 15 Apr 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - GREENSBORO**  
 411 SOUTH REGIONAL ROAD  
 GREENSBORO, NC  
 US 27409  
 Contact: NICK GALLAHER  
 NGALLAHER@JRENET.COM  
 T: (336)668-2762  
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)