



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FORD F350 GEC#1094
 Component
Gasoline Engine
 Fluid
MOBIL DELVAC 1300 SUPER 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TLY0002225	TLY0002241	TLY0002001
Sample Date		Client Info		03 Apr 2024	25 Jan 2024	21 Nov 2023
Machine Age	mls	Client Info		28452	21450	15098
Oil Age	mls	Client Info		21450	15098	15098
Filter Age	mls	Client Info		21450	15098	15098
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	17	21	40
Chromium	ppm	ASTM D5185m	>20	<1	2	4
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	2
Aluminum	ppm	ASTM D5185m	>40	0	2	2
Lead	ppm	ASTM D5185m	>50	0	0	<1
Copper	ppm	ASTM D5185m	>155	0	2	11
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	8	9	11
Potassium	ppm	ASTM D5185m	>20	<1	0	3
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.5	0.4	0.5
Nitration	Abs/cm	*ASTM D7624	>20	9.2	9.6	10.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.9	20.9	22.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	2	2	2
Boron	ppm	ASTM D5185m		14	19	29
Barium	ppm	ASTM D5185m		0	0	1
Molybdenum	ppm	ASTM D5185m		49	42	38
Manganese	ppm	ASTM D5185m		0	<1	3
Magnesium	ppm	ASTM D5185m		744	587	459
Calcium	ppm	ASTM D5185m		1413	1219	1308
Phosphorus	ppm	ASTM D5185m		947	751	687
Zinc	ppm	ASTM D5185m		1042	871	822
Sulfur	ppm	ASTM D5185m		3240	2320	2830
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.0	19.7	21.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	8.9	8.4	7.1
Visc @ 100°C	cSt	ASTM D445	11.9	10.0	9.1	9.4

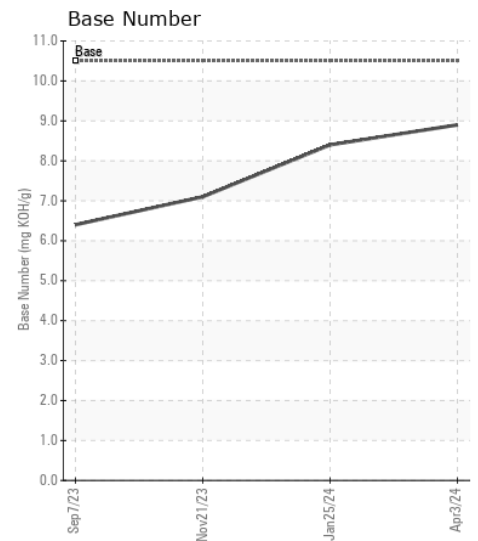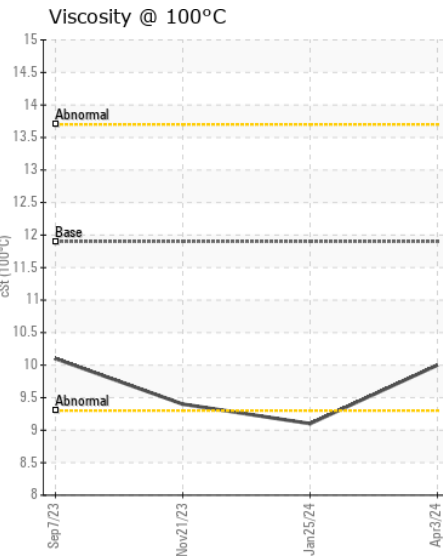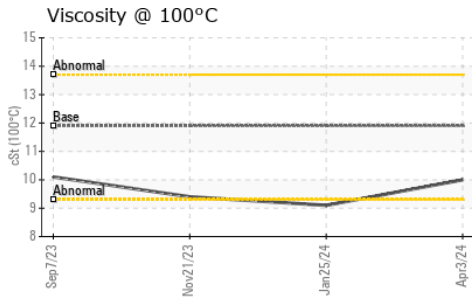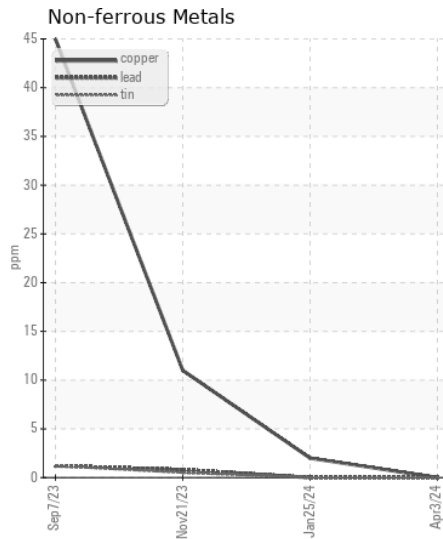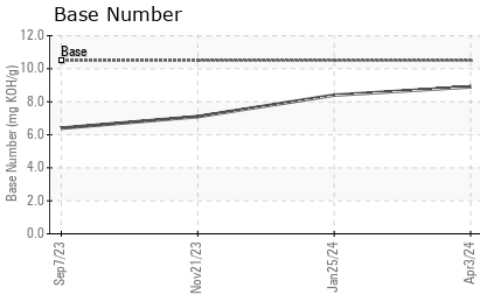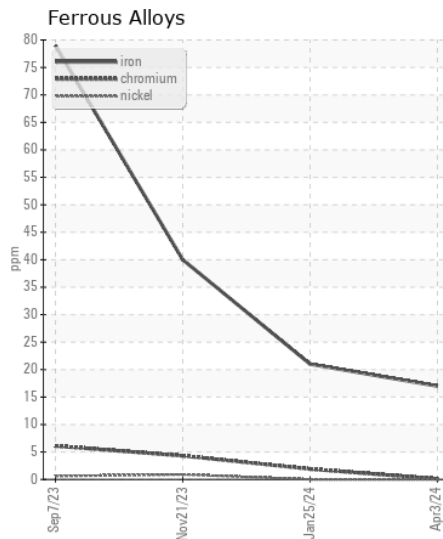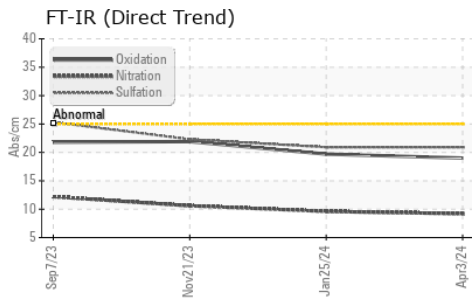

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TLY0002225 **Received** : 12 Apr 2024
Lab Number : 06146968 **Tested** : 15 Apr 2024
Unique Number : 10977046 **Diagnosed** : 15 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

GAINES & COMPANY
 112 WESTMINSTER RD
 REISTERSTOWN, MD
 US 21136
 Contact: JOE FALISE
 JFALISE@GAINESANDCO.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: