



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
F16583
 Component
Compressor
 Fluid
COMPRESSOR OIL (PAO) ISO 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CCSI2014017	---	---
Sample Date		Client Info		25 Mar 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	1	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m		<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>25	1	---	---
Lead	ppm	ASTM D5185m	>25	1	---	---
Copper	ppm	ASTM D5185m	>50	<1	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	0	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>10000	1098	---	---
Particles >6µm		ASTM D7647	>2500	358	---	---
Particles >14µm		ASTM D7647	>320	36	---	---
Particles >21µm		ASTM D7647	>80	11	---	---
Particles >38µm		ASTM D7647	>20	0	---	---
Particles >71µm		ASTM D7647	>4	0	---	---
Oil Cleanliness		ISO 4406 (c)	>20/18/15	17/16/12	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	1	0	---	---
Barium	ppm	ASTM D5185m	1	<1	---	---
Molybdenum	ppm	ASTM D5185m	1	<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	1	<1	---	---
Calcium	ppm	ASTM D5185m	1	3	---	---
Phosphorus	ppm	ASTM D5185m	800	932	---	---
Zinc	ppm	ASTM D5185m	20	0	---	---
Sulfur	ppm	ASTM D5185m	37	0	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.24	0.20	---	---
Visc @ 40°C	cSt	ASTM D445	46	43.5	---	---

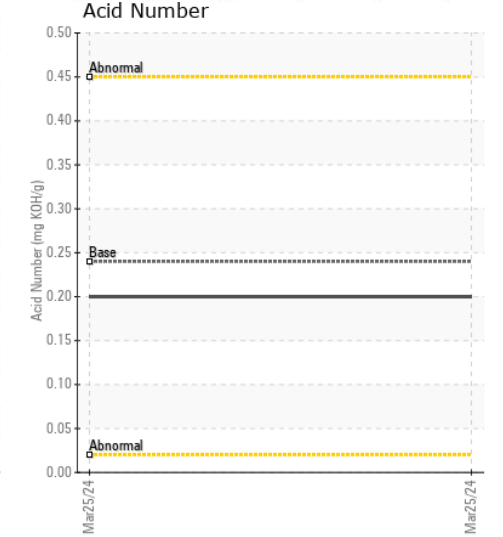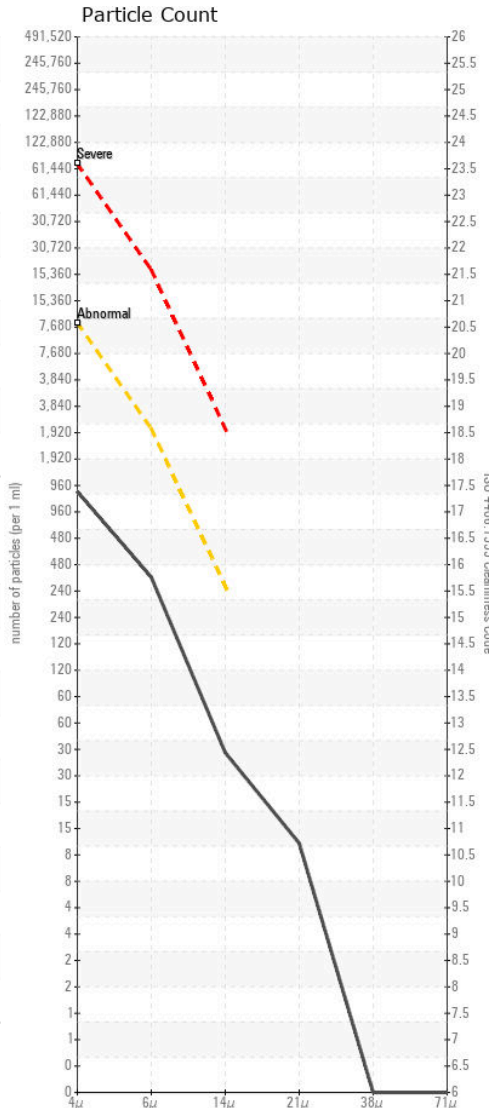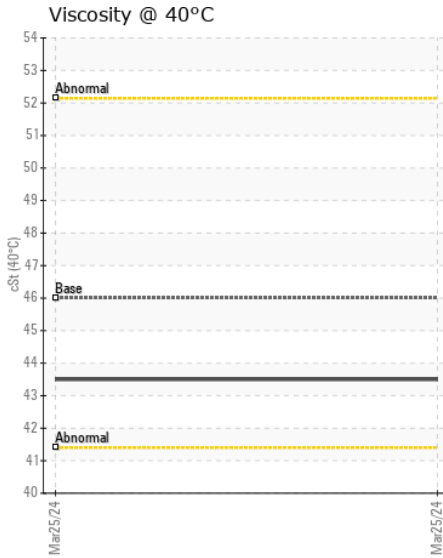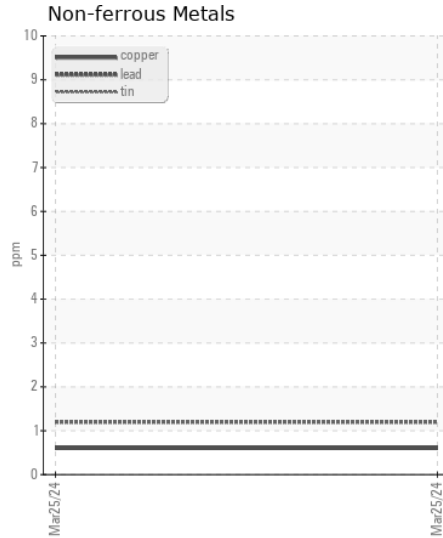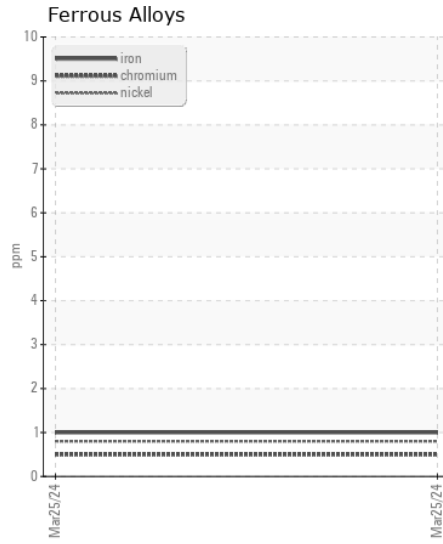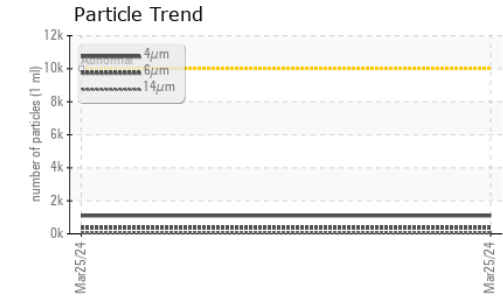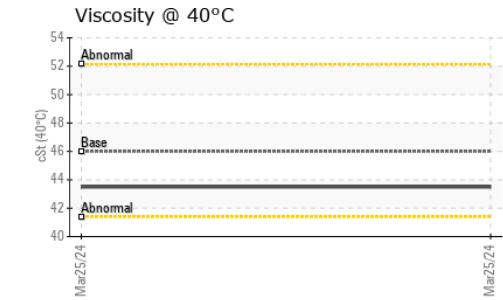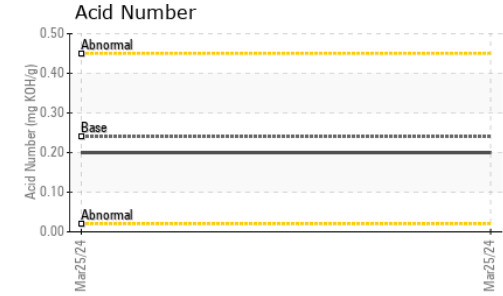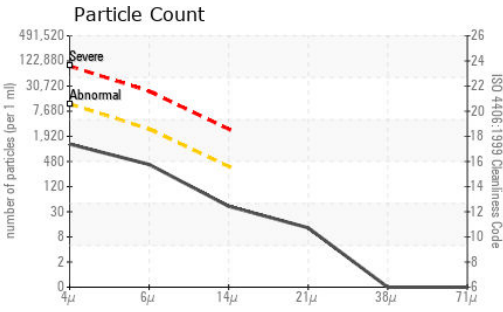

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : CCSI2014017 **Received** : 12 Apr 2024
Lab Number : 06147324 **Tested** : 15 Apr 2024
Unique Number : 10977402 **Diagnosed** : 16 Apr 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: PrtCount)

HOLLYWOOD WASTE WATER TREATMENT PLANT
 1621 N 14TH AVE
 HOLLYWOOD, FL
 US 33021
 Contact: JOEL WALL
 jwall@hollywoodfl.org
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)