



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
PALASYN 45
Machine Id
SULLIVAN PALATEK 1503110001 - RDO WASHBURN ND
Component
Compressor

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		UCS06147435	UCS04176064	---
Sample Date		Client Info		03 Apr 2024	21 Feb 2017	---
Machine Age	hrs	Client Info		26932	7771	---
Oil Age	hrs	Client Info		6000	5820	---
Filter Age	hrs	Client Info		6000	5820	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	0	<1	---
Chromium	ppm	ASTM D5185m	>10	0	0	---
Nickel	ppm	ASTM D5185m		0	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	0	<1	---
Lead	ppm	ASTM D5185m	>25	0	<1	---
Copper	ppm	ASTM D5185m	>50	0	<1	---
Tin	ppm	ASTM D5185m	>15	0	2	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the component.

Silicon	ppm	ASTM D5185m	>25	2	4	---
Potassium	ppm	ASTM D5185m	>20	<1	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	0	---
Boron	ppm	ASTM D5185m	0.0	0	<1	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0	0	0	---
Manganese	ppm	ASTM D5185m	0	0	<1	---
Magnesium	ppm	ASTM D5185m	0.0	0	2	---
Calcium	ppm	ASTM D5185m	0.0	0	0	---
Phosphorus	ppm	ASTM D5185m	966	602	643	---
Zinc	ppm	ASTM D5185m	0	0	<1	---
Sulfur	ppm	ASTM D5185m	1309	372	272	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.172	0.08	0.051	---
Visc @ 40°C	cSt	ASTM D445	39.9	43.1	42.32	---

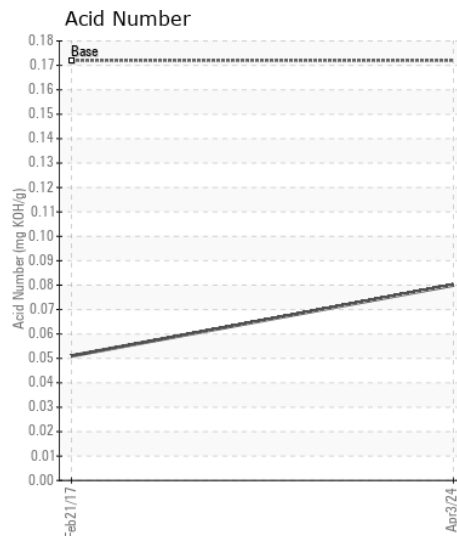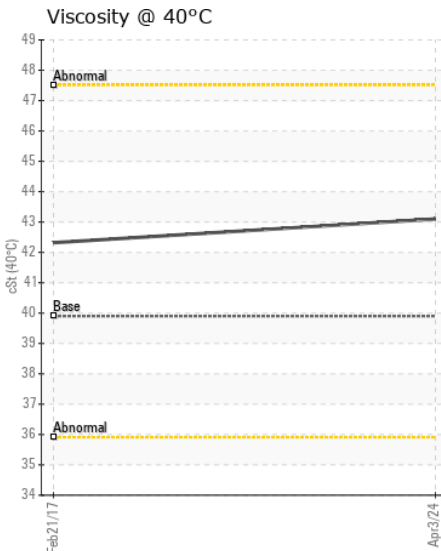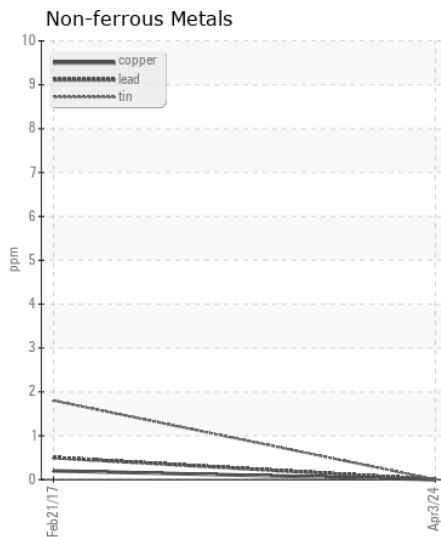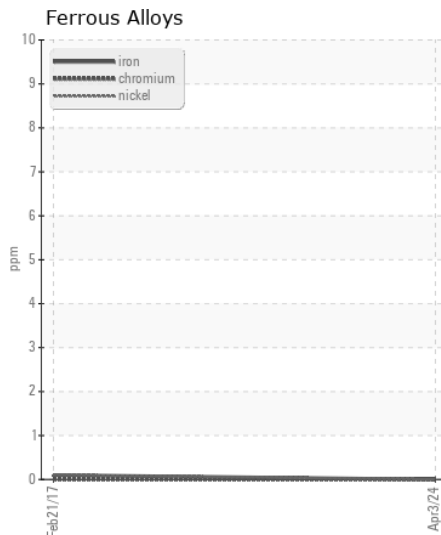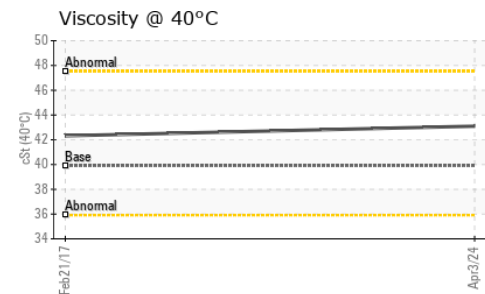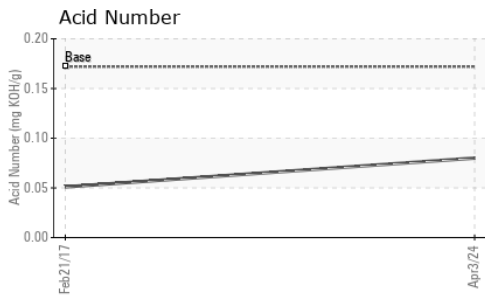

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : UCS06147435 **Received** : 12 Apr 2024
Lab Number : 06147435 **Tested** : 15 Apr 2024
Unique Number : 10977513 **Diagnosed** : 16 Apr 2024 - Sean Felton
Test Package : IND 2

JEMCO-MAXAIR
 WEST FARGO, ND
 US 58078
 Contact: DALE K
 dalek@jemco-maxair.com
 T: (701)281-0362
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)