



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[B51461 BROCHU]

Machine Id

PONSSE A011046

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 5W40 (--- GAL)

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP452156	---	---
Sample Date		Client Info		06 Apr 2024	---	---
Machine Age	hrs	Client Info		2174	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	7	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		16	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	4	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	2	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	5	---	---
Potassium	ppm	ASTM D5185m	>20	7	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>44	1	---	---
Boron	ppm	ASTM D5185m	250	81	---	---
Barium	ppm	ASTM D5185m	10	0	---	---
Molybdenum	ppm	ASTM D5185m	100	37	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	450	790	---	---
Calcium	ppm	ASTM D5185m	3000	1610	---	---
Phosphorus	ppm	ASTM D5185m	1150	779	---	---
Zinc	ppm	ASTM D5185m	1350	904	---	---
Sulfur	ppm	ASTM D5185m	4250	3370	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.3	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.2	---	---

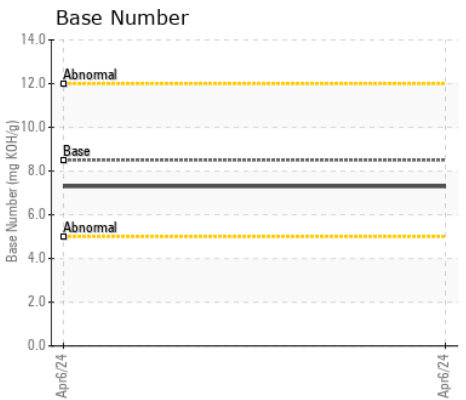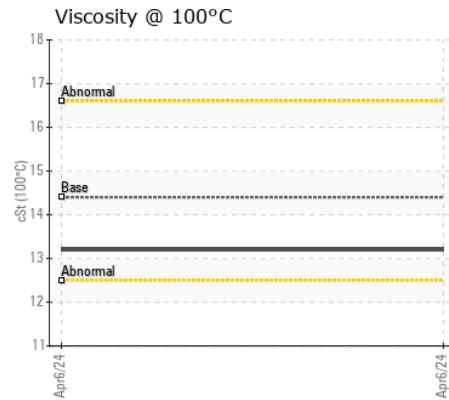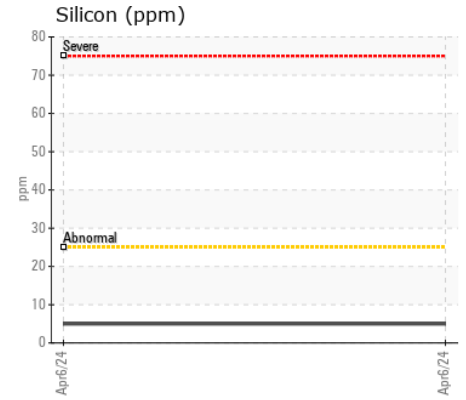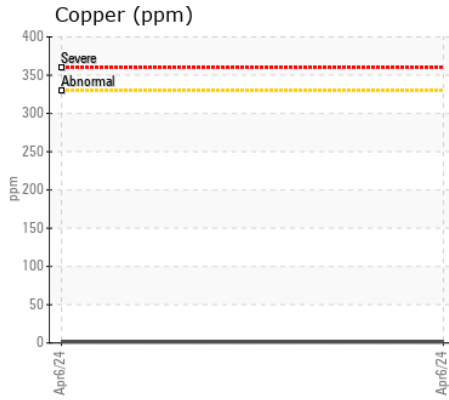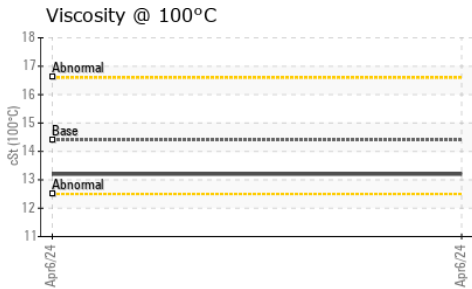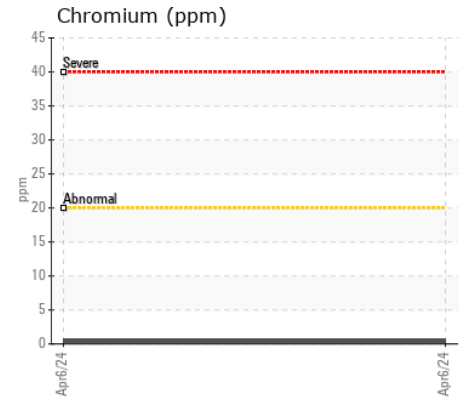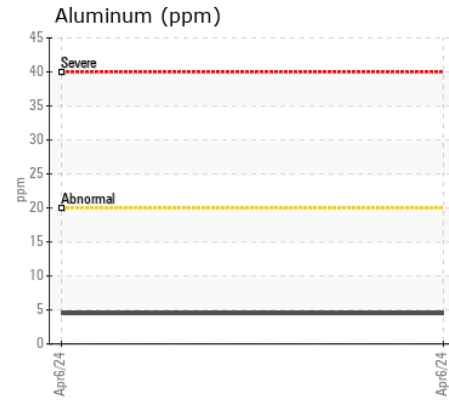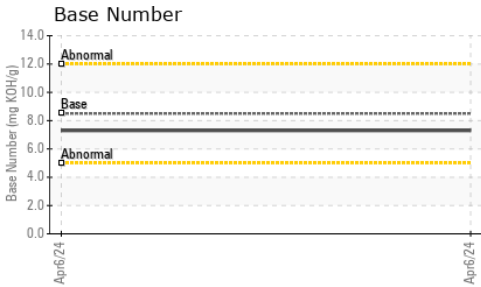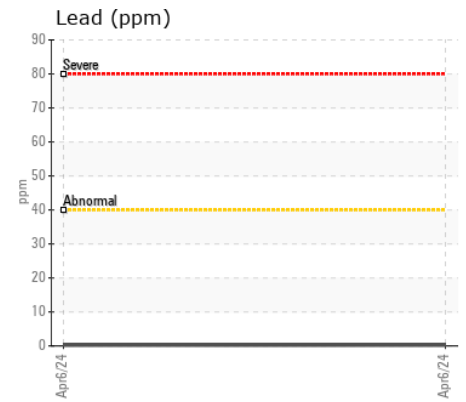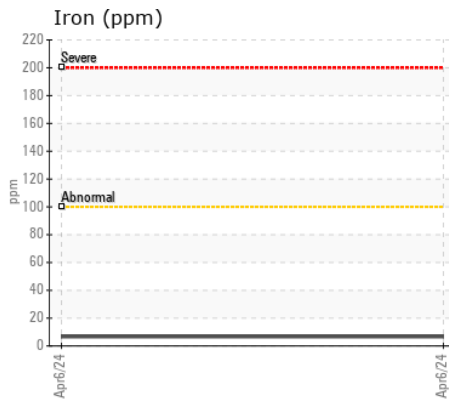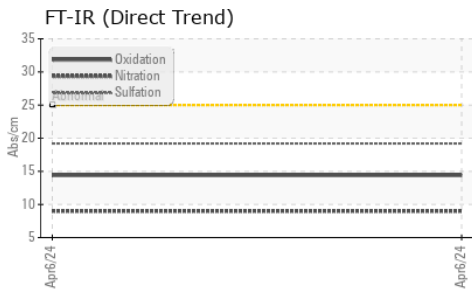

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP452156 **Received** : 15 Apr 2024  
**Lab Number** : 06148351 **Tested** : 15 Apr 2024  
**Unique Number** : 10978429 **Diagnosed** : 15 Apr 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**CHADWICK-BAROSS INC**  
 188 PERRY ROAD  
 BANGOR, ME  
 US 04401

Contact: TED MENARD  
 Ted.Menard@chadwick-baross.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (207)942-4838  
 F: (207)941-0856