



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[B51461 BROCHA]
 Machine Id
PONSSE A011046
 Component
Drop Box
 Fluid
GEAR OIL SAE 75W140 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP452157	---	---
Sample Date		Client Info		06 Apr 2024	---	---
Machine Age	hrs	Client Info		2194	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>400	61	---	---
Chromium	ppm	ASTM D5185m	>4	1	---	---
Nickel	ppm	ASTM D5185m	>3	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>15	3	---	---
Lead	ppm	ASTM D5185m	>20	<1	---	---
Copper	ppm	ASTM D5185m	>50	2	---	---
Tin	ppm	ASTM D5185m	>3	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	LIGHT	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>60	6	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m	400	149	---	---
Barium	ppm	ASTM D5185m	200	1	---	---
Molybdenum	ppm	ASTM D5185m	12	2	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	12	6	---	---
Calcium	ppm	ASTM D5185m	150	102	---	---
Phosphorus	ppm	ASTM D5185m	1650	1046	---	---
Zinc	ppm	ASTM D5185m	125	57	---	---
Sulfur	ppm	ASTM D5185m	22500	23740	---	---
Visc @ 40°C	cSt	ASTM D445	183	183	---	---

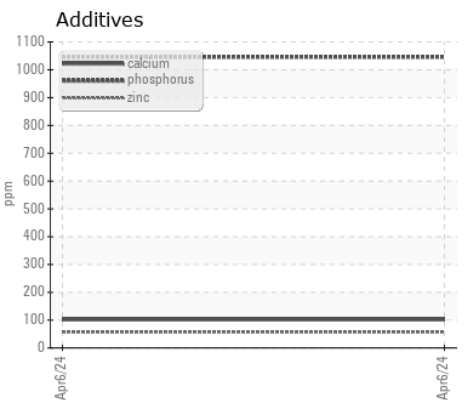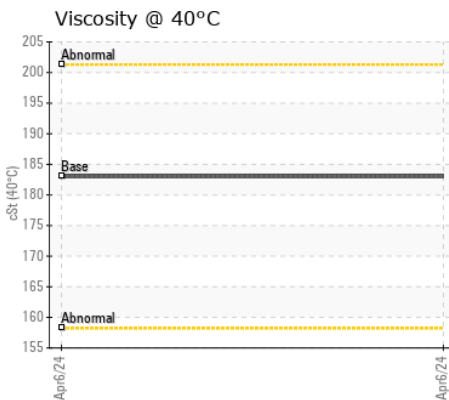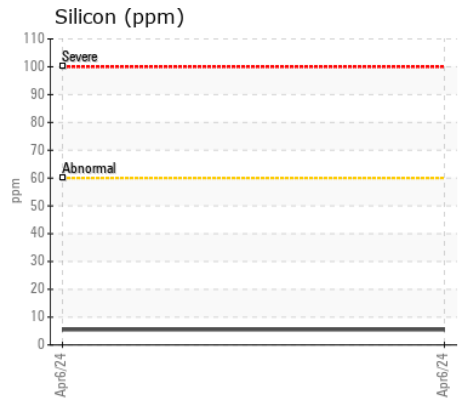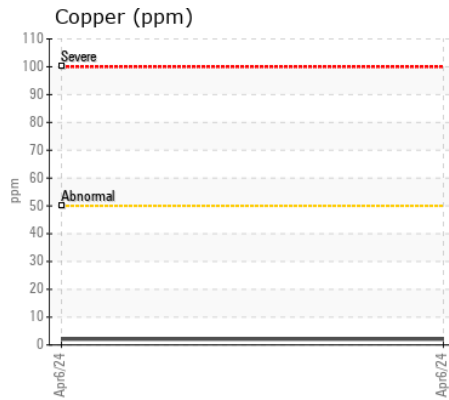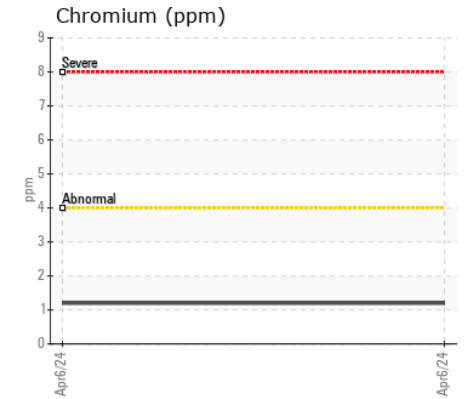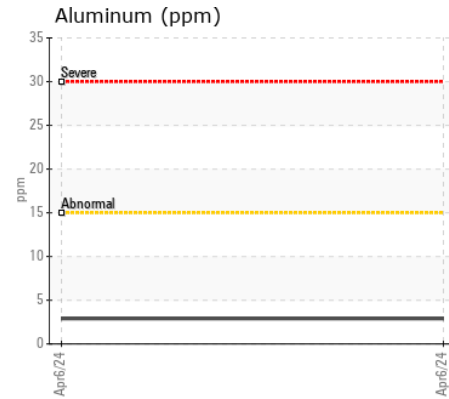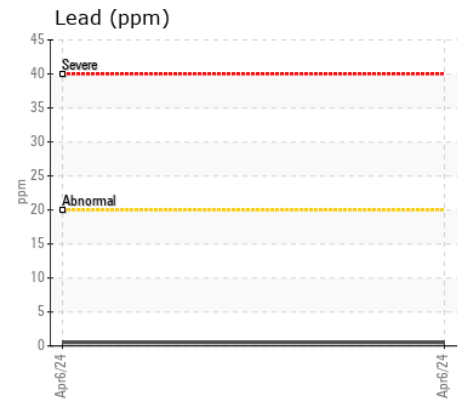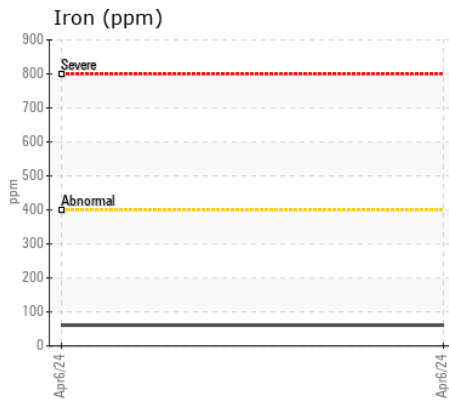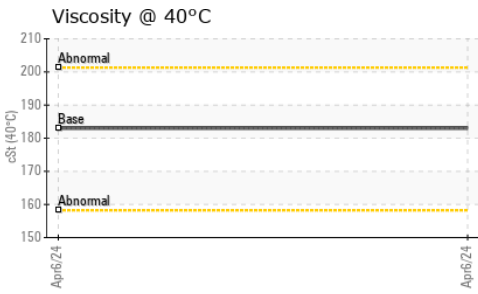

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP452157
Lab Number : 06149050
Unique Number : 10979128
Test Package : MOB 1

Received : 15 Apr 2024
Tested : 16 Apr 2024
Diagnosed : 16 Apr 2024 - Wes Davis

CHADWICK-BAROSS INC
 188 PERRY ROAD
 BANGOR, ME
 US 04401

Contact: TED MENARD
 Ted.Menard@chadwick-baross.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (207)942-4838
 F: (207)941-0856