



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A30G 752484
Component
Drop Box
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0004301	---	---
Sample Date		Client Info		11 Apr 2024	---	---
Machine Age	hrs	Client Info		2465	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	86	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>10	1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	11	---	---
Lead	ppm	ASTM D5185m	>30	<1	---	---
Copper	ppm	ASTM D5185m	>30	3	---	---
Tin	ppm	ASTM D5185m	>20	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	18	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m	111	166	---	---
Barium	ppm	ASTM D5185m	0.0	2	---	---
Molybdenum	ppm	ASTM D5185m	0.9	10	---	---
Manganese	ppm	ASTM D5185m	0.0	3	---	---
Magnesium	ppm	ASTM D5185m	39	5	---	---
Calcium	ppm	ASTM D5185m	93	49	---	---
Phosphorus	ppm	ASTM D5185m	920	2419	---	---
Zinc	ppm	ASTM D5185m	104	45	---	---
Sulfur	ppm	ASTM D5185m	20179	30600	---	---
Visc @ 40°C	cSt	ASTM D445	333	46.2	---	---

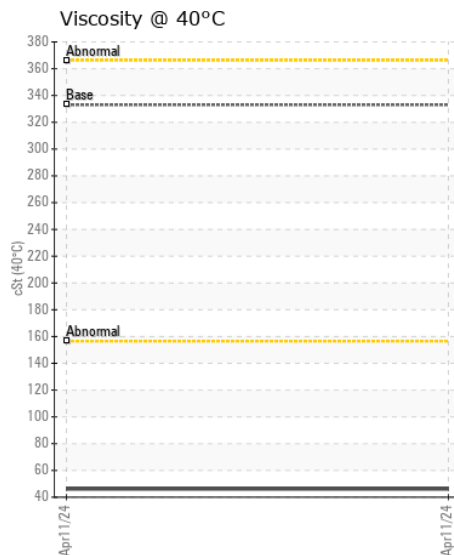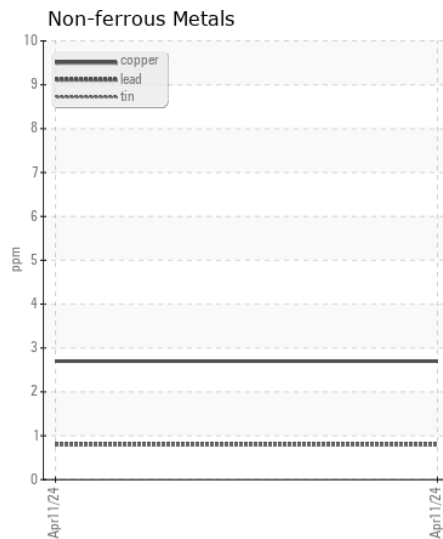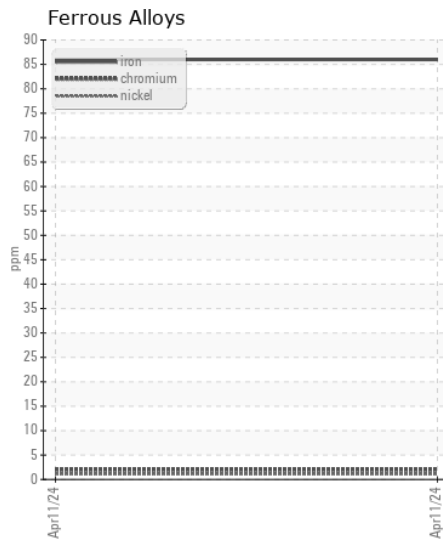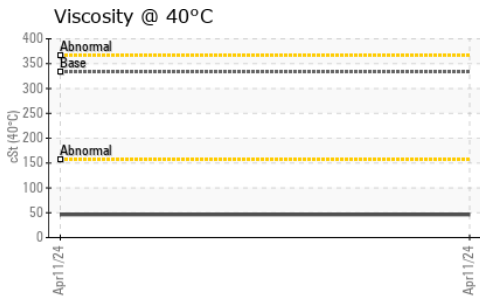

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0004301
Lab Number : 06149076
Unique Number : 10979154
Test Package : CONST

Received : 15 Apr 2024
Tested : 16 Apr 2024
Diagnosed : 17 Apr 2024 - Sean Felton

520 - ASCENDUM MACHINERY INC - KNOXVILLE
 5730 RUTLEDGE PIKE
 KNOXVILLE, TN
 US 37924

Contact: BRANDON GRANT
 brandon.grant@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (865)525-1845
 F: (865)525-0251