



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(C0804129) {UNASSIGNED}
Machine Id
834023
Component
Transmission (Auto)
Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0115694	GFL0112332	GFL0112327
Sample Date		Client Info		12 Apr 2024	08 Mar 2024	14 Feb 2024
Machine Age	hrs	Client Info		1902	1756	1629
Oil Age	hrs	Client Info		1893	1756	1629
Filter Age	hrs	Client Info		1893	1756	1629
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>325	88	95	94
Chromium	ppm	ASTM D5185m	>2	0	0	<1
Nickel	ppm	ASTM D5185m	>2	0	0	1
Titanium	ppm	ASTM D5185m	>3	0	0	<1
Silver	ppm	ASTM D5185m	>5	0	0	<1
Aluminum	ppm	ASTM D5185m	>75	36	37	37
Lead	ppm	ASTM D5185m	>40	65	65	54
Copper	ppm	ASTM D5185m	>50	28	28	30
Tin	ppm	ASTM D5185m	>10	<1	3	4
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	17	20	21
Potassium	ppm	ASTM D5185m	>20	2	4	6
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	▲ MODER
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		10	8	4
Boron	ppm	ASTM D5185m		40	40	45
Barium	ppm	ASTM D5185m		<1	<1	0
Molybdenum	ppm	ASTM D5185m		0	0	1
Manganese	ppm	ASTM D5185m		2	2	3
Magnesium	ppm	ASTM D5185m		0	<1	1
Calcium	ppm	ASTM D5185m		108	120	119
Phosphorus	ppm	ASTM D5185m		172	201	182
Zinc	ppm	ASTM D5185m		22	21	30
Sulfur	ppm	ASTM D5185m		1453	1662	1746
Visc @ 40°C	cSt	ASTM D445	34	32.4	32.5	32.6

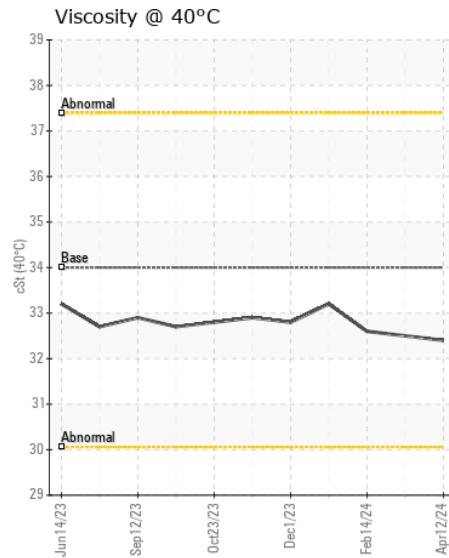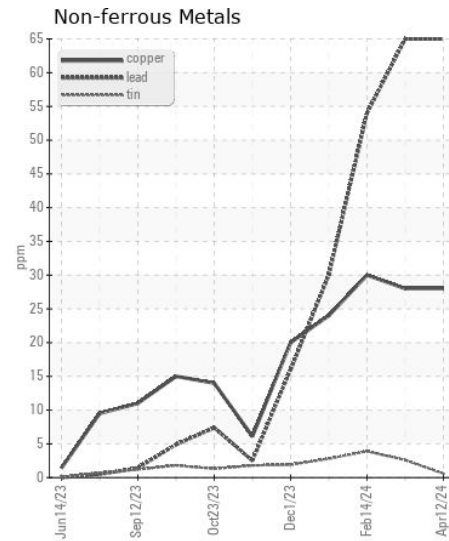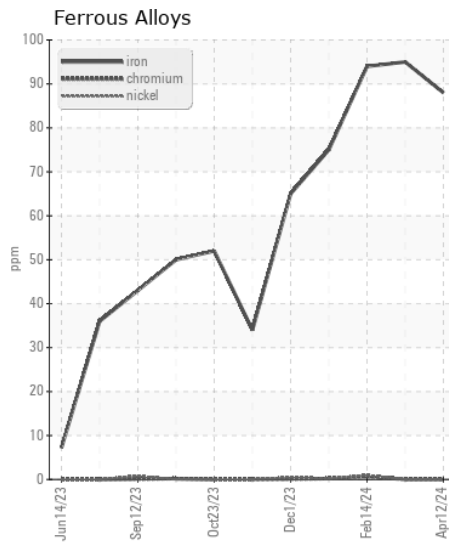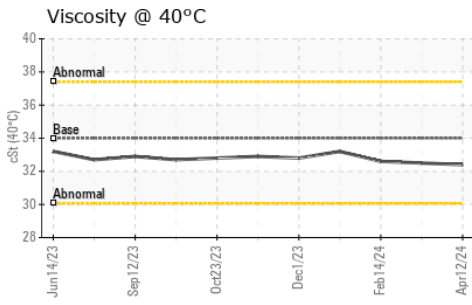

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0115694
Lab Number : 06149172
Unique Number : 10979250
Test Package : FLEET

Received : 15 Apr 2024
Tested : 16 Apr 2024
Diagnosed : 17 Apr 2024 - Wes Davis

GFL Environmental - 010 - Stockbridge
 1280 Rum Creek Parkway
 Stockbridge, GA
 US 30281
 Contact: JOSHUA TINKER
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: