



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
I-564
 Component
Diesel Engine
 Fluid
CHEVRON URSA SUPER PLUS EC 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0921949	---	---
Sample Date		Client Info		15 Apr 2024	---	---
Machine Age	hrs	Client Info		4802	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	56	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>4	2	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	11	---	---
Lead	ppm	ASTM D5185m	>40	2	---	---
Copper	ppm	ASTM D5185m	>330	17	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	17	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	10.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.4	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	---	---
Boron	ppm	ASTM D5185m		229	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		84	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		618	---	---
Calcium	ppm	ASTM D5185m		1638	---	---
Phosphorus	ppm	ASTM D5185m	1200	1187	---	---
Zinc	ppm	ASTM D5185m	1300	1464	---	---
Sulfur	ppm	ASTM D5185m		3863	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	25.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.0	6.5	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	14.8	---	---

FT-IR (Direct Trend)

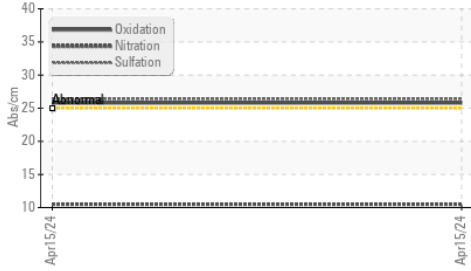


Base Number

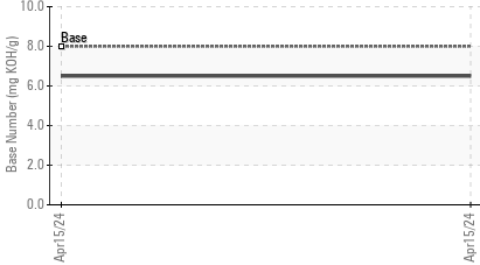


Viscosity @ 100°C




Ferrous Alloys

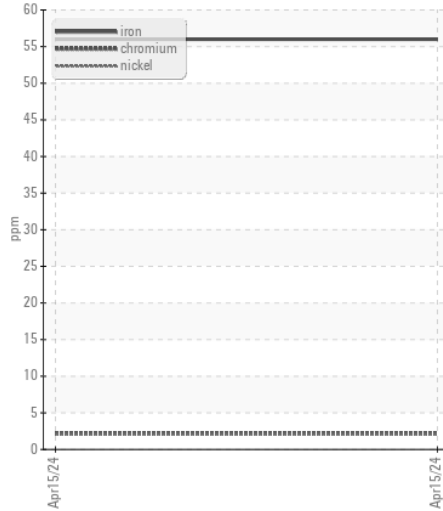


Non-ferrous Metals

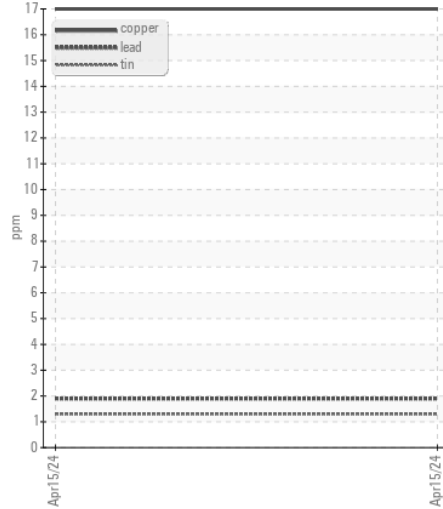

Viscosity @ 100°C

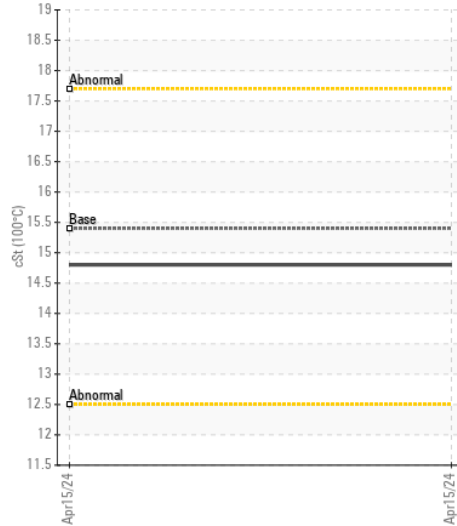

Base Number

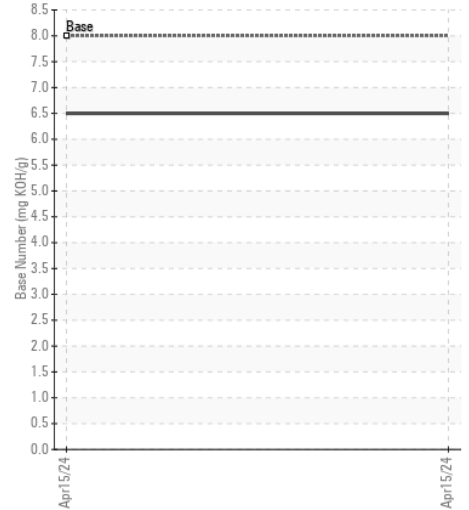

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0921949 **Received** : 15 Apr 2024
Lab Number : 06149346 **Tested** : 16 Apr 2024
Unique Number : 10979424 **Diagnosed** : 17 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

MAY HEAVY EQUIPMENT / National Equipment Dealers
 555 WISE RD
 CLAYTON, NC
 US 27528

Contact: DAN WILLIS
 dwillis@nedealers.com
 T: (919)773-1424
 F: (919)355-0161

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)