



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
2407
 Component
Diesel Engine
 Fluid
ROYAL PURPLE MOTOR OIL 15W40 (--- QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0719850	WC0719896	---
Sample Date		Client Info		25 Mar 2024	21 Nov 2023	---
Machine Age	mls	Client Info		84407	23549	---
Oil Age	mls	Client Info		50000	23549	---
Filter Age	mls	Client Info		50000	23549	---
Oil Changed		Client Info		N/A	Changed	---
Filter Changed		Client Info		N/A	Changed	---
Sample Status				ABNORMAL	ATTENTION	---

WEAR

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	71	35	---
Chromium	ppm	ASTM D5185m	>20	5	2	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	1	---
Aluminum	ppm	ASTM D5185m	>20	41	25	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	▲ 373	149	---
Tin	ppm	ASTM D5185m	>15	2	3	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION









Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185m	>25	9	7	---
Potassium	ppm	ASTM D5185m	>20	98	64	---
Fuel		WC Method	>5	<1.0	0.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	1	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	11.2	7.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.6	23.1	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	6	---
Boron	ppm	ASTM D5185m	0	1	35	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	100	6	39	---
Manganese	ppm	ASTM D5185m		4	4	---
Magnesium	ppm	ASTM D5185m	60	88	497	---
Calcium	ppm	ASTM D5185m	3050	2588	1665	---
Phosphorus	ppm	ASTM D5185m	1050	1013	708	---
Zinc	ppm	ASTM D5185m	1200	1221	868	---
Sulfur	ppm	ASTM D5185m	12500	3391	2013	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.9	21.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	5.4	9.1	---
Visc @ 100°C	cSt	ASTM D445	14.9	12.7	● 9.4	---

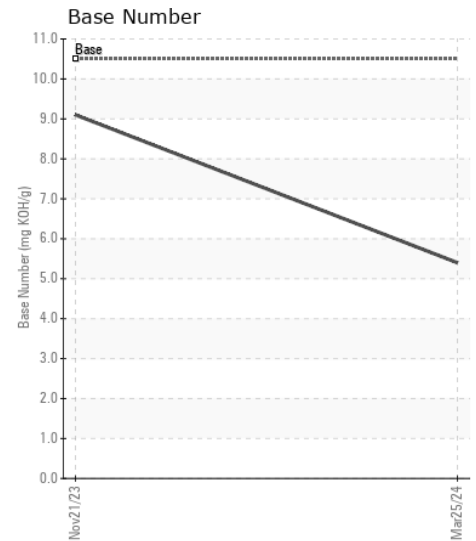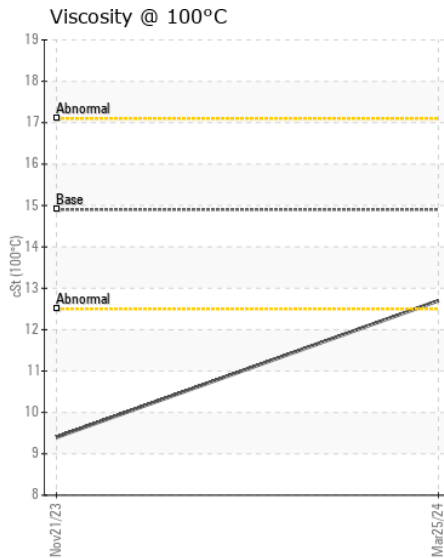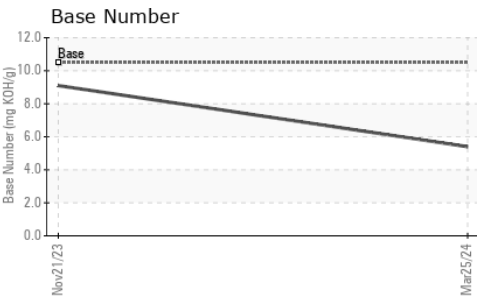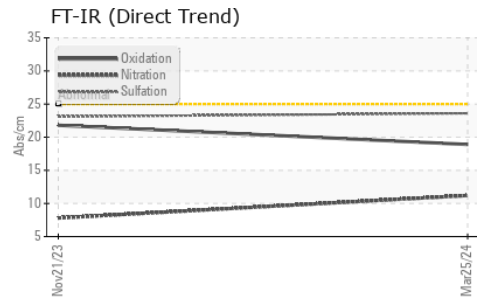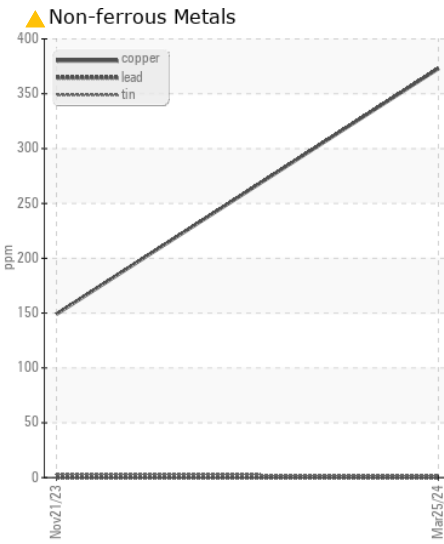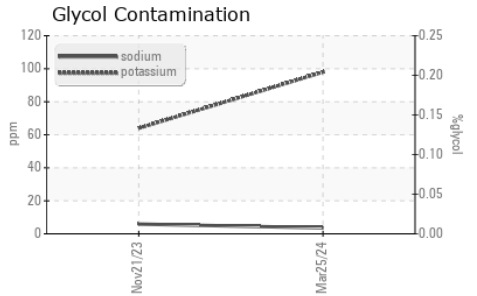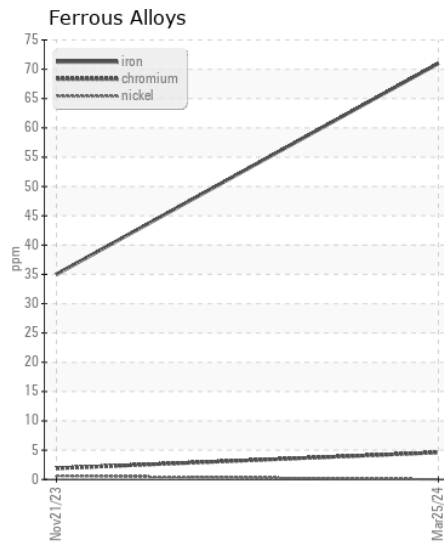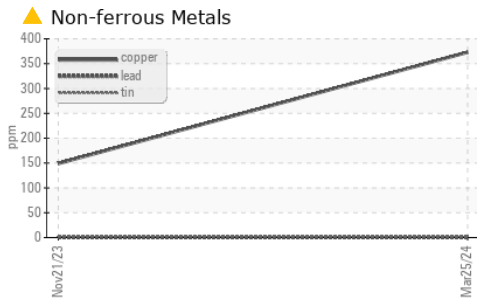

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0719850

Lab Number : 06149448

Unique Number : 10979526

Test Package : FLEET

Received : 15 Apr 2024

Tested : 16 Apr 2024

Diagnosed : 17 Apr 2024 - Don Baldrige

DILLON TRANSPORTATION

4445 NORTH INTERSTATE WAY

KINGMAN, AZ

US 86401

Contact: T LAMOREAUX

t.lamoreaux@dillontransportation.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)