



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W27100 COUNTY OF WAR]
 Machine Id
JOHN DEERE 624K-II 1DW624KHCJF689487
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0210553	JR0184713	JR0170024
Sample Date		Client Info		09 Apr 2024	27 Sep 2023	19 Jul 2023
Machine Age	hrs	Client Info		12301	11433	10925
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	16	16	15
Iron	ppm	ASTM D5185m	>71	11	12	11
Chromium	ppm	ASTM D5185m	>11	4	4	5
Nickel	ppm	ASTM D5185m	>6	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>11	0	<1	<1
Lead	ppm	ASTM D5185m	>13	0	0	0
Copper	ppm	ASTM D5185m	>21	0	<1	<1
Tin	ppm	ASTM D5185m	>5	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>24	<1	<1	<1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	16429	687	376
Particles >6µm		ASTM D7647	>5000	4590	105	95
Particles >14µm		ASTM D7647	>640	191	11	11
Particles >21µm		ASTM D7647	>160	37	4	4
Particles >38µm		ASTM D7647	>40	1	0	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>23/19/16	21/19/15	17/14/11	16/14/11
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	5	3	3
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		<1	5	3
Calcium	ppm	ASTM D5185m	87	111	116	138
Phosphorus	ppm	ASTM D5185m	727	551	593	670
Zinc	ppm	ASTM D5185m	900	667	792	856
Sulfur	ppm	ASTM D5185m	1500	1482	1561	2001
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.62	0.57	0.62
Visc @ 40°C	cSt	ASTM D445	65	57.8	57.7	57.7

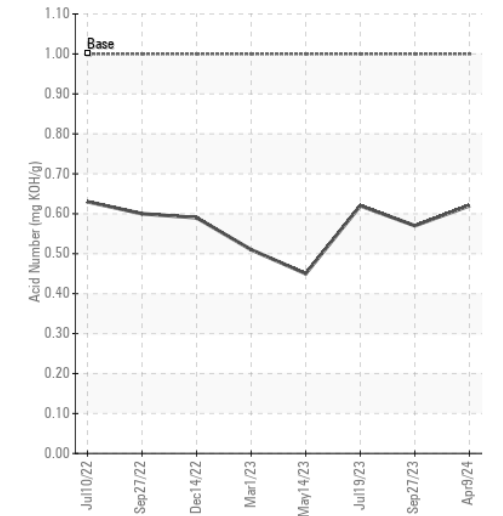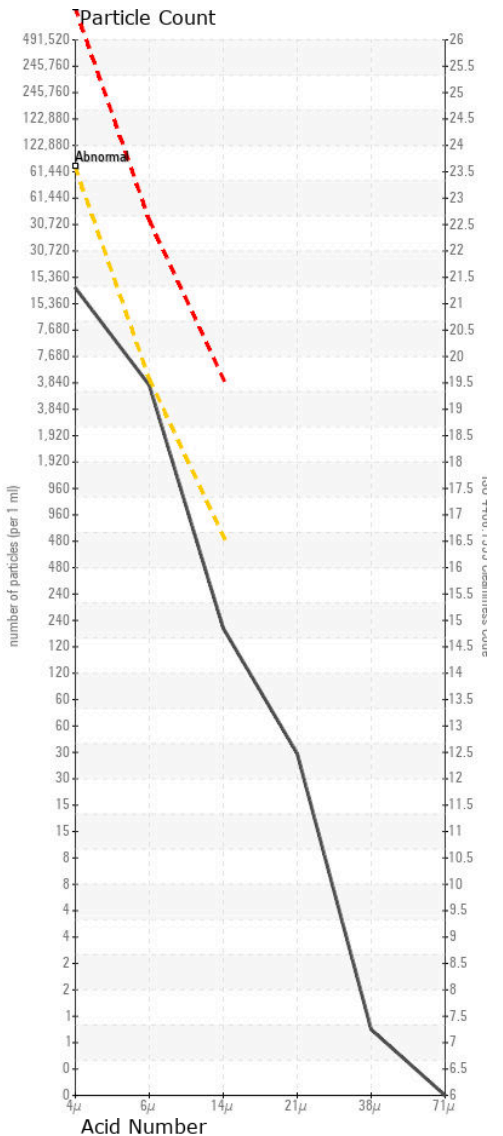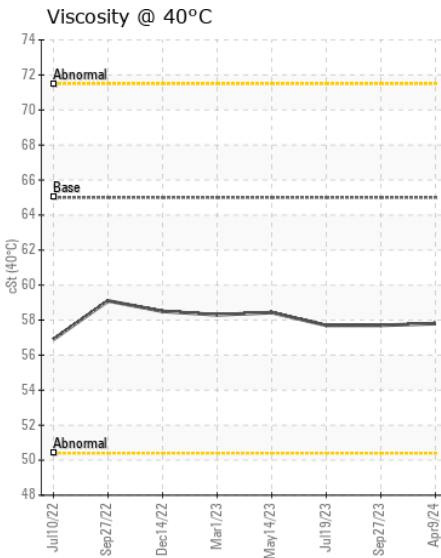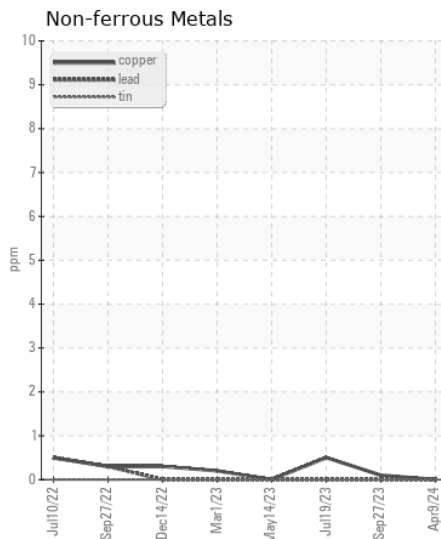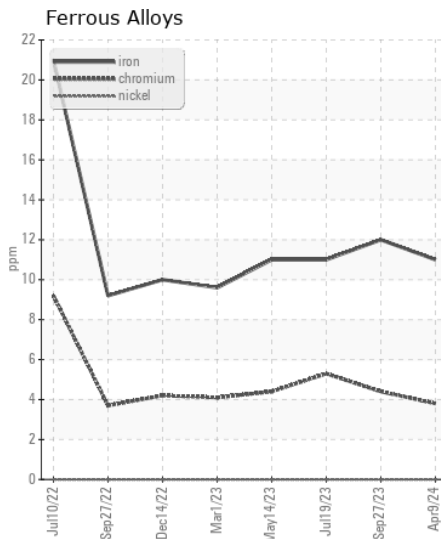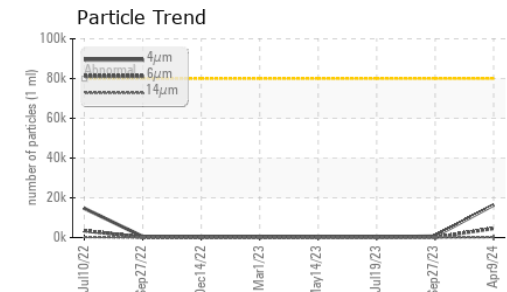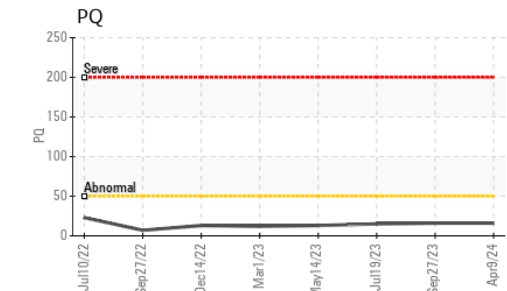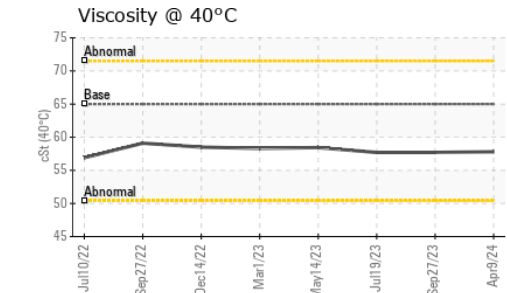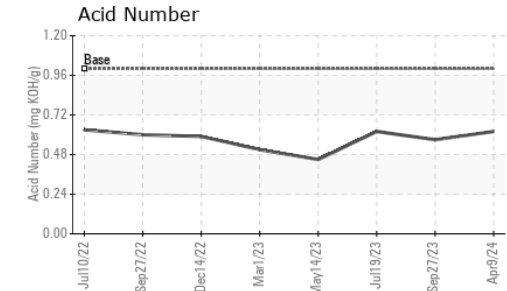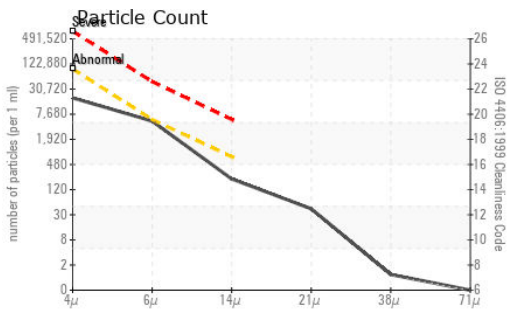

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0210553

Lab Number : 06149483

Unique Number : 10979561

Test Package : CONST (Additional Tests: PQ)

Received : 15 Apr 2024

Tested : 16 Apr 2024

Diagnosed : 16 Apr 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - STEPHENSON

245 YARDMASTER COURT

STEPHENSON, VA

US 22656-1761

Contact: PHIL DAUGHERTY

pdaugherty@jamesriverequipment.com

T: x:

F: (540)693-2588