



PacLease

# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**857-1506**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 SAE 10W30 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0014275</b>	RPL0005579	---
Sample Date		Client Info		<b>07 Mar 2024</b>	26 Jan 2023	---
Machine Age	hrs	Client Info		<b>6106</b>	93638	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>10</b>	22	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	8	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>1</b>	<1	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>7</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	24	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.1</b>	10.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.8</b>	20.7	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	2	---
Boron	ppm	ASTM D5185m		<b>399</b>	51	---
Barium	ppm	ASTM D5185m		<b>1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>82</b>	13	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>421</b>	665	---
Calcium	ppm	ASTM D5185m		<b>1469</b>	1518	---
Phosphorus	ppm	ASTM D5185m	1260	<b>1065</b>	763	---
Zinc	ppm	ASTM D5185m	1400	<b>1239</b>	915	---
Sulfur	ppm	ASTM D5185m		<b>3624</b>	3221	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.9</b>	16.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>7.4</b>	6.8	---
Visc @ 100°C	cSt	ASTM D445	11.1	<b>11.2</b>	11.3	---

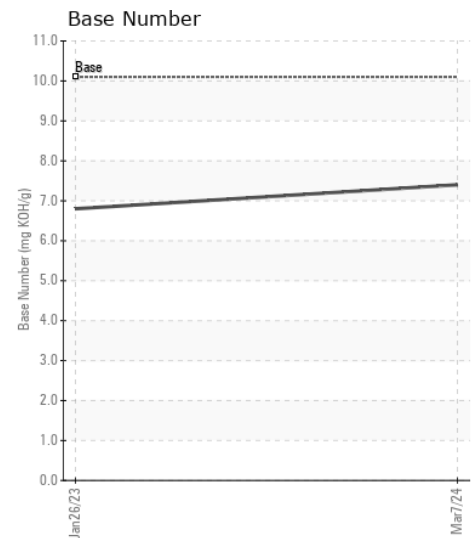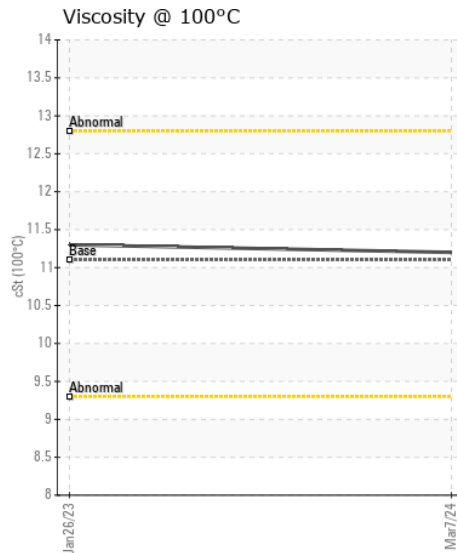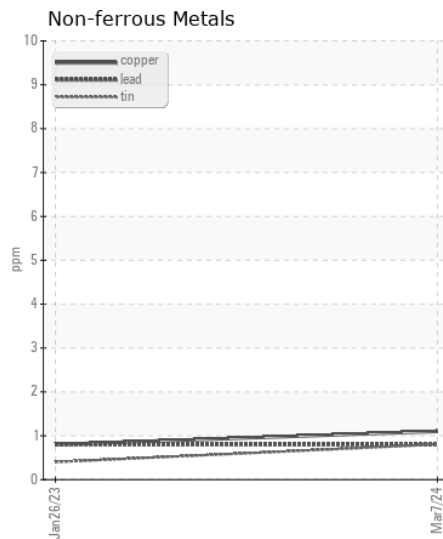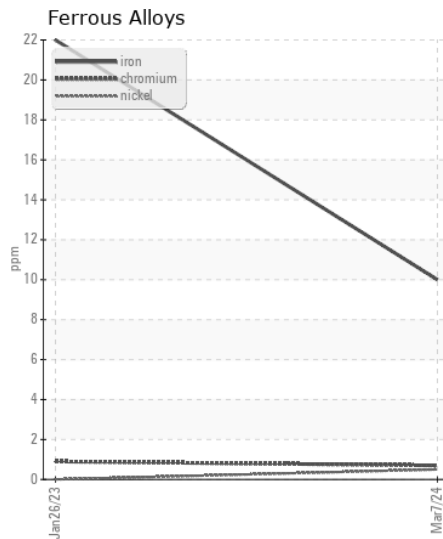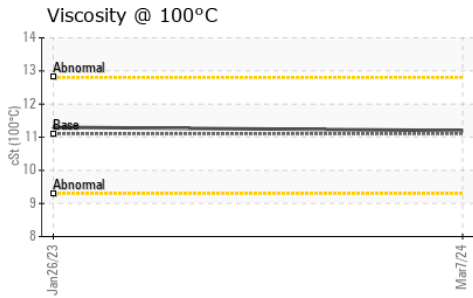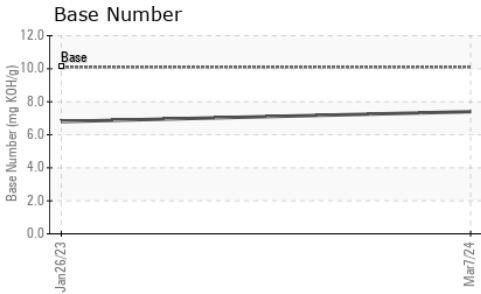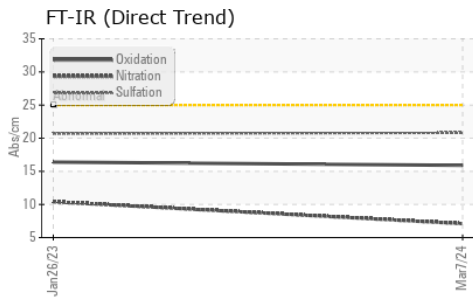

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : RPL0014275

**Lab Number** : 06149814

**Unique Number** : 10979892

**Test Package** : FLEET

**Received** : 16 Apr 2024

**Tested** : 17 Apr 2024

**Diagnosed** : 18 Apr 2024 - Don Baldrige

**RTL PACLEASE - 7001 - Houston**

6300 N. Loop East

Houston, TX

US 77026

Contact: RODNEY BRIGGS

briggsr@rushenterprises.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)