



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**857-4747**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 SAE 10W30 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0014355</b>	RPL0005765	---
Sample Date		Client Info		<b>27 Feb 2024</b>	30 Sep 2022	---
Machine Age	hrs	Client Info		<b>4612</b>	84013	---
Oil Age	hrs	Client Info		<b>821</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>25</b>	32	---
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	1	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>7</b>	16	---
Lead	ppm	ASTM D5185m	>40	<b>3</b>	3	---
Copper	ppm	ASTM D5185m	>330	<b>2</b>	3	---
Tin	ppm	ASTM D5185m	>15	<b>2</b>	2	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>9</b>	12	---
Potassium	ppm	ASTM D5185m	>20	<b>40</b>	30	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	%	*ASTM D2982		<b>0.0</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.8	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.7</b>	11.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.1</b>	25.5	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>11</b>	2	---
Boron	ppm	ASTM D5185m		<b>24</b>	14	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>10</b>	13	---
Manganese	ppm	ASTM D5185m		<b>1</b>	1	---
Magnesium	ppm	ASTM D5185m		<b>729</b>	749	---
Calcium	ppm	ASTM D5185m		<b>1400</b>	1433	---
Phosphorus	ppm	ASTM D5185m	1260	<b>740</b>	712	---
Zinc	ppm	ASTM D5185m	1400	<b>834</b>	834	---
Sulfur	ppm	ASTM D5185m		<b>3330</b>	3617	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.0</b>	19.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>5.1</b>	6.9	---
Visc @ 100°C	cSt	ASTM D445	11.1	<b>11.1</b>	11.7	---

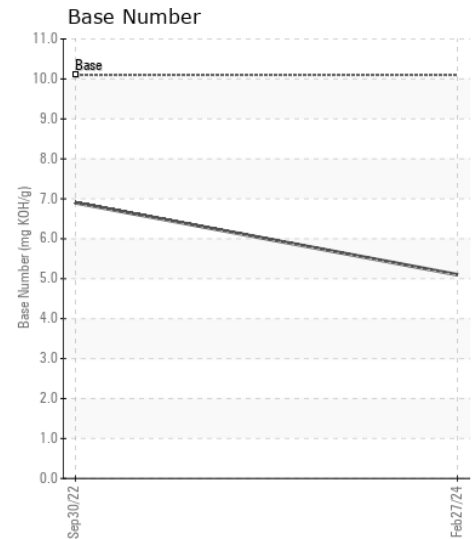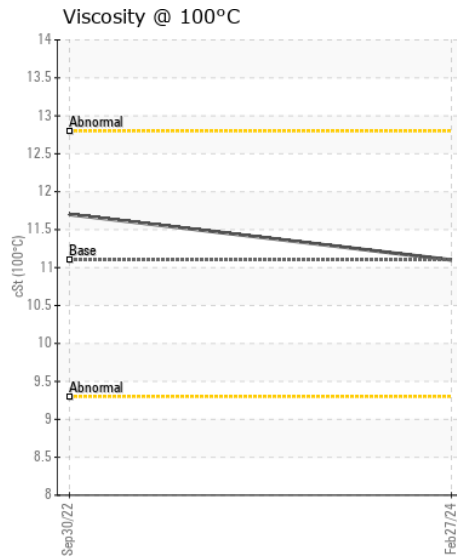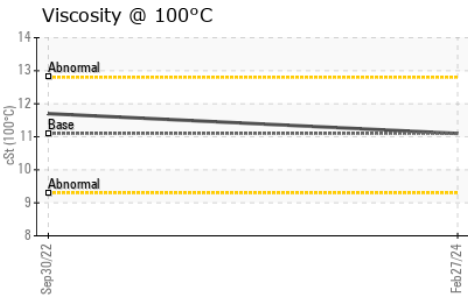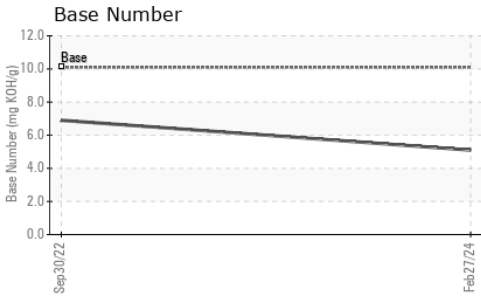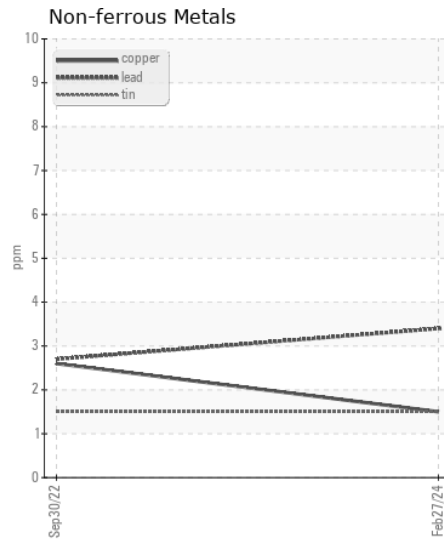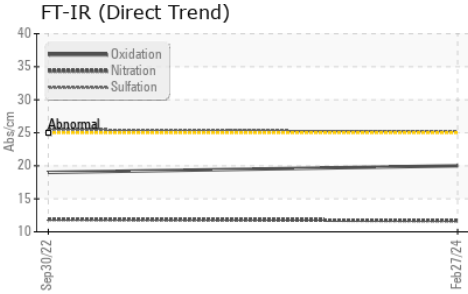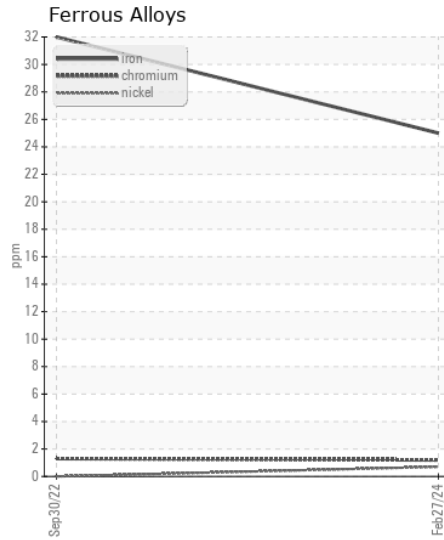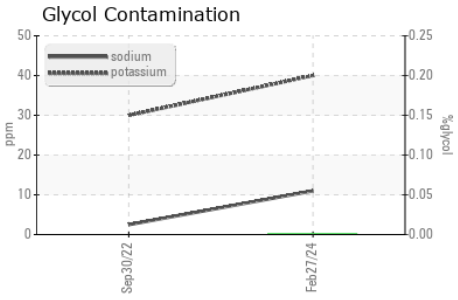

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0014355 **Received** : 16 Apr 2024  
**Lab Number** : 06149907 **Tested** : 17 Apr 2024  
**Unique Number** : 10979985 **Diagnosed** : 17 Apr 2024 - Wes Davis  
**Test Package** : FLEET ( Additional Tests: Glycol )

**RTL PACLEASE - 7001 - Houston**  
 6300 N. Loop East  
 Houston, TX  
 US 77026  
 Contact: RODNEY BRIGGS  
 briggsr@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: