



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO ECR235EL 235E316089
Component
Diesel Engine
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0003081	---	---
Sample Date		Client Info		09 Apr 2024	---	---
Machine Age	hrs	Client Info		646	---	---
Oil Age	hrs	Client Info		646	---	---
Filter Age	hrs	Client Info		646	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	17	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	8	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>20	0	---	---
Copper	ppm	ASTM D5185m	>15	7	---	---
Tin	ppm	ASTM D5185m	>10	3	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	16	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Fuel		WC Method	>6.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.6	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		8	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		13	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		100	---	---
Calcium	ppm	ASTM D5185m		2332	---	---
Phosphorus	ppm	ASTM D5185m		845	---	---
Zinc	ppm	ASTM D5185m		1009	---	---
Sulfur	ppm	ASTM D5185m		4171	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.6	---	---
Visc @ 100°C	cSt	ASTM D445		13.3	---	---


FT-IR (Direct Trend)

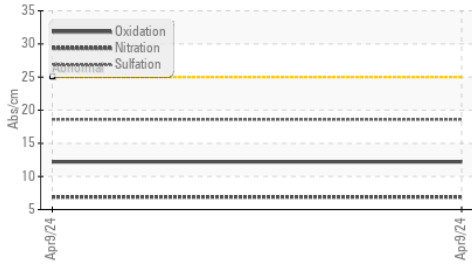


Base Number

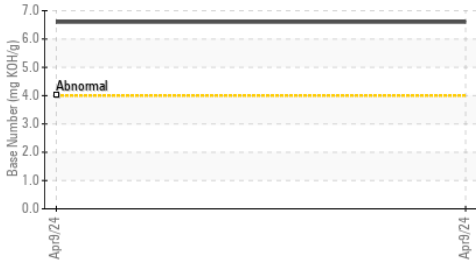


Viscosity @ 100°C

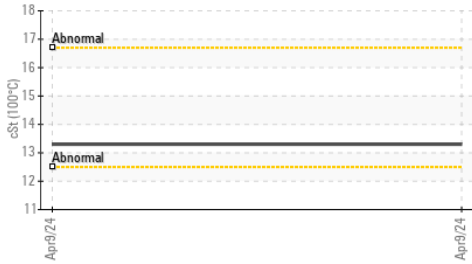


Viscosity @ 40°C

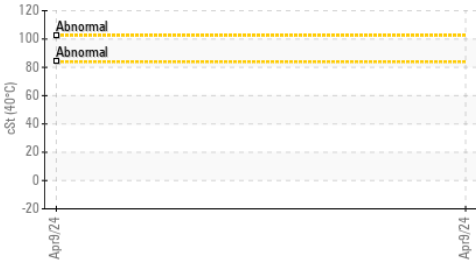


Ferrous Alloys

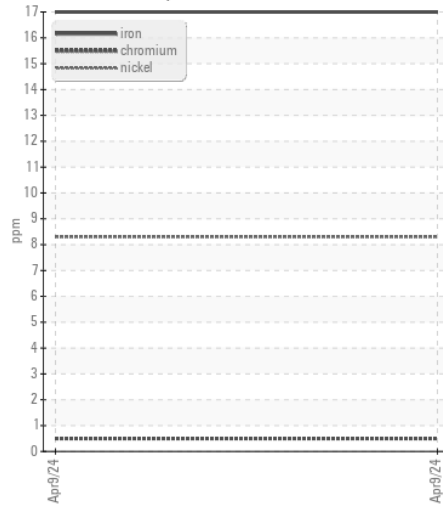


Non-ferrous Metals

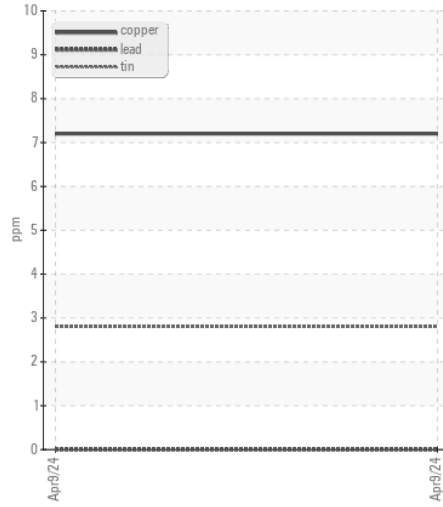

Viscosity @ 100°C

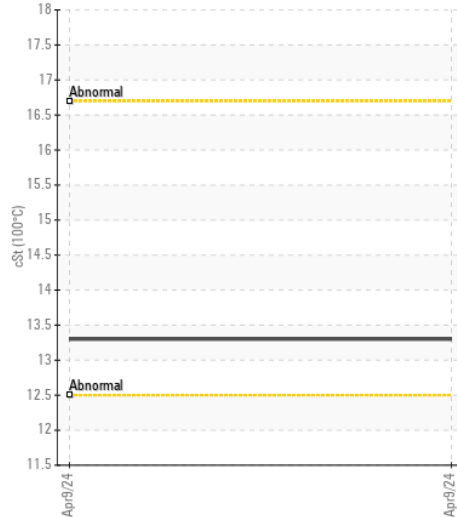

Base Number

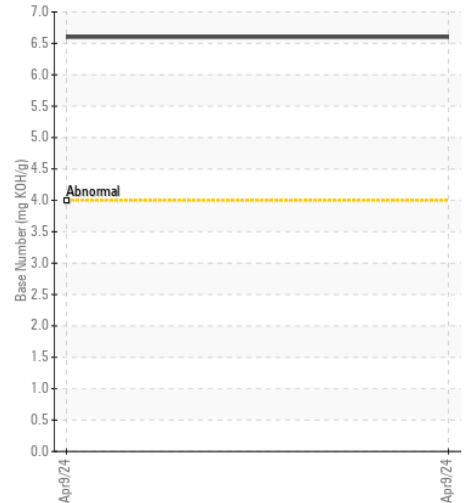

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0003081 **Received** : 16 Apr 2024
Lab Number : 06150150 **Tested** : 18 Apr 2024
Unique Number : 10980228 **Diagnosed** : 18 Apr 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: KV40, TBN)

BLYTHE CONSTRUCTION INC
 2911 N GRAHAM STREET
 CHARLOTTE, NC
 US 28231
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (704)373-2960