



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 410E 1DW410EBKNF715266
Component
Transmission (Auto)
Fluid
JOHN DEERE HD SynTran (17 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0201065	JR0189564	JR0182393
Sample Date		Client Info		12 Apr 2024	19 Oct 2023	10 Aug 2023
Machine Age	hrs	Client Info		3372	2695	2196
Oil Age	hrs	Client Info		2873	499	2196
Filter Age	hrs	Client Info		0	499	0
Oil Changed		Client Info		Not Changed	Not Changed	Changed
Filter Changed		Client Info		Not Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	32	19	23
Iron	ppm	ASTM D5185m	>160	47	36	53
Chromium	ppm	ASTM D5185m	>5	<1	<1	0
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	2	2	<1
Lead	ppm	ASTM D5185m	>50	<1	<1	<1
Copper	ppm	ASTM D5185m	>225	2	2	2
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the fluid.


Silicon	ppm	ASTM D5185m	>20	4	3	4
Potassium	ppm	ASTM D5185m	>20	2	2	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	0	2
Boron	ppm	ASTM D5185m	168	143	137	125
Barium	ppm	ASTM D5185m		2	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	0
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		2	1	0
Calcium	ppm	ASTM D5185m	33	83	76	148
Phosphorus	ppm	ASTM D5185m	330	314	302	266
Zinc	ppm	ASTM D5185m	0	13	0	10
Sulfur	ppm	ASTM D5185m	980	336	352	519
Visc @ 40°C	cSt	ASTM D445	39	37.2	37.0	36.4


Viscosity @ 40°C

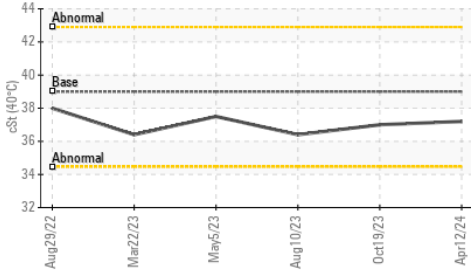


PQ

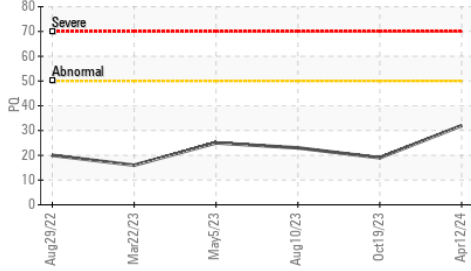


Ferrous Alloys

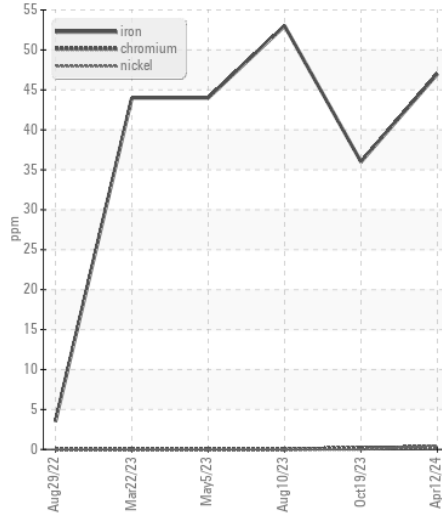


PQ

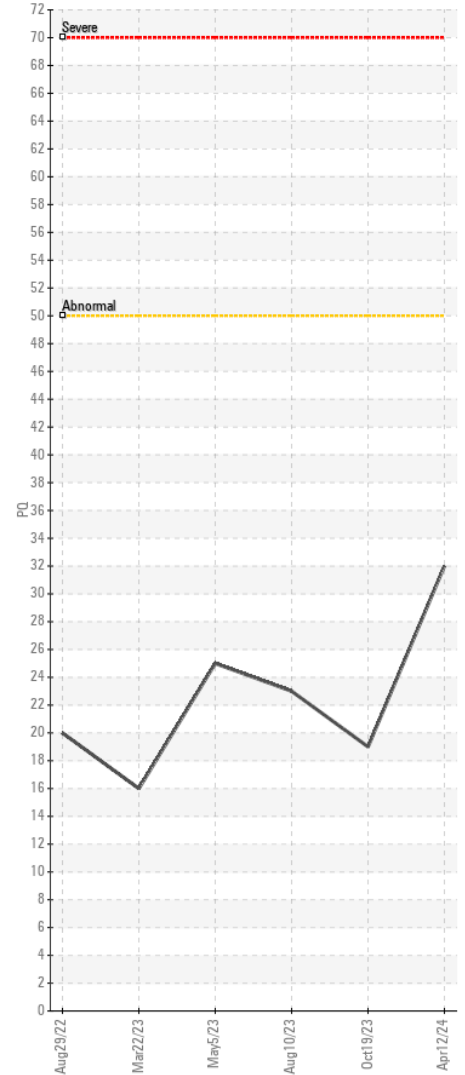

Non-ferrous Metals

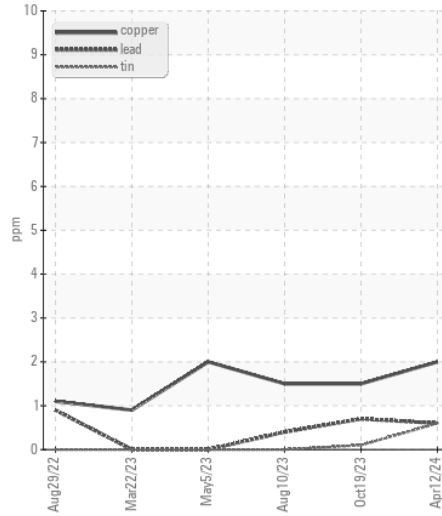

Viscosity @ 40°C

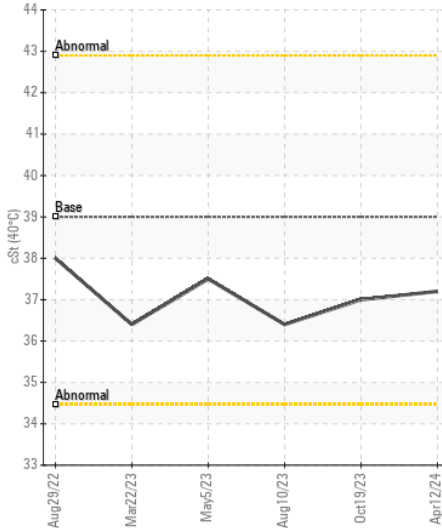

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : JR0201065 Received : 16 Apr 2024
 Lab Number : 06150624 Tested : 17 Apr 2024
 Unique Number : 10980702 Diagnosed : 17 Apr 2024 - Wes Davis
 Test Package : CONST (Additional Tests: PQ)

JRE - NEW BERN
 3816 MARTIN LUTHER KING BLVD
 NEW BERN, NC
 US 28562
 Contact: NEW BERN SHOP

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

nick.etherdridge@jamesriverequipment.com;canastasio@wearcheckusa.com

T:
F: