



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L120H 633400

Component
Transmission (Auto)

Fluid
VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP438996	VCP437222	VCP442186
Sample Date		Client Info		12 Apr 2024	20 Feb 2024	19 Oct 2023
Machine Age	hrs	Client Info		0	2033	1010
Oil Age	hrs	Client Info		0	0	1010
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Not Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	6	15	44
Chromium	ppm	ASTM D5185m	>5	<1	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	0	0	<1
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>225	<1	2	5
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	2	4	10
Potassium	ppm	ASTM D5185m	>20	0	<1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	3	4
Boron	ppm	ASTM D5185m	187	114	89	81
Barium	ppm	ASTM D5185m	0.0	0	0	1
Molybdenum	ppm	ASTM D5185m	0.0	0	0	0
Manganese	ppm	ASTM D5185m	0.0	<1	<1	4
Magnesium	ppm	ASTM D5185m	6.8	0	0	12
Calcium	ppm	ASTM D5185m	215	71	70	79
Phosphorus	ppm	ASTM D5185m	445	210	176	184
Zinc	ppm	ASTM D5185m	56	0	<1	3
Sulfur	ppm	ASTM D5185m	1336	2270	1703	1837
Visc @ 40°C	cSt	ASTM D445	35.3	28.1	28.1	28.6

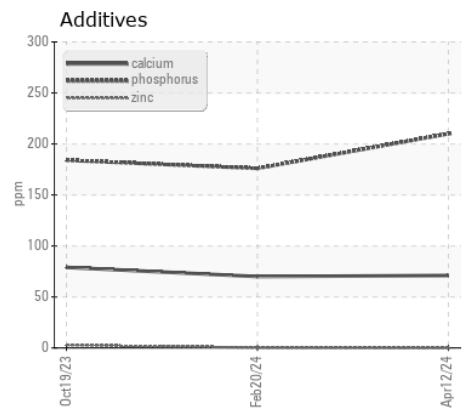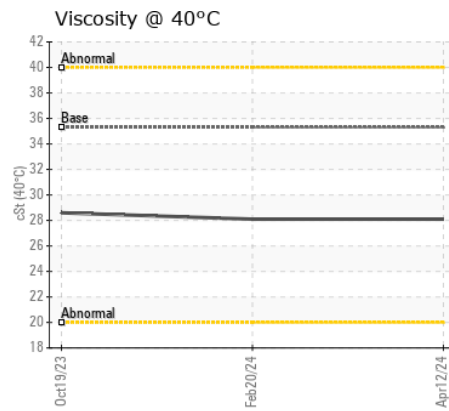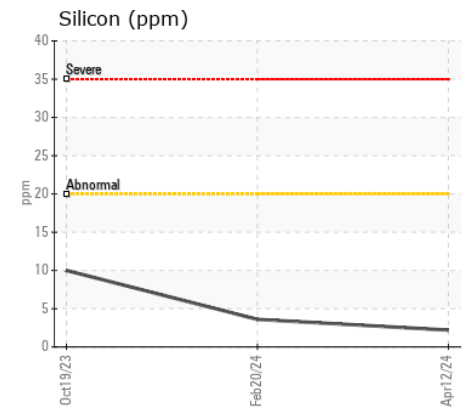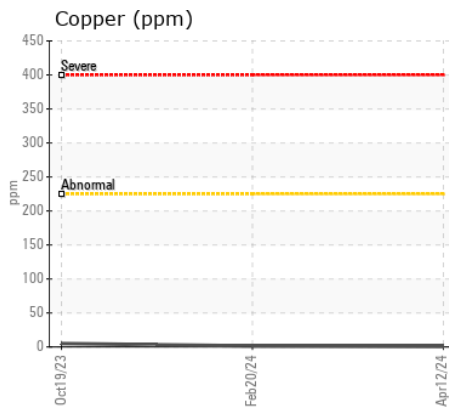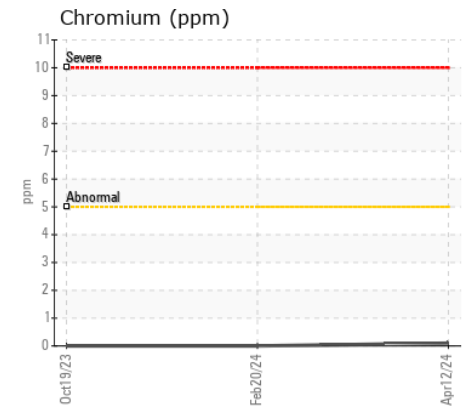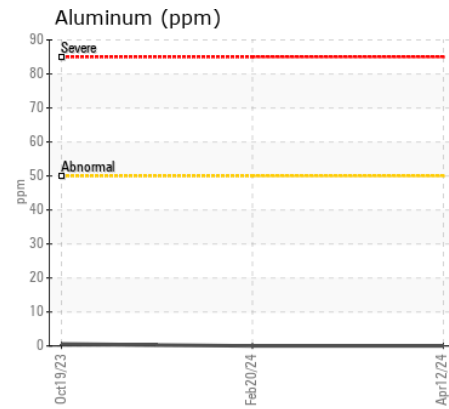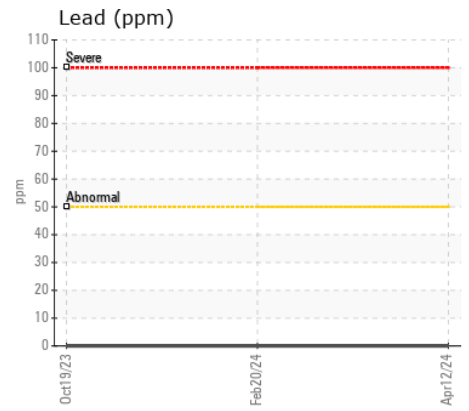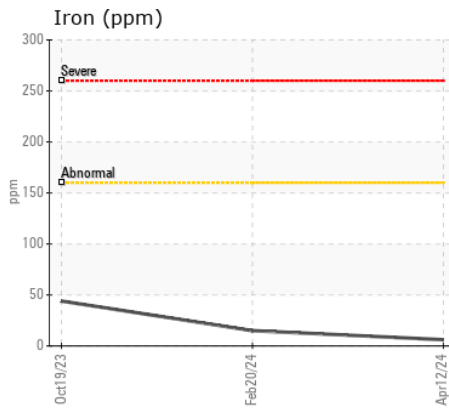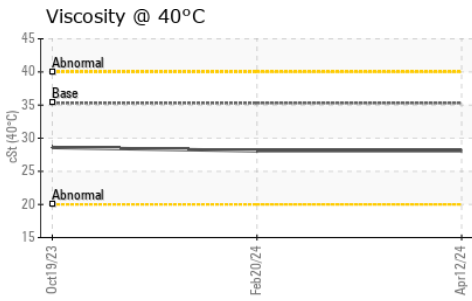

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP438996 **Received** : 16 Apr 2024
Lab Number : 06150822 **Tested** : 17 Apr 2024
Unique Number : 10980900 **Diagnosed** : 18 Apr 2024 - Sean Felton
Test Package : MOB 1

CITY CARTING
 221 OLD GATE LN
 MILFORD, CT
 US 06460
 Contact: TAVINS BANKS
 tavins@citycart.net
 T: (203)223-3885
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)