



|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |



Machine Id  
**2339 MACK GRANITE**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (60 QTS)**

**RECOMMENDATION**

Resample at the next service interval to monitor. ( Customer Sample Comment: This vehicle is a requested re-sample. )

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>GFL0117447</b>  | GFL0103213  | GFL0089359  |
| Sample Date    |     | Client Info |           | <b>15 Apr 2024</b> | 14 Dec 2023 | 14 Aug 2023 |
| Machine Age    | hrs | Client Info |           | <b>44450</b>       | 43696       | 43085       |
| Oil Age        | hrs | Client Info |           | <b>0</b>           | 0           | 0           |
| Filter Age     | hrs | Client Info |           | <b>0</b>           | 0           | 0           |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | Changed     | Changed     |
| Filter Changed |     | Client Info |           | <b>Changed</b>     | N/A         | Changed     |
| Sample Status  |     |             |           | <b>NORMAL</b>      | ABNORMAL    | ABNORMAL    |

**WEAR**

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >120 | <b>22</b>    | 37   | 44   |
| Chromium     | ppm    | ASTM D5185m | >20  | <b>&lt;1</b> | <1   | 1    |
| Nickel       | ppm    | ASTM D5185m | >5   | <b>0</b>     | 0    | 0    |
| Titanium     | ppm    | ASTM D5185m | >2   | <b>0</b>     | 0    | <1   |
| Silver       | ppm    | ASTM D5185m | >2   | <b>0</b>     | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >20  | <b>5</b>     | 1    | 1    |
| Lead         | ppm    | ASTM D5185m | >40  | <b>0</b>     | 0    | 2    |
| Copper       | ppm    | ASTM D5185m | >330 | <b>0</b>     | 4    | 3    |
| Tin          | ppm    | ASTM D5185m | >15  | <b>&lt;1</b> | <1   | <1   |
| Vanadium     | ppm    | ASTM D5185m |      | <b>0</b>     | 0    | <1   |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

**CONTAMINATION**








There is no indication of any contamination in the oil.

|                  |          |             |       |                |       |       |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >25   | <b>5</b>       | 3     | 4     |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>3</b>       | <1    | 3     |
| Fuel             |          | WC Method   | >3.0  | <b>&lt;1.0</b> | <1.0  | <1.0  |
| Water            |          | WC Method   | >0.2  | <b>NEG</b>     | NEG   | NEG   |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 | >4    | <b>1</b>       | 3.9   | 3.9   |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>8.8</b>     | 8.7   | 9.7   |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>20.0</b>    | 24.8  | 25.1  |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.2  | <b>NEG</b>     | NEG   | NEG   |

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |      |             |       |       |
|------------------|----------|-------------|------|-------------|-------|-------|
| Sodium           | ppm      | ASTM D5185m |      | <b>2</b>    | 0     | 2     |
| Boron            | ppm      | ASTM D5185m | 0    | <b>2</b>    | 3     | <1    |
| Barium           | ppm      | ASTM D5185m | 0    | <b>0</b>    | 0     | 0     |
| Molybdenum       | ppm      | ASTM D5185m | 60   | <b>59</b>   | 53    | 57    |
| Manganese        | ppm      | ASTM D5185m | 0    | <b>0</b>    | <1    | <1    |
| Magnesium        | ppm      | ASTM D5185m | 1010 | <b>959</b>  | 885   | 931   |
| Calcium          | ppm      | ASTM D5185m | 1070 | <b>1071</b> | 991   | 1085  |
| Phosphorus       | ppm      | ASTM D5185m | 1150 | <b>1046</b> | 909   | 975   |
| Zinc             | ppm      | ASTM D5185m | 1270 | <b>1258</b> | 1174  | 1200  |
| Sulfur           | ppm      | ASTM D5185m | 2060 | <b>3329</b> | 2725  | 3394  |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>15.5</b> | 11.9  | 15.2  |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 9.8  | <b>8.2</b>  | ▲ 0.0 | ▲ 1.0 |
| Visc @ 100°C     | cSt      | ASTM D445   | 15.4 | <b>13.7</b> | 14.4  | 14.7  |

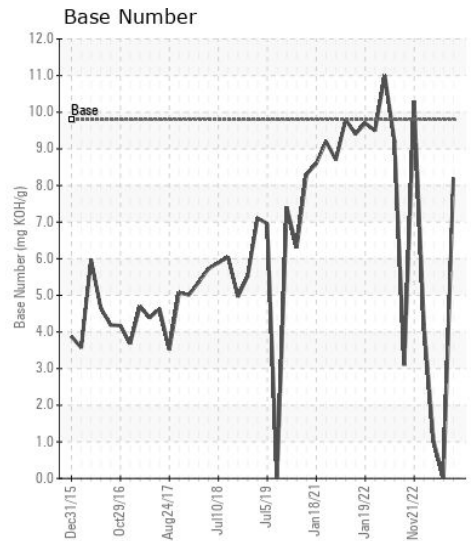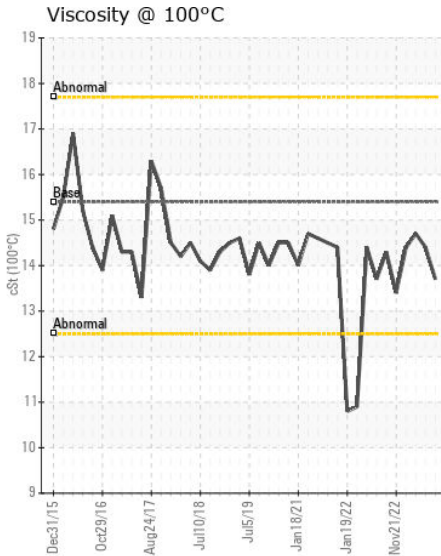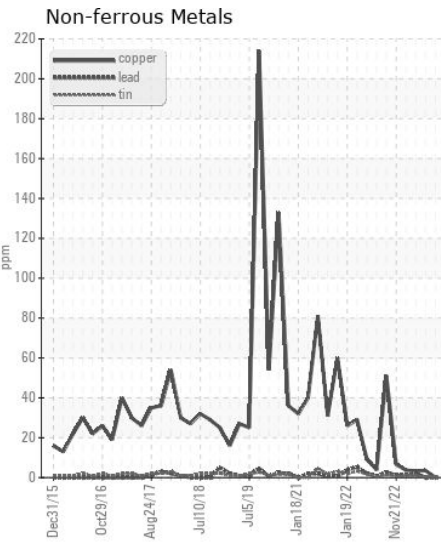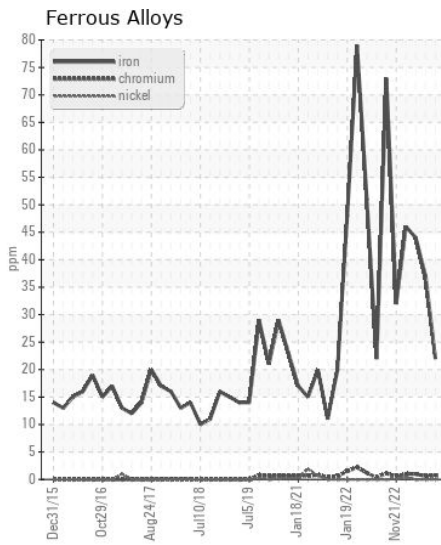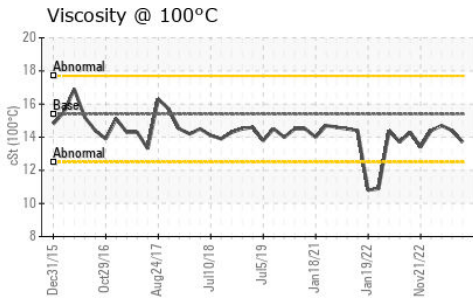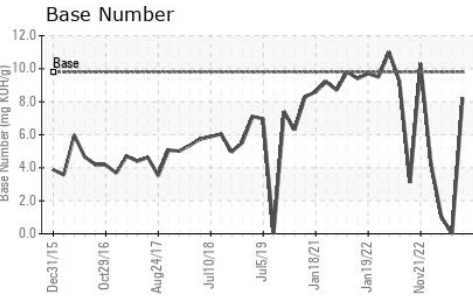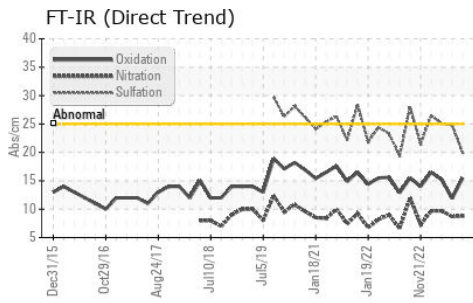

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0117447  
**Lab Number** : 06151689  
**Unique Number** : 10981767  
**Test Package** : FLEET

**GFL Environmental - 001 - Raleigh(CNG)**  
 3741 Conquest Drive  
 Garner, NC  
 US 27529  
 Contact: Craig Johnson  
 craig.johnson@gflenv.com  
 T: (919)662-7100  
 F: (919)662-7130

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)