



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 344P 077050
 Component
Front Differential
 Fluid
GEAR OIL SAE 80W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0213557	---	---
Sample Date		Client Info		16 Apr 2024	---	---
Machine Age	hrs	Client Info		404	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		78	---	---
Iron	ppm	ASTM D5185m	>500	67	---	---
Chromium	ppm	ASTM D5185m	>10	2	---	---
Nickel	ppm	ASTM D5185m	>10	1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>25	1	---	---
Lead	ppm	ASTM D5185m	>25	1	---	---
Copper	ppm	ASTM D5185m	>100	1	---	---
Tin	ppm	ASTM D5185m	>10	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	27	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	6	---	---
Boron	ppm	ASTM D5185m	400	<1	---	---
Barium	ppm	ASTM D5185m	200	3	---	---
Molybdenum	ppm	ASTM D5185m	12	2	---	---
Manganese	ppm	ASTM D5185m		8	---	---
Magnesium	ppm	ASTM D5185m	12	3	---	---
Calcium	ppm	ASTM D5185m	150	22	---	---
Phosphorus	ppm	ASTM D5185m	1650	2372	---	---
Zinc	ppm	ASTM D5185m	125	26	---	---
Sulfur	ppm	ASTM D5185m	22500	30581	---	---
Visc @ 40°C	cSt	ASTM D445	143	192	---	---

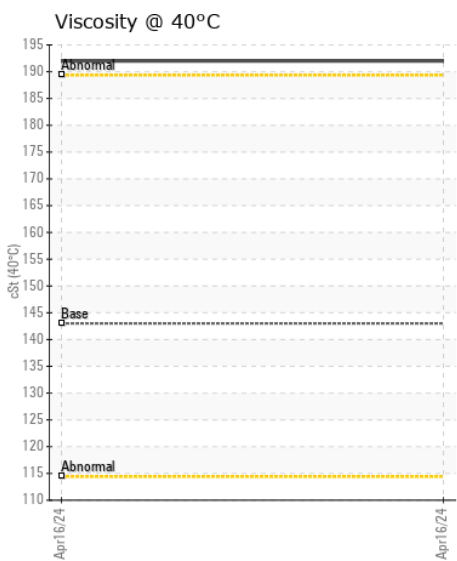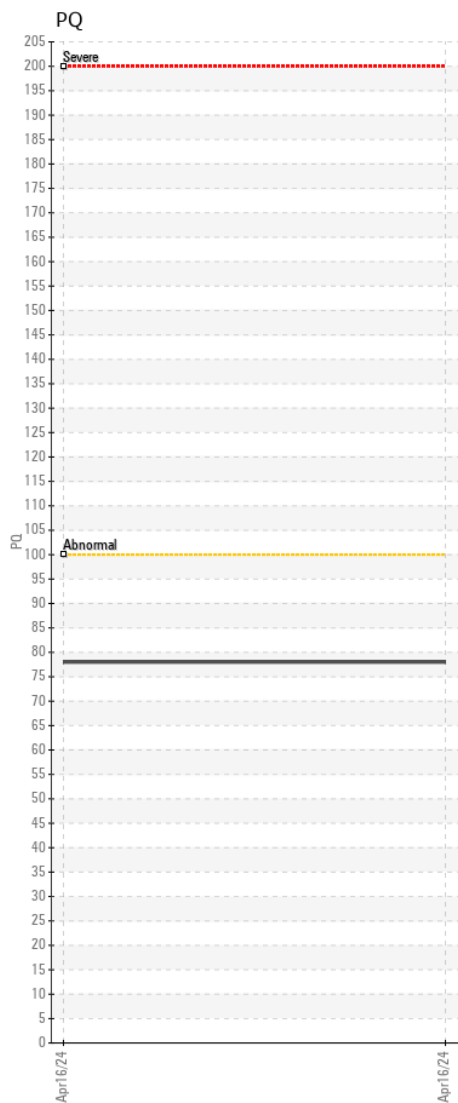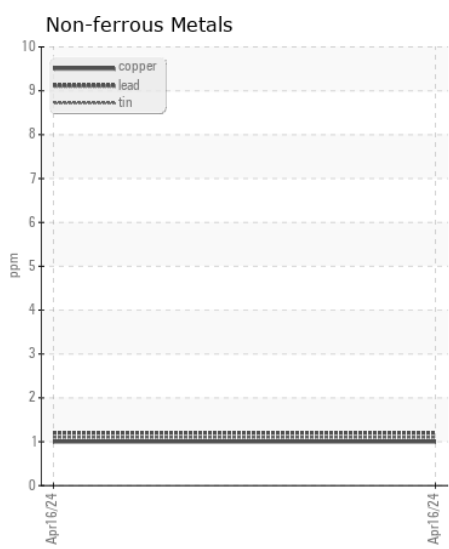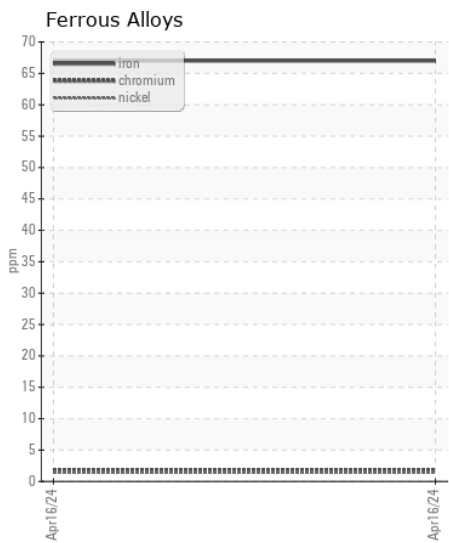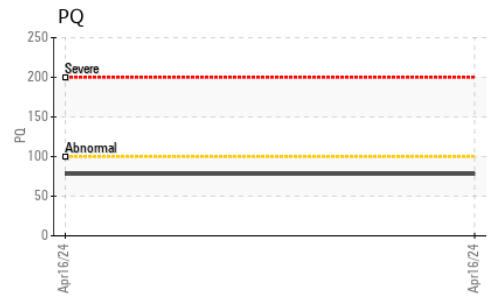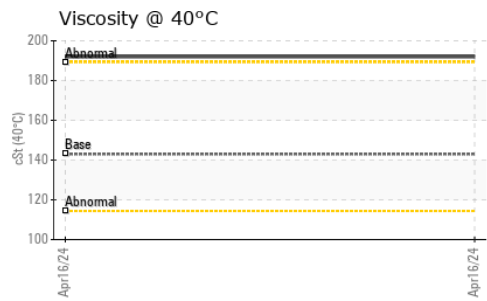

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0213557 **Received** : 17 Apr 2024
Lab Number : 06152282 **Tested** : 19 Apr 2024
Unique Number : 10982360 **Diagnosed** : 19 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409
 Contact: NICK GALLAHER
 NGALLAHER@JRENET.COM
 T: (336)668-2762
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)