



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
MILES MADISON
Component
Port Reduction Gear
Fluid
CHEVRON DELO 400 LE 15W40 (35 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0057781	MW0057871	MW0057892
Sample Date		Client Info		05 Apr 2024	13 Mar 2024	20 Dec 2023
Machine Age	hrs	Client Info		924	437	64684
Oil Age	hrs	Client Info		901	4737	960
Filter Age	hrs	Client Info		464	4737	263
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	8	8	2
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		16	16	15
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	1	1
Lead	ppm	ASTM D5185m	>100	0	<1	1
Copper	ppm	ASTM D5185m	>50	4	3	2
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	13	13	3
Potassium	ppm	ASTM D5185m	>20	2	3	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	5	4
Boron	ppm	ASTM D5185m		129	126	119
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		30	30	32
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		712	714	755
Calcium	ppm	ASTM D5185m		1493	1463	1533
Phosphorus	ppm	ASTM D5185m	1200	762	758	744
Zinc	ppm	ASTM D5185m	1300	785	785	819
Sulfur	ppm	ASTM D5185m	3200	3642	3683	3136
Acid Number (AN)	mg KOH/g	ASTM D8045		1.65	1.60	1.27
Visc @ 40°C	cSt	ASTM D445	125	74.5	76.8	75.0

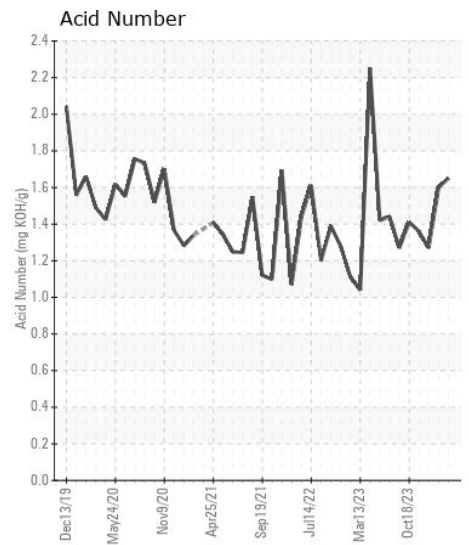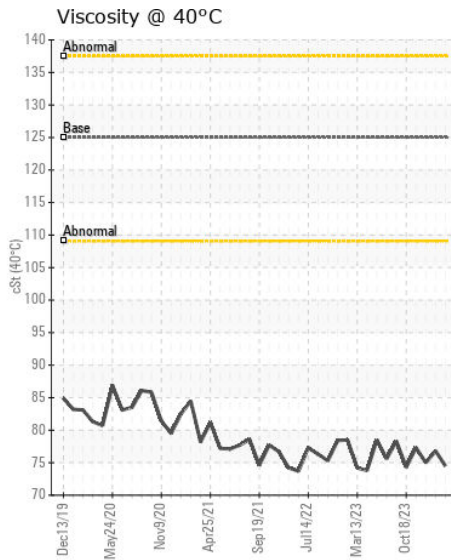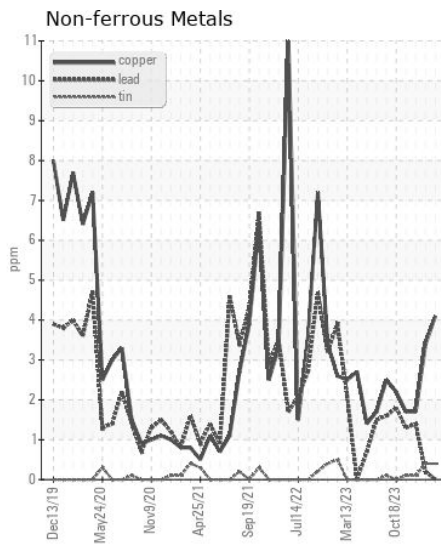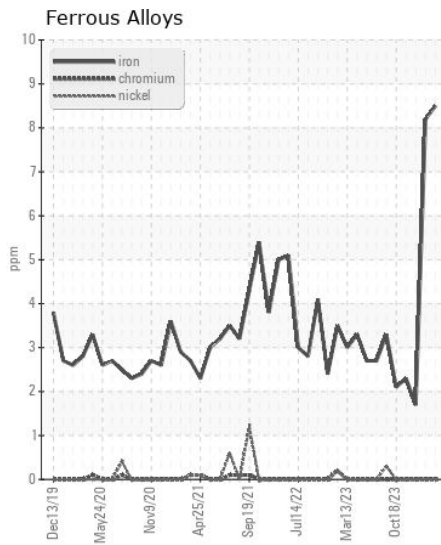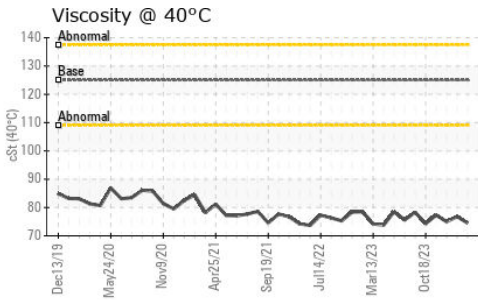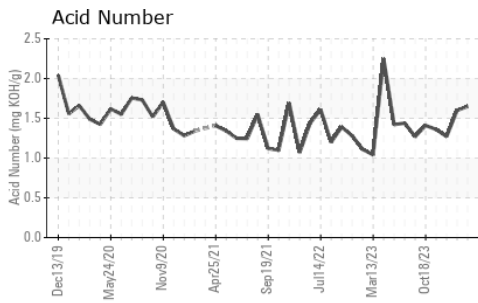

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0057781
Lab Number : 06152650
Unique Number : 10982728
Test Package : MAR 2

Received : 17 Apr 2024
Tested : 18 Apr 2024
Diagnosed : 22 Apr 2024 - Sean Felton

MAGNOLIA MARINE TRANSPORT
 697 HAINING ROAD
 VICKSBURG, MS
 US 39183
 Contact: MMT MAINTENANCE PLANNERS
 mmtmaintenanceplanners@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:
 F: (601)638-8028