



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 624P RT6635 (S/N 1DW624PAAMLZ12946)

Component
Transmission (Manual)

Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0035671	---	---
Sample Date		Client Info		16 Apr 2024	---	---
Machine Age	hrs	Client Info		850	---	---
Oil Age	hrs	Client Info		850	---	---
Filter Age	hrs	Client Info		350	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	17	---	---
Chromium	ppm	ASTM D5185m	>5	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>7	<1	---	---
Aluminum	ppm	ASTM D5185m	>25	<1	---	---
Lead	ppm	ASTM D5185m	>45	0	---	---
Copper	ppm	ASTM D5185m	>225	7	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	35	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		29	---	---
Boron	ppm	ASTM D5185m	6	<1	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	0	<1	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m	145	86	---	---
Calcium	ppm	ASTM D5185m	3570	3143	---	---
Phosphorus	ppm	ASTM D5185m	1290	1042	---	---
Zinc	ppm	ASTM D5185m	1640	1178	---	---
Sulfur	ppm	ASTM D5185m		3915	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.8	1.44	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	44.2	---	---

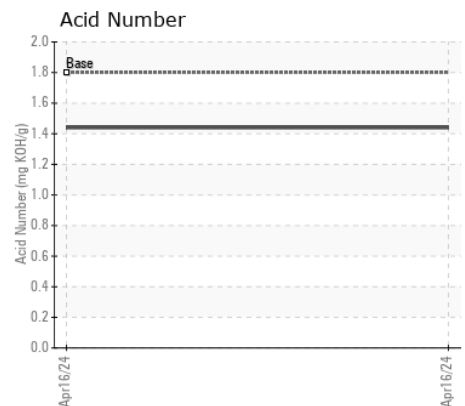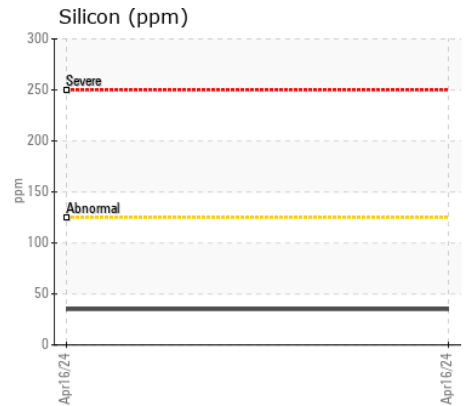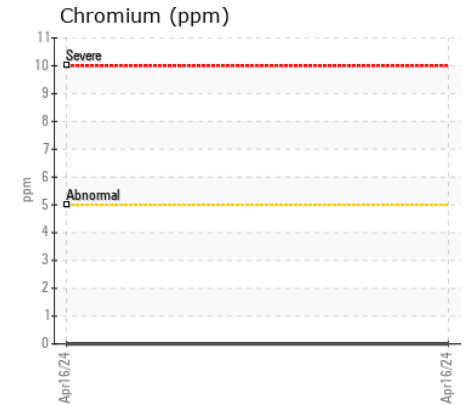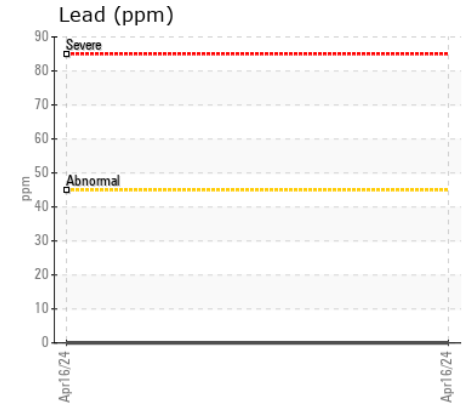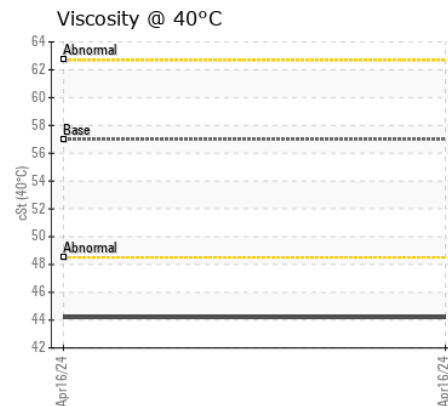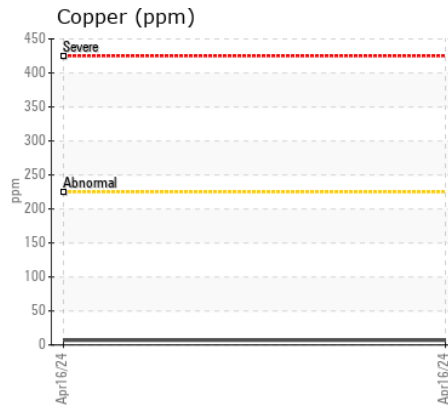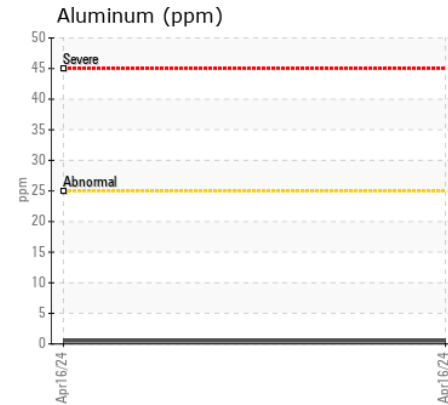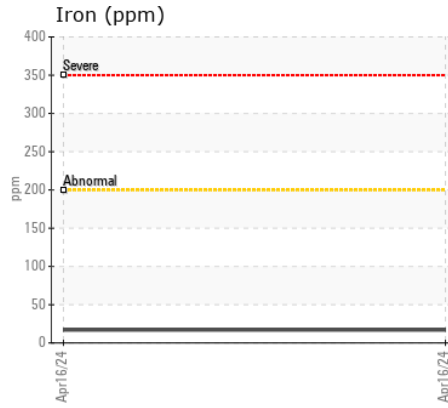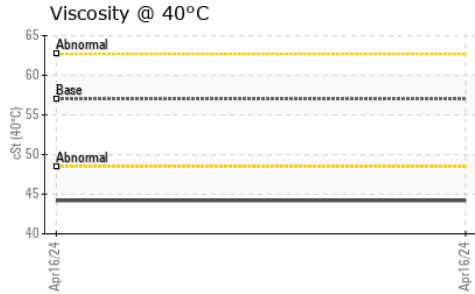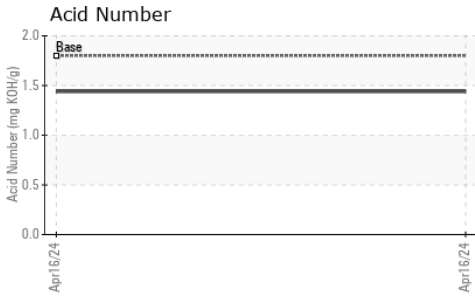

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0035671
Lab Number : 06152657
Unique Number : 10982735
Test Package : MOB 2
Received : 17 Apr 2024
Tested : 22 Apr 2024
Diagnosed : 22 Apr 2024 - Sean Felton

COMER CONSTRUCTION
 2100 SLADE LANE
 FOREST HILL, MD
 US 21050
 Contact: DONALD FOX
 dfox@comerconstruction.com
 T: (443)269-1379
 F: (410)638-0289

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)