



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[05W46075]

Machine Id

CATERPILLAR 950GC C276161 (S/N CAT00950JM5T05442)

Component

Hydraulic System

Fluid

CAT HYDO (160 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0211356	JR0203112	JR0195886
Sample Date		Client Info		17 Apr 2024	15 Feb 2024	30 Nov 2023
Machine Age	hrs	Client Info		3482	3016	2492
Oil Age	hrs	Client Info		3482	3016	2492
Filter Age	hrs	Client Info		466	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	4	3	1
Chromium	ppm	ASTM D5185m	>10	2	1	1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	1	0
Copper	ppm	ASTM D5185m	>75	4	4	4
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	2	2	1
Potassium	ppm	ASTM D5185m	>20	1	<1	0
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	492	2657	573
Particles >6µm		ASTM D7647	>1300	79	1049	133
Particles >14µm		ASTM D7647	>160	5	108	13
Particles >21µm		ASTM D7647	>40	2	19	4
Particles >38µm		ASTM D7647	>10	0	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	16/13/10	19/17/14	16/14/11
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	3	2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		7	8	7
Calcium	ppm	ASTM D5185m		390	382	183
Phosphorus	ppm	ASTM D5185m	1100	755	651	720
Zinc	ppm	ASTM D5185m	1210	912	876	918
Sulfur	ppm	ASTM D5185m		2329	1850	1795
Acid Number (AN)	mg KOH/g	ASTM D8045		0.78	0.70	0.62
Visc @ 40°C	cSt	ASTM D445	37.9	40.7	40.8	40.7

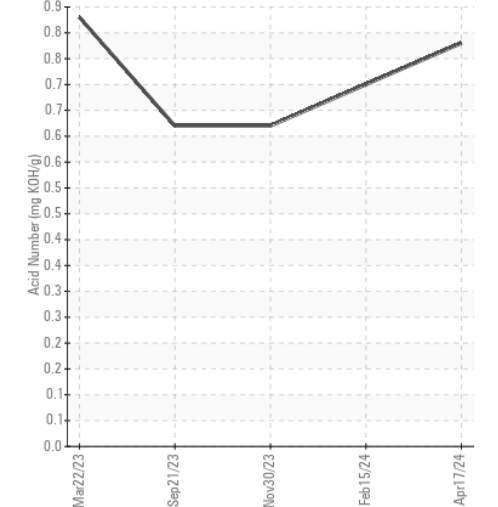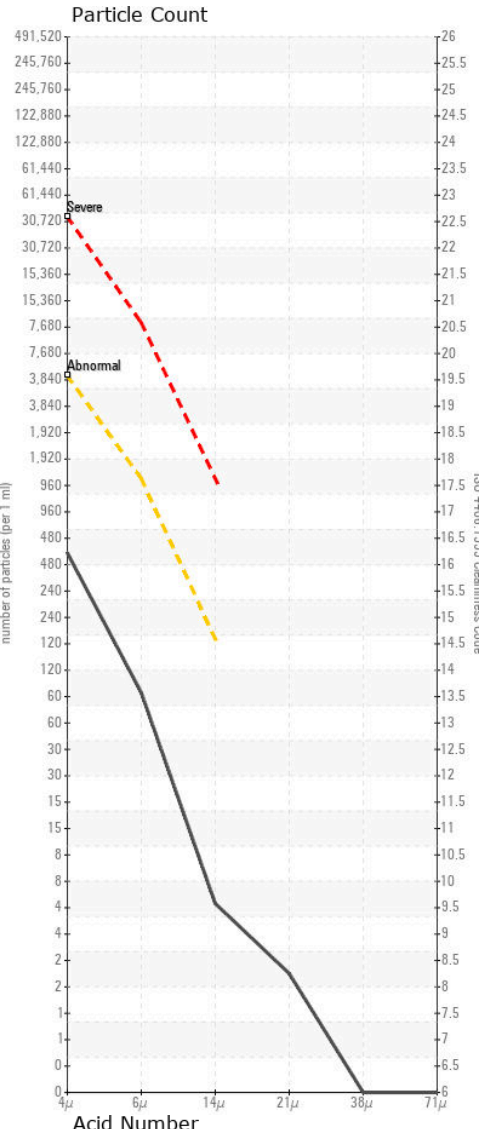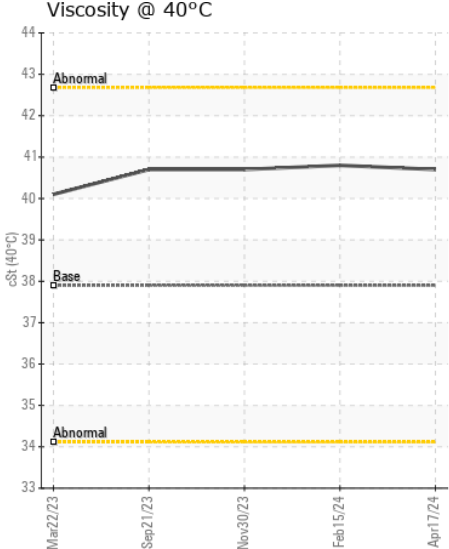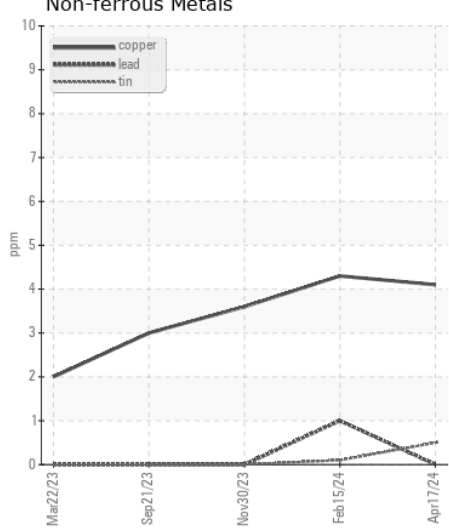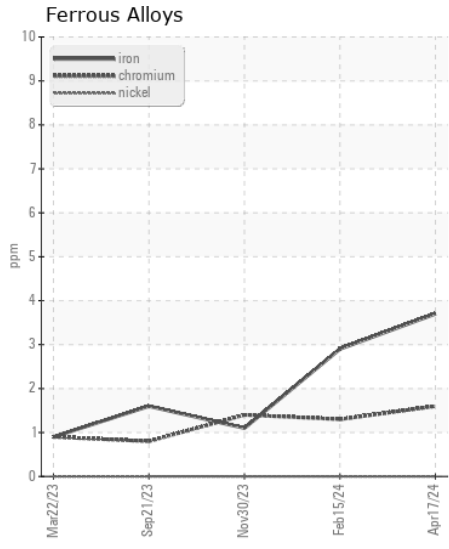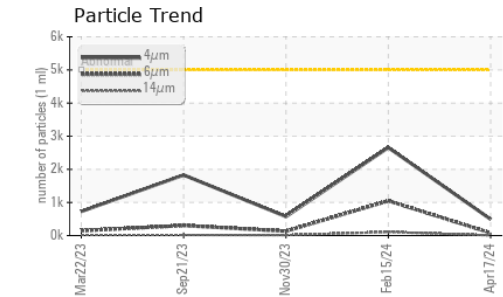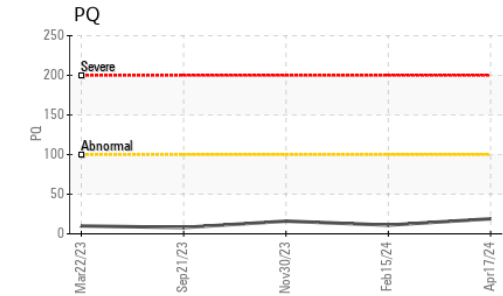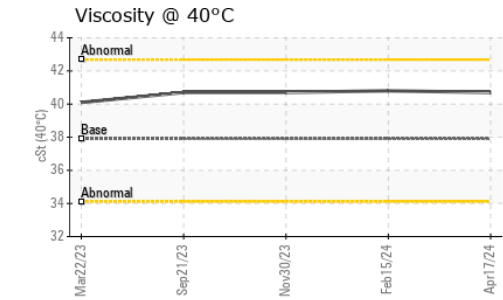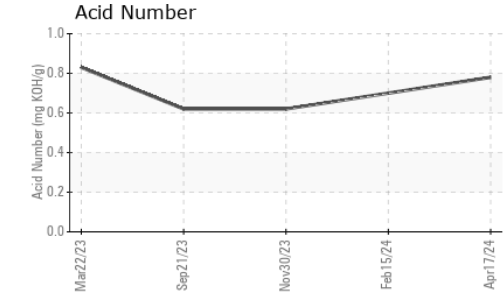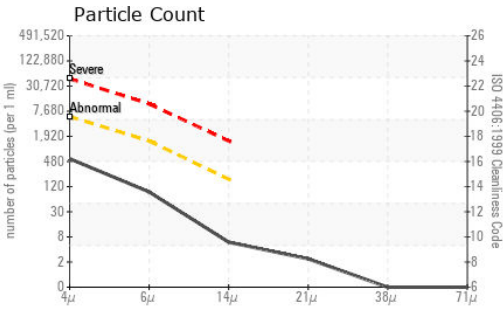

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0211356 **Received** : 18 Apr 2024
Lab Number : 06152976 **Tested** : 19 Apr 2024
Unique Number : 10983054 **Diagnosed** : 19 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

TITAN VIRGINIA READY MIX LLC
 5700 LAKEWRIGHT DR, SUITE 300
 NORFOLK, VA
 US 23502
 Contact: ROBERT TAUBER
 rtauber@titanamerica.com
 T: (571)436-2579
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)