



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HAMM HC 200I C WGH0H256KHAA00116
 Component
Rear Left Final Drive
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0210280	---	---
Sample Date		Client Info		15 Apr 2024	---	---
Machine Age	hrs	Client Info		298	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		323	---	---
Iron	ppm	ASTM D5185m	>500	171	---	---
Chromium	ppm	ASTM D5185m	>10	3	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	1	---	---
Copper	ppm	ASTM D5185m	>50	2	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	24	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	3	---	---
Boron	ppm	ASTM D5185m	400	12	---	---
Barium	ppm	ASTM D5185m	200	2	---	---
Molybdenum	ppm	ASTM D5185m	12	<1	---	---
Manganese	ppm	ASTM D5185m		5	---	---
Magnesium	ppm	ASTM D5185m	12	3	---	---
Calcium	ppm	ASTM D5185m	150	43	---	---
Phosphorus	ppm	ASTM D5185m	1650	2344	---	---
Zinc	ppm	ASTM D5185m	125	60	---	---
Sulfur	ppm	ASTM D5185m	22500	31064	---	---
Visc @ 40°C	cSt	ASTM D445	143	193	---	---

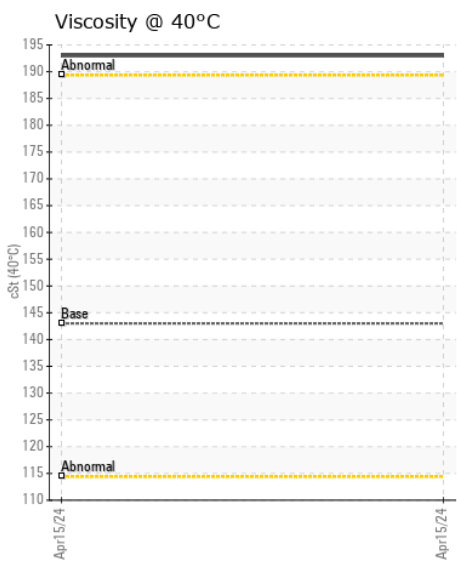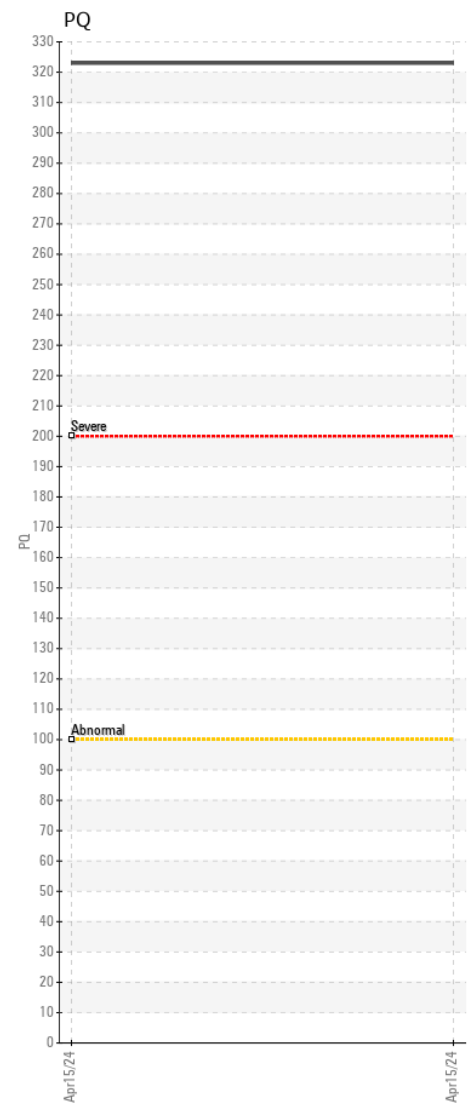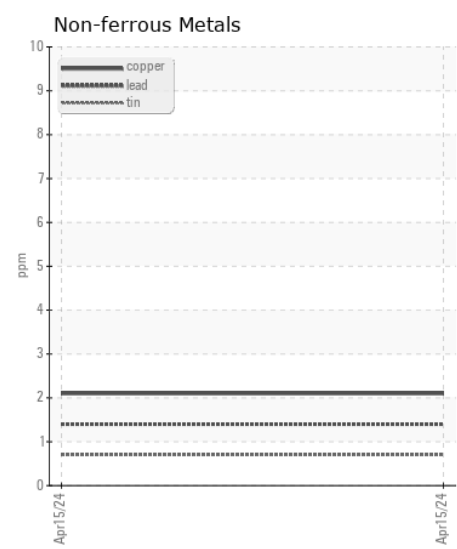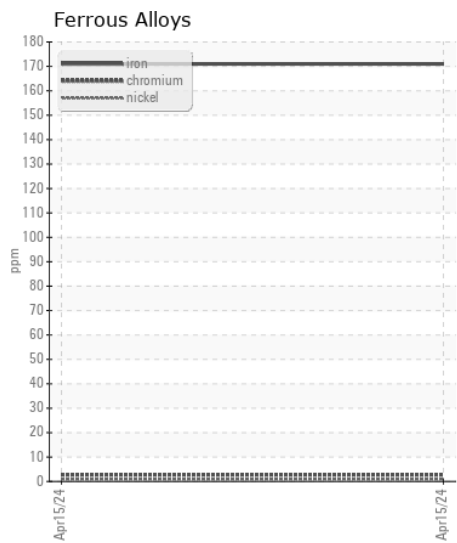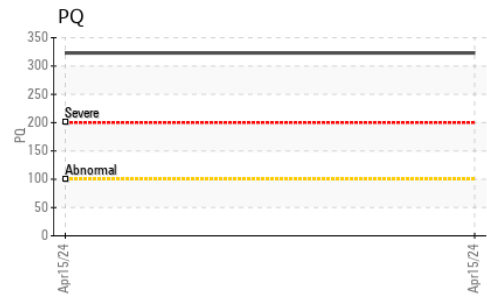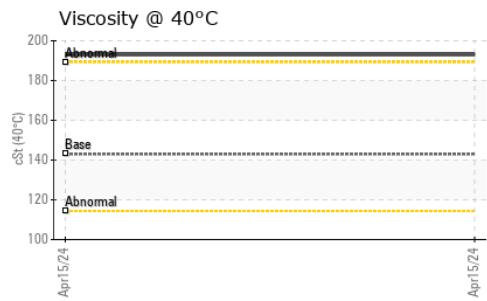

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0210280 **Received** : 18 Apr 2024
Lab Number : 06153404 **Tested** : 19 Apr 2024
Unique Number : 10983482 **Diagnosed** : 22 Apr 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - STEPHENSON
 245 YARDMASTER COURT
 STEPHENSON, VA
 US 22656-1761
 Contact: PHIL DAUGHERTY
 pdaugherty@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)