



# OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[473401]**

Machine Id

**SENNEBOGEN 830 830.0.3516**

Component

**Rear Right Final Drive**

Fluid

**VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)**

## RECOMMENDATION

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP433775</b>	---	---
Sample Date		Client Info		<b>12 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>2053</b>	---	---
Oil Age	hrs	Client Info		<b>1000</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Not Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

## WEAR

The copper level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>64</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>1</b>	---	---
Copper	ppm	ASTM D5185m	>50	<b>▲ 59</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>75	<b>8</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

## FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>8</b>	---	---
Boron	ppm	ASTM D5185m	379	<b>254</b>	---	---
Barium	ppm	ASTM D5185m	0.0	<b>48</b>	---	---
Molybdenum	ppm	ASTM D5185m	0.8	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m	0.0	<b>3</b>	---	---
Magnesium	ppm	ASTM D5185m	31	<b>4</b>	---	---
Calcium	ppm	ASTM D5185m	38	<b>21</b>	---	---
Phosphorus	ppm	ASTM D5185m	1077	<b>2615</b>	---	---
Zinc	ppm	ASTM D5185m	46	<b>52</b>	---	---
Sulfur	ppm	ASTM D5185m	23526	<b>44955</b>	---	---
Visc @ 40°C	cSt	ASTM D445	139	<b>144</b>	---	---


▲ Non-ferrous Metals

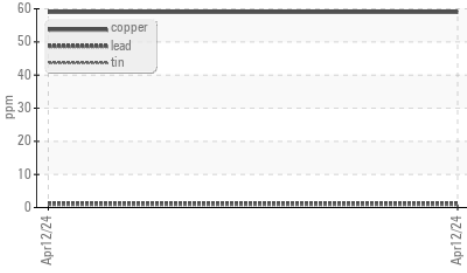


Viscosity @ 40°C

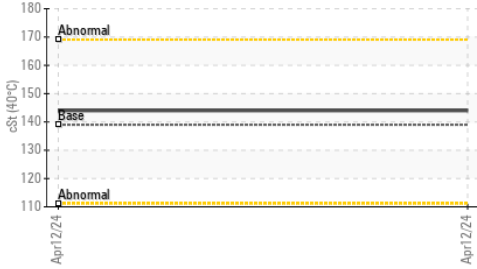


Iron (ppm)

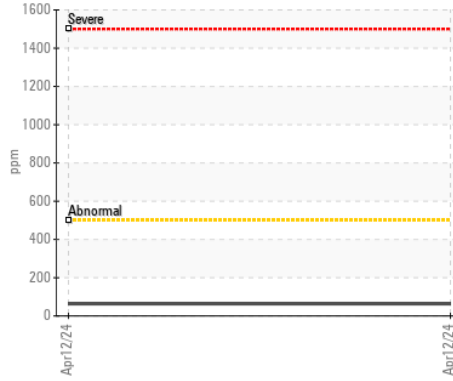


Aluminum (ppm)

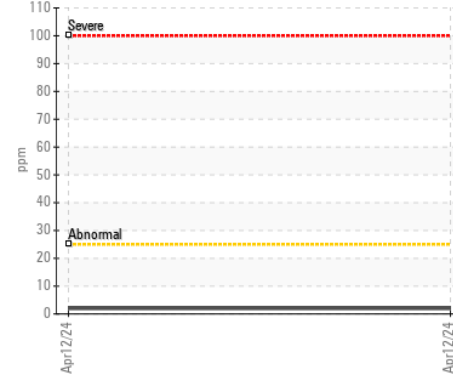


Lead (ppm)

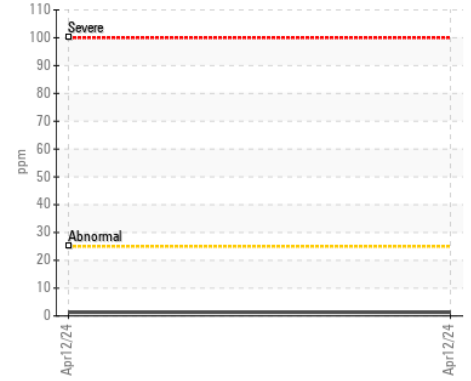


Chromium (ppm)

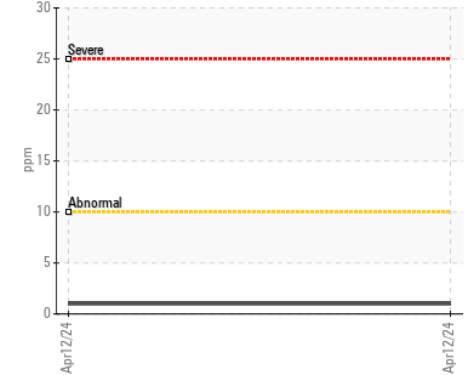


▲ Copper (ppm)

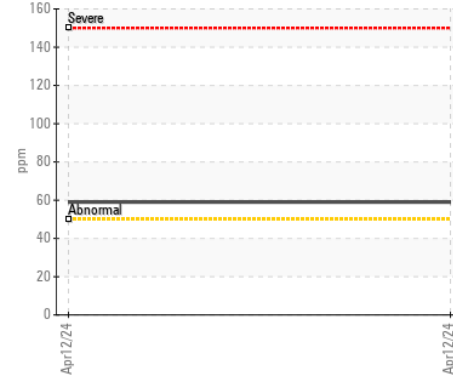


Silicon (ppm)

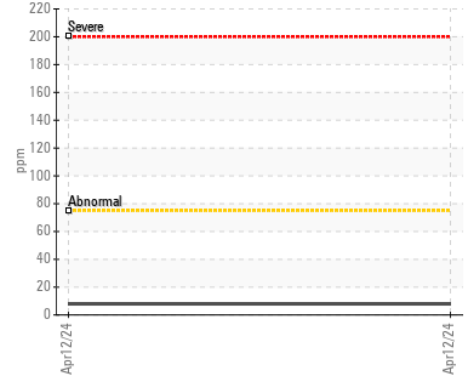

Viscosity @ 40°C

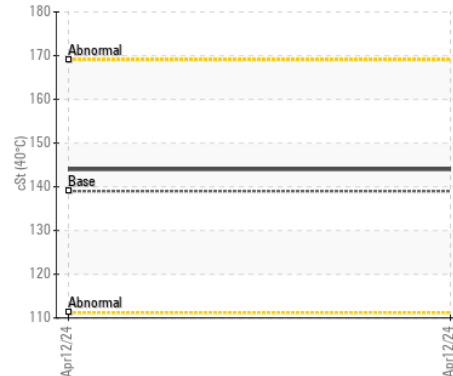

Additives

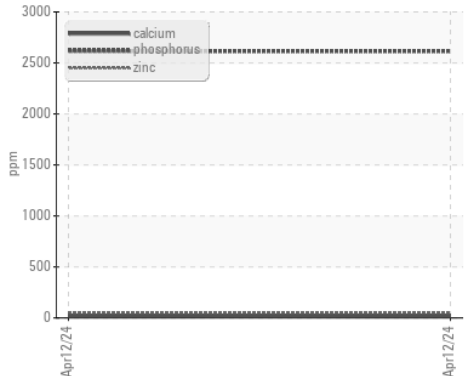

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP433775

Lab Number : 06153508

Unique Number : 10983586

Test Package : MOB 1

Received : 18 Apr 2024

Tested : 19 Apr 2024

Diagnosed : 22 Apr 2024 - Sean Felton

ALTA EQUIPMENT COMPANY

1035 WYLIE DRIVE

BLOOMINGTON, IL

US 61705

Contact: MIKE MARTIN

mike.martin@altaequipment.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)