



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
MAG MOLY BIG PLUS CI4 NT
 Component
New (Unused) Oil
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

This is a baseline read-out on the submitted sample.

WEAR

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0676280	---	---
Sample Date		Client Info		15 Apr 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---









Iron	ppm	ASTM D5185m		<1	---	---
Chromium	ppm	ASTM D5185m		0	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		2	---	---
Lead	ppm	ASTM D5185m		1	---	---
Copper	ppm	ASTM D5185m		0	---	---
Tin	ppm	ASTM D5185m		<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Silicon	ppm	ASTM D5185m		4	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water	%	ASTM D6304		NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---

FLUID CONDITION

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		<1	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		129	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		20	---	---
Calcium	ppm	ASTM D5185m		4956	---	---
Phosphorus	ppm	ASTM D5185m		1434	---	---
Zinc	ppm	ASTM D5185m		1658	---	---
Sulfur	ppm	ASTM D5185m		6628	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		2.28	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		14.79	---	---
Visc @ 40°C	cSt	ASTM D445		108.9	---	---
Visc @ 100°C	cSt	ASTM D445		14.29	---	---
Viscosity Index (VI)	Scale	ASTM D2270		133	---	---

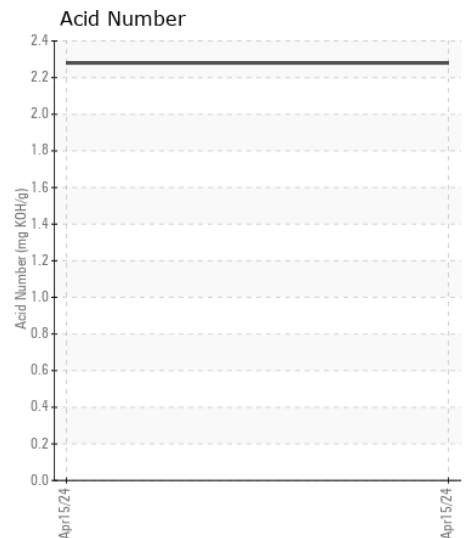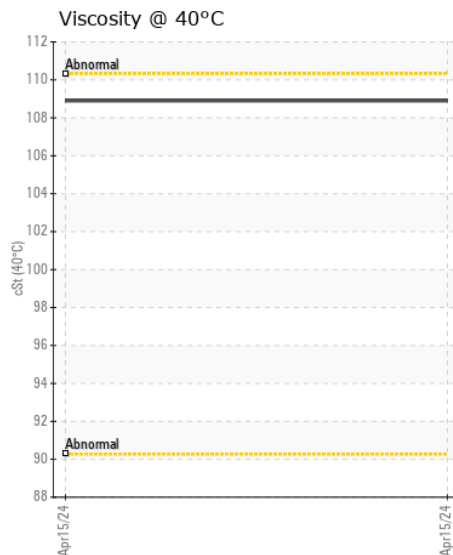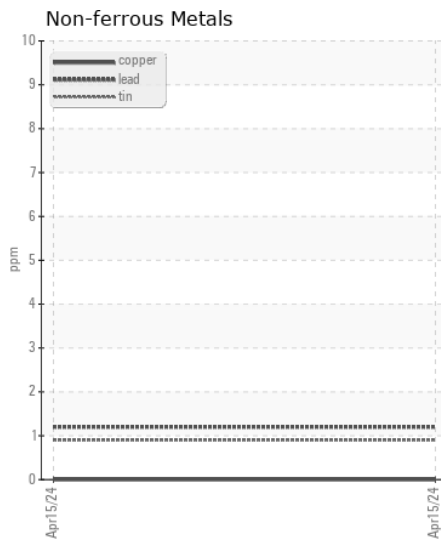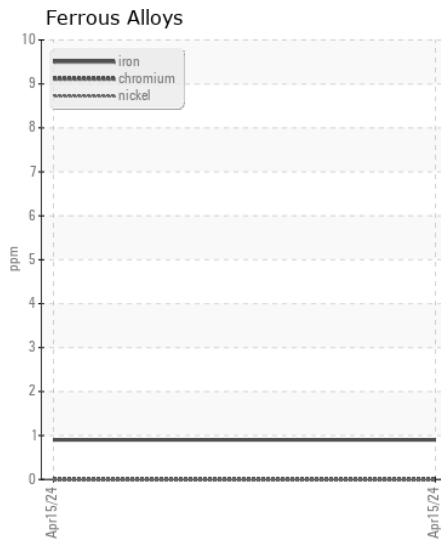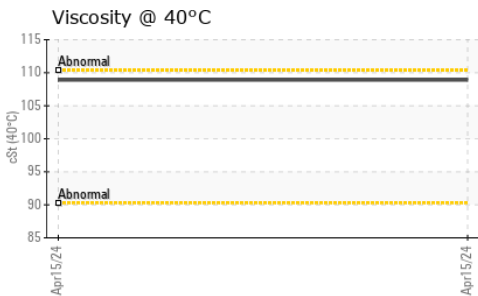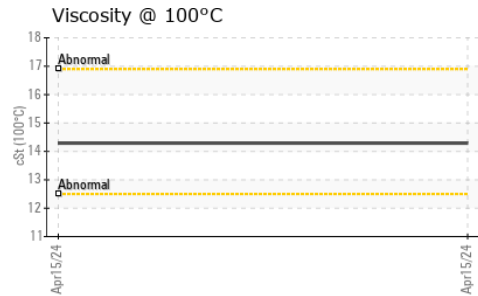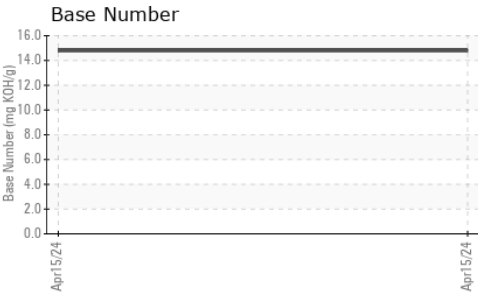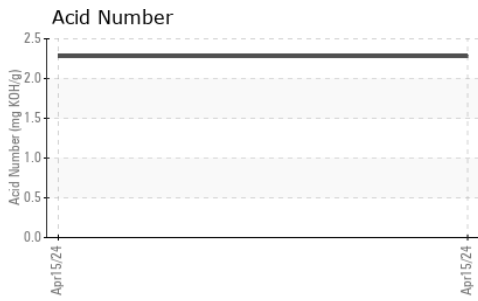

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0676280
Lab Number : 06153560
Unique Number : 10983638
Test Package : MOB 2 (Additional Tests: FT-IR, ICP-NewOil, KF, KV100, PrtCount, TBN, V

Received : 18 Apr 2024
Tested : 22 Apr 2024
Diagnosed : 23 Apr 2024 - Jonathan Hester

GAP REPAIR SHOP
 994 GAP RD
 KINZERS, PA
 US 17535
 Contact: EMANUEL ZOOK
 jchapman959@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (717)442-9670