



OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
870
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | WC0919692 | WC0852318 | WC0801235 |
| Sample Date | | Client Info | | 10 Apr 2024 | 13 Oct 2023 | 20 Jul 2023 |
| Machine Age | mls | Client Info | | 0 | 0 | 0 |
| Oil Age | mls | Client Info | | 0 | 0 | 0 |
| Filter Age | mls | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Filter Changed | | Client Info | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >100 | 5 | 4 | 5 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >4 | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 2 | 2 | 2 |
| Lead | ppm | ASTM D5185m | >40 | 1 | <1 | 0 |
| Copper | ppm | ASTM D5185m | >330 | <1 | 0 | 0 |
| Tin | ppm | ASTM D5185m | >15 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION

There is no indication of any contamination in the oil.


| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >25 | 4 | 4 | 4 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 2 | 2 |
| Fuel | | WC Method | >5 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >3 | 0.2 | 0.3 | 0.3 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 7.4 | 8.0 | 7.3 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 21.8 | 20.3 | 19.3 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | >158 | 3 | 0 | <1 |
| Boron | ppm | ASTM D5185m | 250 | 300 | 5 | 7 |
| Barium | ppm | ASTM D5185m | 10 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 100 | 77 | 59 | 71 |
| Manganese | ppm | ASTM D5185m | | <1 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m | 450 | 483 | 900 | 999 |
| Calcium | ppm | ASTM D5185m | 3000 | 1271 | 1003 | 1133 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 1060 | 979 | 1056 |
| Zinc | ppm | ASTM D5185m | 1350 | 1233 | 1191 | 1306 |
| Sulfur | ppm | ASTM D5185m | 4250 | 3605 | 2991 | 3987 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 16.1 | 16.3 | 14.6 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 8.5 | 6.9 | 8.8 | 8.7 |
| Visc @ 100°C | cSt | ASTM D445 | 14.4 | 13.1 | 13.0 | 12.7 |


FT-IR (Direct Trend)

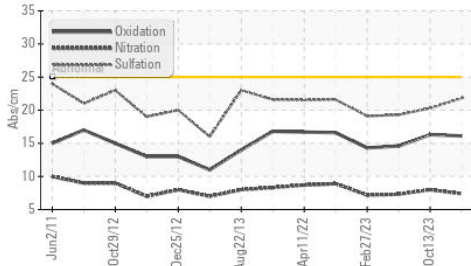


Base Number

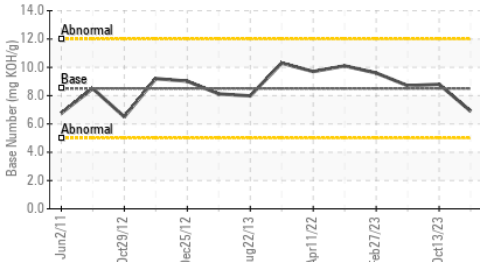


Viscosity @ 100°C

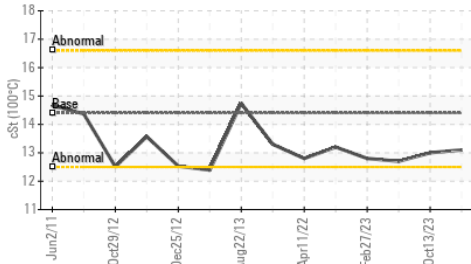


Ferrous Alloys

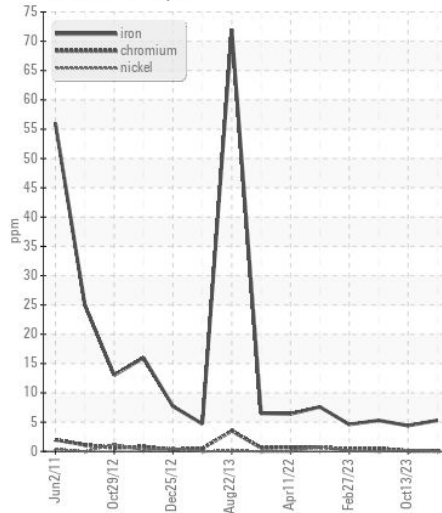


Non-ferrous Metals

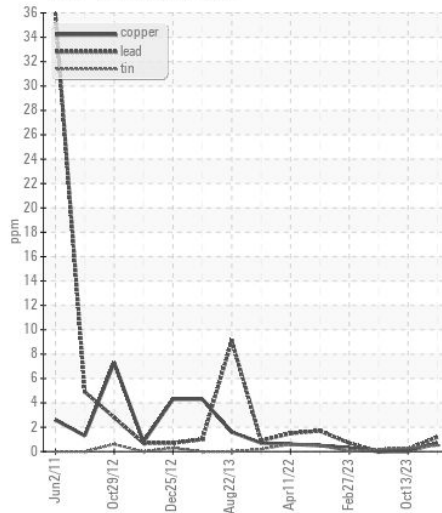

Viscosity @ 100°C

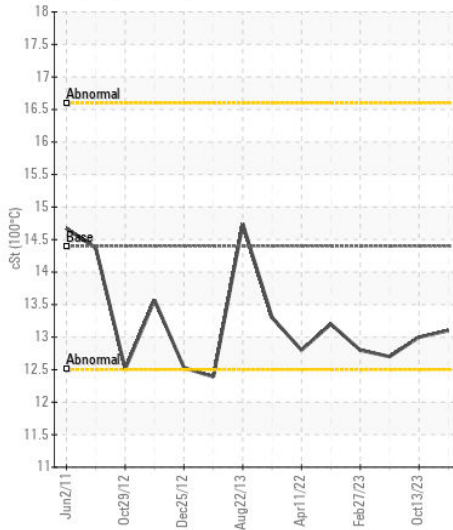

Base Number

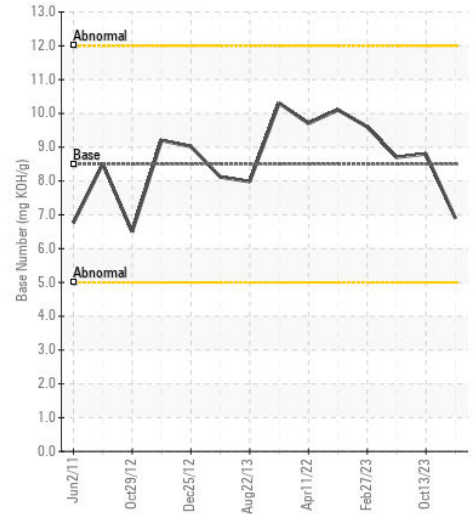

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0919692
Lab Number : 06153614
Unique Number : 10983692
Test Package : FLEET

Received : 18 Apr 2024
Tested : 19 Apr 2024
Diagnosed : 19 Apr 2024 - Wes Davis

SALEM NATIONALEASE CORPORATION
 198 PARK PLAZA DRIVE
 WINSTON SALEM, NC
 US 27105

Contact: Audrey Hopkins
 Audrey.Hopkins@salemcorp.com
 T: (336)767-9642

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: