



# OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**CHRISTOPHER CONTRACTING [A35176]**  
Machine Id  
**JOHN DEERE 524P 1DW524PAJMLZ12954**  
Component  
**Rear Differential**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (10 GAL)**

## RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. ( Customer Sample Comment: A35176 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WE0006561</b>	WE0005863	WE0004864
Sample Date		Client Info		<b>17 Apr 2024</b>	26 Dec 2023	16 Aug 2023
Machine Age	hrs	Client Info		<b>1945</b>	1512	1005
Oil Age	hrs	Client Info		<b>940</b>	474	1005
Filter Age	hrs	Client Info		<b>940</b>	474	500
Oil Changed		Client Info		<b>Changed</b>	Not Chngd	Not Chngd
Filter Changed		Client Info		<b>Changed</b>	Not Chngd	Changed
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR

Bearing and/or bushing wear is indicated.

PQ		ASTM D8184		<b>25</b>	29	24
Iron	ppm	ASTM D5185m	>500	<b>90</b>	79	81
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	2
Lead	ppm	ASTM D5185m	>25	<b>▲ 63</b>	▲ 60	▲ 52
Copper	ppm	ASTM D5185m	>100	<b>▲ 382</b>	▲ 377	▲ 380
Tin	ppm	ASTM D5185m	>10	<b>2</b>	2	2
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>6</b>	5	8
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	1
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>5</b>	3	2
Boron	ppm	ASTM D5185m	6	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	2
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	2
Manganese	ppm	ASTM D5185m		<b>2</b>	1	2
Magnesium	ppm	ASTM D5185m	145	<b>89</b>	91	107
Calcium	ppm	ASTM D5185m	3570	<b>3218</b>	3353	3806
Phosphorus	ppm	ASTM D5185m	1290	<b>952</b>	919	1120
Zinc	ppm	ASTM D5185m	1640	<b>983</b>	1116	1339
Sulfur	ppm	ASTM D5185m		<b>3836</b>	3180	4325
Visc @ 40°C	cSt	ASTM D445	57.0	<b>52.9</b>	53.8	54.2

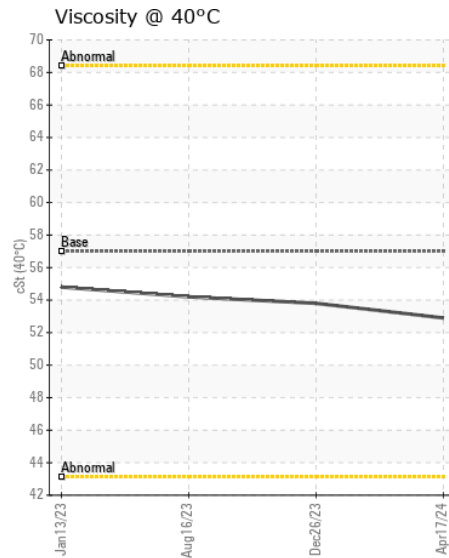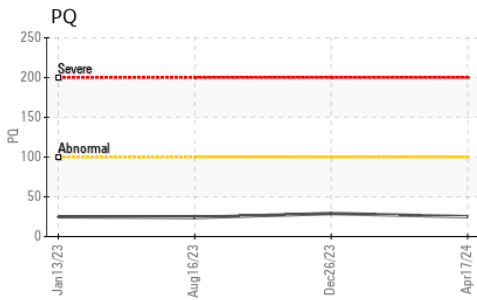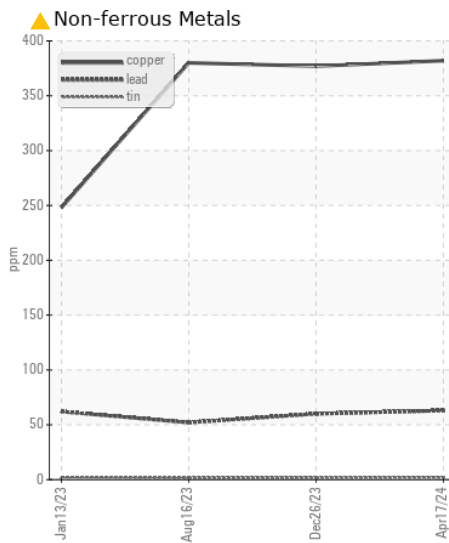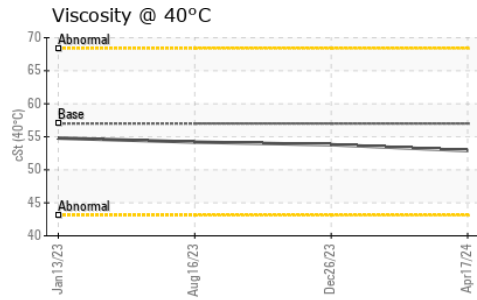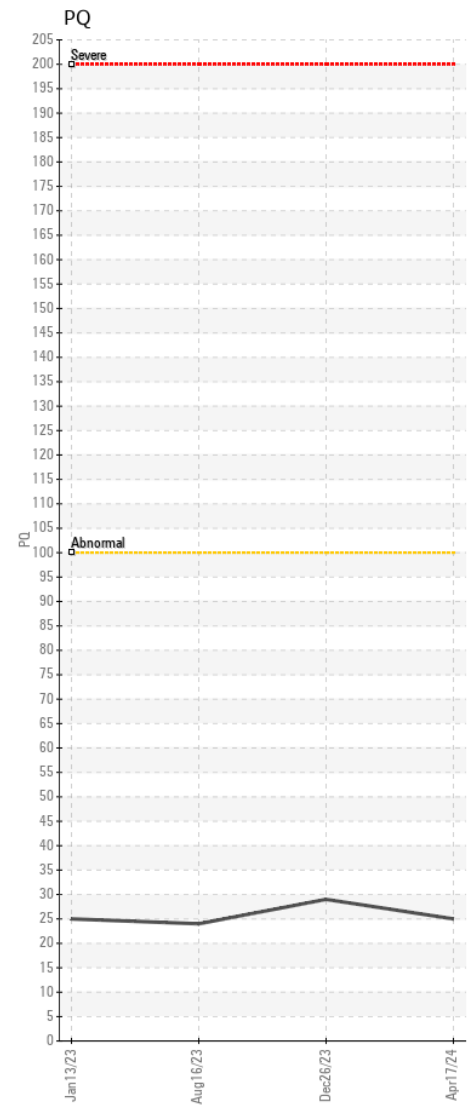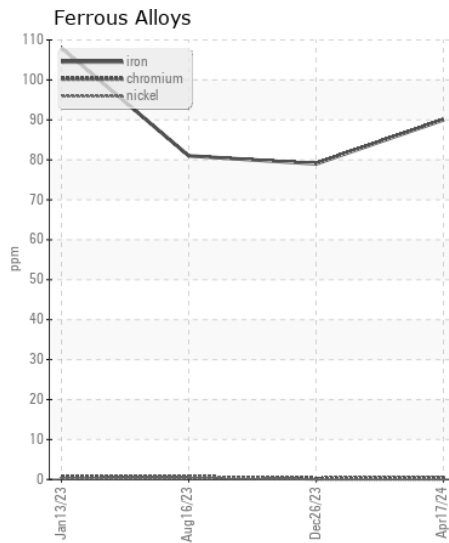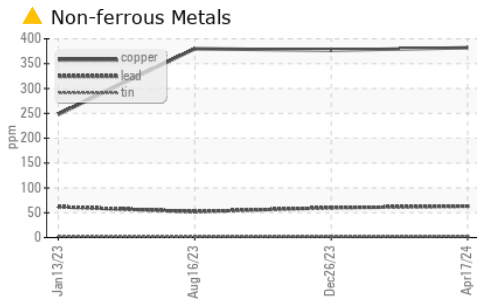

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WE0006561 **Received** : 19 Apr 2024  
**Lab Number** : 06154759 **Tested** : 22 Apr 2024  
**Unique Number** : 10990182 **Diagnosed** : 23 Apr 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**WARRIOR TRACTOR AND EQUIPMENT - HUNTSVILLE**  
 25135 ONE AVIATION WAY SW  
 MADISON, AL  
 US 35756  
 Contact: BOBBY LUCKY  
 warriorparts033@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: