



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[SPM688436]

Machine Id

SENNEBOGEN 835ME 835.0.3070

Component

Front Right Final Drive

Fluid

GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP427255	VCP433803	VCP411400
Sample Date		Client Info		22 Mar 2024	11 Jan 2024	11 Aug 2023
Machine Age	hrs	Client Info		3312	3166	2080
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	95	144	214
Chromium	ppm	ASTM D5185m	>10	0	<1	2
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	1	2	3
Lead	ppm	ASTM D5185m	>25	<1	0	<1
Copper	ppm	ASTM D5185m	>50	43	37	▲ 80
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	21	16	5
Potassium	ppm	ASTM D5185m	>20	1	<1	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	MODER	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	2	4	10
Boron	ppm	ASTM D5185m	400	10	19	32
Barium	ppm	ASTM D5185m	200	11	30	111
Molybdenum	ppm	ASTM D5185m	12	1	<1	<1
Manganese	ppm	ASTM D5185m		3	4	8
Magnesium	ppm	ASTM D5185m	12	36	37	0
Calcium	ppm	ASTM D5185m	150	2135	1776	33
Phosphorus	ppm	ASTM D5185m	1650	876	912	1369
Zinc	ppm	ASTM D5185m	125	980	737	58
Sulfur	ppm	ASTM D5185m	22500	7336	13172	32789
Visc @ 40°C	cSt	ASTM D445	143	196	176	151

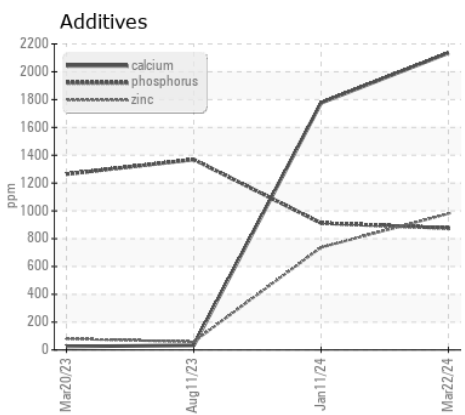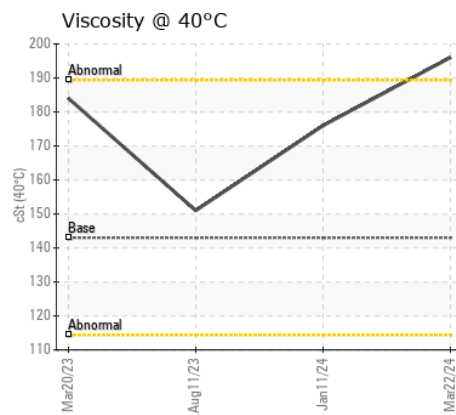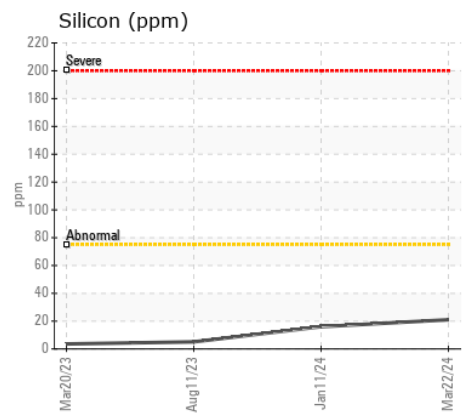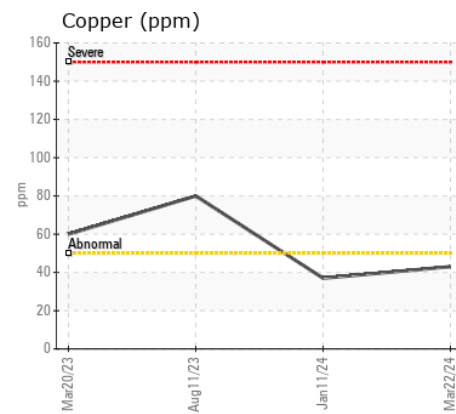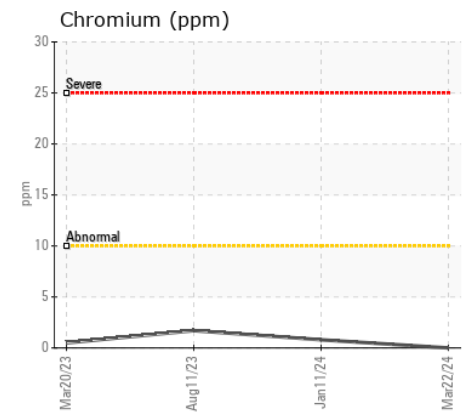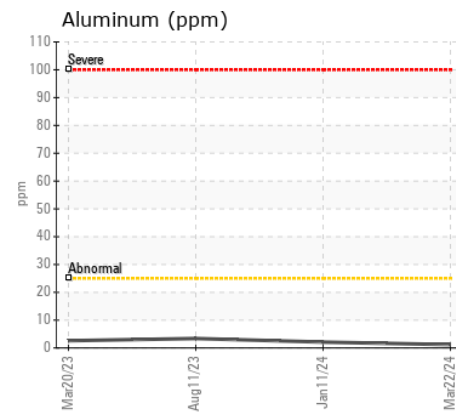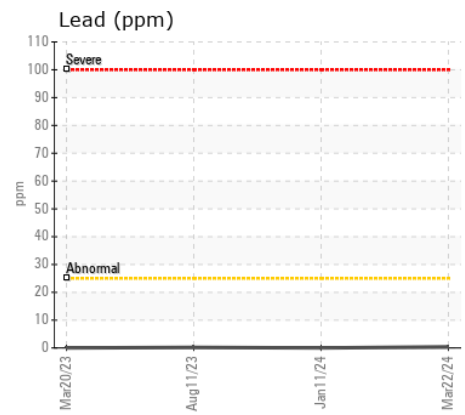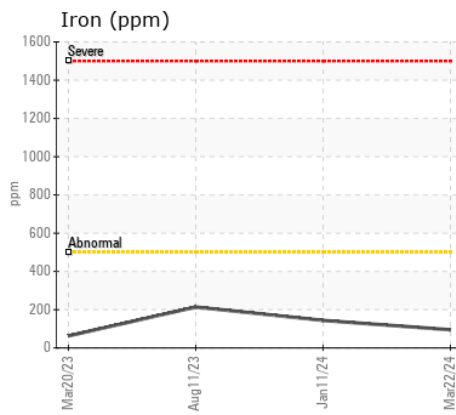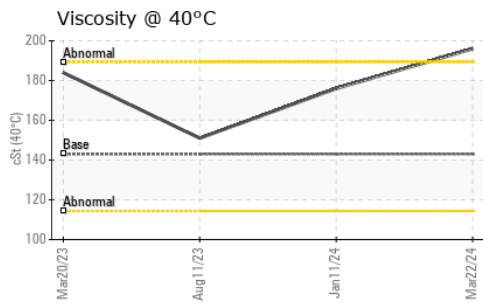

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP427255 **Received** : 19 Apr 2024
Lab Number : 06154835 **Tested** : 22 Apr 2024
Unique Number : 10990258 **Diagnosed** : 23 Apr 2024 - Don Baldrige
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BELSON STEEL
 1685 N STATE RTE 50
 BOURBONNAIS, IL
 US 60914
 Contact: M. POZAN
 mpozan@belsonsteel.com
 T: (815)932-7416
 F: